

OUR STORY

For over 60 years, Southwire has provided high quality electrical wire and cable to the commercial and industrial construction industries. Now, the name you trust provides durable, cutting-edge professional grade tools, designed with safety and productivity in mind. Look to Southwire for solutions to all your electrical needs, from electrician's hand tools, meters, contractor equipment, temporary power, and extension cords.

Southwire, The Company

Southwire Company, LLC is North America's leading manufacturer of wire and cable used in the distribution and transmission of electricity. Throughout its history, our company has sought to help provide power through our products, our service and by helping empower our customers, employees, and communities. With more than 6,800 people at customer service centers, manufacturing facilities and sales offices throughout North America, we are dedicated to developing the highest-quality products and legendary service.

Southwire, The People

With more than 6,800 people at customer service centers, manufacturing facilities and sales offices throughout North America, we are dedicated to developing the highest-quality products and legendary service.

The Drive For Excellence


Driving for excellence starts with being responsive to our customers and the markets we serve. By creating business units, Southwire Company enables each to foster an entrepreneurial spirit, innovative solutions, and responsiveness required in today's business. At the same time each division can leverage the resources and rich history of Southwire Company as a whole.

The Products

To be successful requires products that give you solutions no matter what stage of the project cycle you are in. Our product teams and dedicated resources work together to listen to and work with our customers, creating solutions that deliver unparalleled value through product innovation, safety and efficiency.

The Service


Service is more than a word or a phone number; it's a tangible support system that assists you through the entire project cycle. Starting with our own knowledgeable customer service team, to our National Field Sales team, and our District Merchandising Specialists. In the office or in the field, we're there to lend a hand, just when you need it most. Feel free to reach us at 1-855-SWTOOLS (855-798-6657).

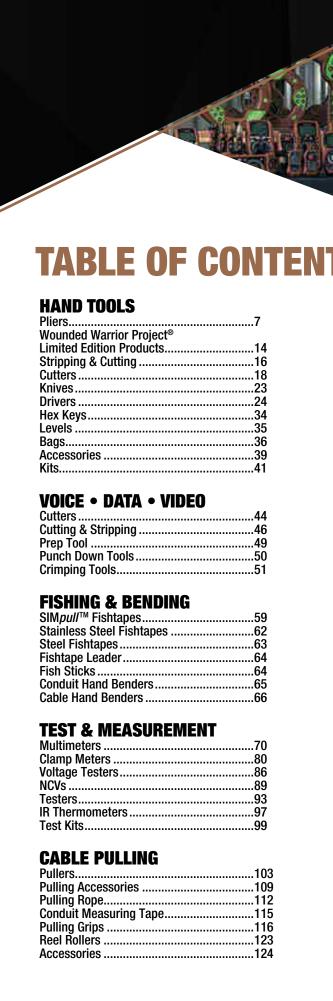



S	
TERMINATION Cable Strippers	126
CONDUIT BENDING Benders PVC Blankets Plug Kits	136
HOLE MAKING KnockoutsLayout ToolDrive Units	145
Hole Saws Auger Bits Drill	147 148
MATERIAL HANDLING Flange Reel Stands Reel Jacks Axle & Riser	155 158
SIM <i>pull™ Coil</i> Pak™ Utility Carts Hand Trucks Wire Wagon® Carts Wire Carts Caddy Mac™	162 163 167 168
Caddies Stor Mac™ Weldbox™ Cabinets Piano Boxes	174 175



THE Southwire = ADVANTAGE

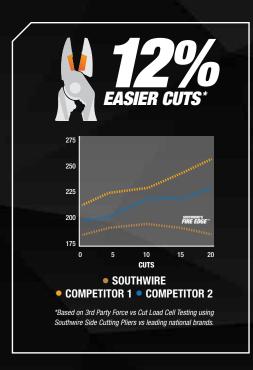





THE Southwire ADVANTAGE

REAMING HEAD

12AWG SOL WIRE STRIPPER

FIRE EDGE™ BLADES

FIRE RIVET™ TECHNOLOGY

6-32 & 8-32 BOLT SHEARS

CRIMPER & FISHTAPE PULLER

GUARANTEED FOR LIFE

SCP9TPCB COMPETITOR 1

Your hands are your most important tools, the ones you need for every job. Equip them with high-quality, durable hand tools from Southwire. With a strong yet comfortable design and no-hassle lifetime warranty*, you can rely on these tools to make your life easier and last through years of hard work.



HIGH LEVERAGE SIDE CUTTING PLIERS






- · Induction-hardened cutting blades ensure efficient and lasting cutting surfaces for hard and soft wire
- · Drop forged CRV steel for durability
- · File teeth on jaws help remove burrs in conduit
- Curved ergonomic handle for comfortable use



SPECIFICATIONS

COMFORT GRIP

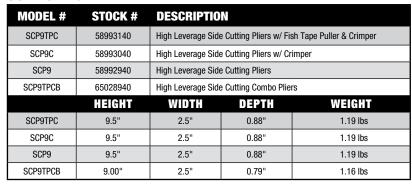











DIPPED GRIP

MODEL #	STOCK #	DESCRIPTION		
SCP9D	58289840	High Leverage Diagonal Cutting Pliers w/ Dipped Handle		
SCP9CD	58749140	High Leverage Diagonal Cutting Pliers w/ Crimper Dipped Handles		
	HEIGHT	WIDTH	DEPTH	WEIGHT
SCP9D	9.5"	2.13"	0.75"	1.19 lbs
SCP9CD	9.5"	2.13"	0.75"	1.19 lbs





LONG NOSE PLIERS



Southwire long nose pliers provide a better grip without sacrificing tool strength or durability.

- Knurled jaws for sure-gripping
- Drop forged CRV steel for durability
- · High leverage, hot rivet design for smooth action and no handle wobble
- . Long nose design for forming and looping wire and handling small parts
- · Precision induction-hardened cutting knives for long-lasting cutting edge



SPECIFICATIONS DIPPED GRIP

MODEL #	STOCK #	DESCRIPTION		
LNP8SD	58289740	8" Hvy. Dty. Long Nose Pliers Side Cutting Stripper Dipped Handle		
LNP7D	58749040	7" Long Nose Pliers w/ Side Cut Dipped Handle		
	HEIGHT	WIDTH	DEPTH	WEIGHT
LNP8SD	8.38"	2.13"	0.63"	0.64 lbs
LNP7D	7.38"	2.13"	0.63"	0.38 lbs





HIGH LEVERAGE DIAGONAL CUTTING PLIERS



The high leverage design of these diagonal cutting pliers provides greater cutting power while the hot riveted joint ensures smooth action with no handle wobble.

- Drop forged CRV steel for durability
- · Induction hardened cutting blades ensure efficient and lasting cutting surfaces
- . High leverage design provides maximum cutting power
- · Hot riveted pivot joint provides smooth action and no wobble
- · Effectively cuts most hardened wire, ACSR, bolts, screws, and nails





SPECIFICATIONS

COMFORT GRIP



MODEL #	STOCK #	DESCRIPTION			
DCP8	58993340	8" High Leverage Diagonal Cutting Pliers			
DCPA8	58993240	8" High Leverage Diagonal Cutting Pliers w/ Angled Head			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
DCP8	8.25"	2.25"	0.75"	0.73 lbs	
DCPA8	8.25"	2.25"	0.75"	0.73 lbs	





DIPPED GRIP

MODEL #	STOCK #	DESCRIPTION			
DCP8D	58289440	8" High Leverage Diagonal Cutting Pliers w/ Dipped Handle			
DCPA8D	58289540	8" High Leverage Diagonal Cutting Pliers w/ Angled Head and Dipped Handle			
DCP6D	58739940	6" High Leverage Diagonal Cutting Pliers Dip Handle			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
DCP8D	8"	2"	0.63"	0.61 lbs	
DCPA8D	8"	2"	0.63"	0.61 lbs	
DCP6D	6"	2"	0.63"	0.40 lbs	





CABLE CUTTERS



The hook jaws grab and hold cable while the shear cutting action allows for clean cuts.

- · Heat treated, precision ground blades ensure clean cuts
- · Comfortable cushion grips reduce hand fatigue
- · Forged steel with black-oxide finish for long life
- High leverage pivot joint ensures smooth action and no handle wobble

CCP9DE





CCPR400S





CCPR1K



SPECIFICATIONS COMFORT GRIP

MODEL #	STOCK #	DESCRIPTION			
CCP9	58993540	9" High Leverage Cable Cutter			
CCP350	59158540	350 MCM 16" Ca	ble Cutter		
CCP750	58738240	750 MCM 31" Fib	750 MCM 31" Fiberglass Handle Cable Cutter		
CCPR400	58277740	750 MCM Ratche	750 MCM Ratcheting Cable Cutter		
CCPR400S	59556240	600 MCM Ratcheting Cable Cutter			
CCPR1K	58738340	1K MCM Ratcheting with Telescoping Handles			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
CCP9	9.38"	2.13"	0.63"	0.94 lbs	
CCP350	18.90"	4.53"	1.18"	2.55 lbs	
CCP750	31"	5.32"	1.23"	5.50 lbs	
CCPR400	13.78"	6.81"	1.57"	0.51 lbs	
CCPR400S	9.25"	5.71"	1.57"	1.54 lbs	
CCPR1K	16.20"	7.10"	2.70"	7.33 lbs	

DIPPED GRIP

MODEL #	STOCK #	DESCRIPTIO	N	
CCP9DE	64323040	9" High-Leverage Cable Cutters w/ Ergonomic Dipped Handle 6 1/2" Cable Cutting Shears w/ Dipped Handle		
CCP6D	58748940			
	HEIGHT	WIDTH	DEPTH	WEIGHT
CCP9DE	9.25"	1.8"	0.62"	1 lbs
CCP6D	6.75"	2"	0.75"	0.51 lbs





TERMINAL CRIMPING I CUTTING PLIERS



These high leverage crimping pliers have two die positions that permit the tool to crimp insulated and non-insulated terminals and ferrules.

- · Tapered nose for working in confined spaces
- Crimps 10-22 AWG solderless terminals and connectors
- · Specially hardened wire cutter in nose
- · Curved handle and ergonomic molded grip for comfortable use
- Crimps insulated and non-insulated terminals and connectors

MODEL #	STOCK #	DESCRIPTIO	N	
TCC9	58993640	Terminal Crimper Cutter w/ Comfort Grip Handle		
TCC9D	58289940	Terminal Crimper Cutter w/ Dipped Handle		
	HEIGHT	WIDTH	DEPTH	WEIGHT
TCC9D	9.75"	2.38"	0.63"	0.79 lbs
TCC9	9.38"	1.88"	0.75"	0.86 lbs



MULTI-TOOL PLIERS











Versatile spring action pliers that perform multiple functions.

- · Grip, strip, crimp, ream, shear, and cut
- Narrow knurled jaw allows access to tight spaces
- · Cuts small gauge copper wire and communication cables
- Crimps common size wire ferrules
- · Reams and smooths thin-wall conduit ends
- . Easily strips 10-14 AWG solid wire
- Durable forged construction for lasting performance
- · Comfortable grips minimize hand wear and fatigue
- •Strips:
 - S7N1HD: 10-14 AWG Solid, 12-16 Stranded
 - S816S0LHD: 8-16 AWG Solid, 10-18 Stranded
 - SNM1214HD: 12/2 and 14/2 Romex

	DESCRIPTION		
65028440	7-in-1 Long Nose	Multi-Tool Plier	
58993940	5-in-1 Multi-Tool	Plier	
65028140	Forged Wire Stripper 8-16 AWG Solid 10-18 AWG Stranded		
65028240	Forged Romex Stripper 12-14 AWG Solid w/ Ergo Grip		
HEIGHT	WIDTH	DEPTH	WEIGHT
10.24"	3.54"	0.98"	0.79 lbs
10.10"	3.54"	0.70"	0.65 lbs
10.24"	3.54"	0.98"	0.71 lbs
10.04"	3.54"	0.79"	0.74 lbs
	58993940 65028140 65028240 HIEIGHT 10.24" 10.10" 10.24"	58993940 5-in-1 Multi-Tool 65028140 Forged Wire Strip 65028240 Forged Romex Str HEIGHT WIDTH 10.24" 3.54" 10.10" 3.54" 10.24" 3.54"	58993940 5-in-1 Multi-Tool Plier 65028140 Forged Wire Stripper 8-16 AWG Solid 65028240 Forged Romex Stripper 12-14 AWG S HEIGHT WIDTH DEPTH 10.24" 3.54" 0.98" 10.10" 3.54" 0.70" 10.24" 3.54" 0.98"







MULTI-PURPOSE SIDE CUTTING PLIER




Multi-purpose side cutting plier cuts ACSR, screws, nails, and most hardened wire.

- Drop forged construction for durability
- High-leverage pivot joint for easier cuts
- Strips 8-14 AWG solid and 10-16 stranded
- 6-32 and 8-32 screw shearing

MODEL #	STOCK #	DESCRIPTION		
MPSCP	59724440	Multi-Purpose Side Cutting Plier		
	HEIGHT	WIDTH	DEPTH	WEIGHT
MPSCP	11.38"	3.75"	1.50"	0.6 lbs







MADE IN USA PLIERS - WOUNDER WARRIOR PROJECT®

SCP9TPCD-WW





TCC9D-WW







Made from American forged steel, these tools are built to withstand jobsite wear and tear. Assembled with hot rivet technology, these pliers are designed to be the livelihood of every professional. **Proudly supporting Wounded Warrior Project®.**

- · Hot riveted pivot joint for smooth action
- Induction hardened
- Hand sharpened blades
- Drop forged USA steel for durability

MODEL #	STOCK #	DESCRIPTIO	N		
SCP9TPCD-WW	67038040		ligh-Leverage Side er, Crimper, & Dipp		
DCPA8D-WW	67038340		Made in USA 8" Angled Head High-Leveraç Diagonal Cutting Pliers w/ Dipped Handles		
CCP9D-WW	67038940	Made in USA 9" F w/ Dipped Grip Ha	e Cutters		
TCC9D-WW	67038640	Made in USA 9" Terminal Crimper/Cutter w/ Dipped Grip Handles			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
SCP9TPCD-WW	11.75"	3.88"	11.75"	1.1 lbs	
DCPA8D-WW	10.13"	3.88"	10.13"	0.6 lbs	
CCP9D-WW	11.75"	3.88"	11.75"	1.05 lbs	
TCC9D-WW	11.75"	3.88"	11.75"	0.9 lbs	



MADE IN USA WIRE STRIPPERS - WOUNDER WARRIOR PROJECT®

\$1018\$0L-WW

\$1020\$0L-WW



Made from durable, heat-treated steel, the Made in USA wire strippers & cutters are equipped to handle day-to-day jobsite demands. Proudly supporting the Wounded Warrior Project®.

- · Double-dipped grip for comfortable fit
- · Serrated nose holds cable for easy twisting and pulling
- Spring-loaded for self-opening action

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION			
S1018S0L-WW	67039540	10-18 AWG Solid Wire Stripper Ergo Handles			
S1020S0L-WW	67039240	10-20 AWG Solid Wire Stripper Compact Handles			
SNM1214HH-WW	67039840	Romex® Brand B0XJaw ™ Wire Stripper			
	HEIGHT	WIDTH DEPTH WEIGHT			
S1018S0L-WW	8.5"	4"	0.5"	0.37 lbs	
S1020S0L-WW	8.5"	4"	0.5"	0.32 lbs	
SNM1214HH-WW	9.75"	4"	1.5"	0.4 lbs	

SNM1214HH-WW







WIRE STRIPPERS & CUTTERS









Made of stainless steel, these wire strippers have precision ground stripping holes and are fitted with comfortable double-dipped plastic grips.

- · Stainless steel construction is durable and rust-proof
- Serrated nose grasps the cable for easy twisting and pulling
- Double-dipped grip provides comfortable feel
- · Spring loaded for self-opening action
- Specially designed cutting blades provide fast and clean wire stripping and cutting

MODEL #	STOCK #	DESCRIPTIO	N			
S1018S0L	58278040	Wire Stripper Cutt	er 10-18S0L;12-20	Stranded Ergonomic Handle		
S1018STR	58278140	Compact Stripper	Cutter 10-18 AWG	Solid		
S612STR	58277940	Wire Stripper Cut	ter 6-12 AWG Stran	ded Ergonomic Handle		
S1626STR	58278240	Compact Stripper	Compact Stripper Cutter 16-26 AWG Stranded			
	HEIGHT	WIDTH	DEPTH	WEIGHT		
S1018S0L	7.63"	2.38"	0.69"	0.33 lbs		
S1018STR	6.25"	2.5"	0.69"	0.29 lbs		
S612STR	7.38"	2.5"	2.5" 0.63" 0.33 lbs			
S1626STR	6.25"	2"	0.69"	0.28 lbs		







WIRE STRIPPERS & CUTTERS



Made of stainless steel, these wire strippers have precision ground stripping holes and are fitted with comfortable double-dipped plastic grips.

- Stainless steel* construction is durable and rust-proof
- Serrated nose grasps the cable for easy twisting and pulling
- · Specially designed cutting blades provide fast and clean wire stripping and cutting
- · Double-dipped grip provides comfortable fit
- Spring loaded for self-opening action (on models SNM1012, SNM1214)







SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION					
SNM1012	58278440	NM Cable Stripper	r Cutter 10-12 AWG	Ergonomic Handle			
SNM1214	58278540	NM Cable Stripper	r Cutter 12-14 AWG	Ergonomic Handle			
MP61	58278940	6-in-1 Multipurpo	se Stripper				
MPLN	58278840	Long Nose Multip	urpose Tool				
SVN	58278740	Wire Stripper V-N	otch				
	HEIGHT	WIDTH	DEPTH	WEIGHT			
SNM1012	8.13"	2.19"	0.69"	0.36 lbs			
SNM1214	7.88"	2.19"	0.69"	0.36 lbs			
MP61	9"	2.38"	0.69"	0.43 lbs			
MPLN	8.5"	2.38"	2.38" 0.75 0.36 lbs				
SVN	5.25"	2.31"	0.44"	0.14 lbs			

*Excludes SVN

ELECTRICIAN'S SCISSORS

ES001



Unlike regular scissors or shears, the serrated blades keep wire from slipping out of the jaws, so that cutting through hardware cloth, cable, wire netting, and other difficult-to-cut materials becomes an easy task.

- Durable nickel-plated steel for resistance from rust and corrosion
- Strips 19 AWG & 23 AWG
- · Scraper and file on outside of both blades

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N		
ES001	58283540	Electrician's Sciss	Electrician's Scissors		
	HEIGHT	WIDTH	DEPTH	WEIGHT	
ES001	5.38"	2.19"	0.38"	0.19 lbs	

PLASTIC PIPE CUTTER



Our plastic pipe and tube cutter has non-slip grips and a strong stainless steel blade that makes cutting plastic tubing easy.

- · Easily performs flush cuts on rigid plastic tubing
- Durable design for rugged use
- · Locking latch allows easy one-handed operation
- Cuts up to 3/4" PVC and 1-5/8" flexible tubing

MODEL #	STOCK #	DESCRIPTIO	N	
PLACUT	58282140	Plastic Pipe Cutter	r	
	HEIGHT	WIDTH	DEPTH	WEIGHT
PLACUT	8.75"	1.83"	1.17"	0.35 lbs

ROTO-SPLIT® CUTTERS





The RS-101-WW will become your everyday cutter for MC Cable. It features a thumb screw to clamp and release the cable. It is simple, straight forward, and easy to use. You'll never do another MC Cable job without it. Proudly made in the USA.

- Cuts and strips any armored cable from AWG 14-2 to 10-4 as well as AC, MC & HCF cables
- After initial setting only a half turn of the thumb screw is needed to clamp or release the cable
- . Make cuts quickly and easily in tight quarters
- Durable die cast epoxy-enameled body

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION				
MCCUT-WW	66979340	BX MC Rotary Cut	tter w/Lever			
RS-101A-WW	66978140	RS-101A-WW Su	RS-101A-WW Super Roto-Split® Cutter			
RS-101AC-WW	66978440	RS-101AC-WW A	RS-101AC-WW Automatic Roto-Split® Cutter			
	WEIGHT	MIN	MAX	FLEX	AWG SOL OR	
		OPENING	OPENING	(TRADE SIZE)	MC RANGE	
MCCUT-WW	1.2 lbs	0.375"	0.75"	3/8"	14/2 to 8/4	
MCCUT-WW RS-101A-WW	1.2 lbs 1.2 lbs					

ROTO-FLEX® CUTTERS





Easily handles all common MC, BX, and flex cables. Securely holds cable in place and releases quickly.

- Quickly splits the armored jacket on 14-2 to 10-4 armored cables and 3/8" flexible conduit with a few turns of the handle
- Adjustable cutting depth for standard and reduced diameter BX/MC cables
- Stores up to 6 extra blades in handle knob
- · Durable die cast epoxy enameled construction

MODEL	# STOCK #	DESCRIPTIO	N			
RF-120A-W	W 66978740	RF-120A-WW 1/2	RF-120A-WW 1/2" – 3/4" Roto-Flex™ Cutter			
RF-170-W	N 66979040	RF-170-WW Gian	RF-170-WW Giant Roto-Flex™ Cutter			
	WEIGHT	MIN OPENING	MAX OPENING		AWG SOL OR MC RANGE	
RF-120A-W	W 1.25 lbs	0.75"	1.13"	1/2" - 3/4"	4/2 to 2/4	
111 120A W	W 1.25 IDS	0.75	1.13	1/2 - 3/4	7/2 10 2/4	

ROTO-SPLIT® AND ROTO-FLEX™ STANDARD BLADE





The Southwire B-102 Standard Blade is the replacement blade for all Roto-Split® and Roto-Flex™ models. This is an essential when installing MC cable. The B-102 is the perfect backup blade for your Roto-Split® and Roto-Flex™ cutters. Great for the electrician. Proudly made in the USA.

- · Sold in packs of 2
- · Blade used to cut steel casing
- Replacement blade for all Roto-Split[®] and Roto-Flex[™] models

MODEL #	STOCK #	DESCRIPTION	ON			
B-102	59814401	Replacement Blade for RS-101A-WW, RS-101AC-WW, RF-120A-WW				
MCBLADE	58282340	Replacement Blade for MCCUT-WW				
	WEIGHT	HEIGHT WIDTH DEPTH				
B-102	1.26"	1.26"	0.025"	.006 lbs		
MCBLADE	1.26"	1.26"	0.025"	.006 lbs		

TERMINATION

OFFSET TEETH BLADE



The Southwire B-107 is a heavy-duty, universal blade that can be used on all Roto-Flex™ tools. It cuts through aluminum armor clad with minimal effort. It can also cut through steel armor on 1/2" and larger trade size flex. Need a backup blade? This is a great replacement blade for aluminum casing. Perfect for the electrician. Proudly made in the USA.

- · Offset teeth to prevent clogging
- · Used to cut aluminum casing
- For use with all Roto-Flex[™] models
- Not for use with the RS-101AC-WW

MODEL #	STOCK #	DESCRIPTI	ON	
B-107	59814901	Replacement Bl	ade for RF-170-WW	
	WEIGHT	HEIGHT	WIDTH	DEPTH
B-107	1.26"	1.26"	0.025"	.006 lbs

STRIP-ALL® STRIPPERS

SA-200SK





The SA-200SK is perfect for stripping flat cable. It is a very helpful tool that makes stripping cable faster. It can straight cut jacketed cables up to 5/8" and ring cut cables up to 1/2". Great for the electrician. The best part? This tool is proudly made in the USA.

- · Extremely accurate
- Calibrated micrometer dial for precise depth of cut adjustment
- · Handy, built-in wire stripper on all models
- Equipped with an extra-sharp, surgical type blade cartridge which easily slices through cable jackets

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N		
SA-200SK	59817340	SA-200SK Strip-A	All® Stripper with Kr	nife	
SA-200S	59817201	SA-200S Strip-All	® Stripper without	Knife	
SA-200L	59817101	SA-200L Large St	trip-All® Stripper		
	WEIGHT	MIN OPENING	MAX OPENING	FLEX (TRADE SIZE)	AWG SOL OR MC RANGE
SA-200SK	.25 lbs	1/4"	5/8"	5-1/4"	4/0'
SA-200S	.25 lbs	1/4"	5/8"	5-1/4"	4/0'
SA-200L	.25 lbs	3/8"	7/8"	5-1/4"	14-2 to 6-3

VEE-TWIN™ STRIPPER



The Vee-TwinTM Stripper makes it easy to strip difficult rubber cable as well as plastic jacket cables with its 90° rotating blade, which can be used for ring-cutting and straight-cutting. The VT-270 is perfect for precise cuts in thick cable. It is also great for stripping bulk amounts of cable. Proudly made in the USA.

- Depth of cut setting is extremely accurate to .001" due to a precision micrometer
- Useful for cable sizes ranging from 5/16" to 2-1/8" 0.D.
- Used on entrance cable, plenum, multi-pair, and tray cables
- Strips plastic jackets from liquid-tight, flex, or MC
- Blade can be easily replaced
- · Body is nickel plated steel for increased durability

MODEL #	STOCK #	DESCRIPTIO	N		
VT-270	59817701	VT-270 Vee-Twin™ Stripper			
	WEIGHT	MIN OPENING	MAX OPENING	MAX CUT DEPTH	AWG SOL OR MC RANGE
VT-270	0.7 lbs	5/16"	2-1/8"	1/4"	14-2 to 4/0

EDGEFORCE™ & STAINLESS STEEL KNIVES



















Our knives feature a durable 8CR13MOV stainless steel blade with a black oxide finish and liner lock that keeps the blade secure. Our compact pocket knife is perfect for everyday carry and our hawk bill knife is the perfect pocket knife for pull cuts and splicing.

- Corrosion resistant
- · Liner lock keeps blade secure
- · Dual thumb studs for right or left hand opening
- · Comfort grip for maximum hold and comfort
- Edgeforce[™] D2 steel

MODEL #	STOCK #	DESCRIPTIO	N			
UTILQO	65029040	Folding Utility Kni	fe			
CDPK	65029340	Compact Pocket I	Knife			
HBKN	65029440	Hawkbill Folding	Knife			
HBKND2	65029640	EDGEFORCE™ Ha	awk Bill Knife			
UTILAR	65029240	Auto Retracting U	tility Knife			
TBKND2-CAMO	65029840	EDGEFORCE™ Ta	anto Knife			
CSPKD2	65029740	EDGEFORCE™ SI	EDGEFORCE™ Sheepsfoot Knife			
DPKD2	65029540	EDGEFORCE™ D	rop Point Knife			
	HEIGHT	WIDTH	DEPTH	WEIGHT		
UTILQ0	6.85"	1.61"	0.45"	0.30 lbs		
CDPK	6.74"	1.05"	0.45"	0.10 lbs		
HBKN	7.24"	1.57"	0.45"	0.25 lbs		
HBKND2	7.24"	1.57"	0.45"	0.25 lbs		
UTILAR	6.01"	0.45"	0.45"	0.30 lbs		
TBKND2-CAMO	8.18"	1.5"	0.45"	0.25 lbs		
CSPKD2	7.28"	1.05"	0.79"	0.23 lbs		
DPKD2	7.09"	1.05"	0.79"	0.33 lbs		





KEYSTONE TIP SCREWDRIVERS



Our USA keystone tip screwdrivers are constructed to handle the toughest jobs with ease. The cushion grip handles allow for maximum torque and comfort. These screwdrivers come with high quality, precision machined tips for an exact fit.

- 22% Larger cushion grip handle provides ultimate comfort and maximum torque
- Corrosion resistant shank
- · Tether hole for tether or lanyard attachment
- No-hassle lifetime warranty

MODEL #	STOCK #	DESCRIPTI	ON			
SD1/4K4US	65139240	1/4" Keystone	1/4" Keystone Tip Screwdriver			
SD5/16K6US	65139340	5/16" Keystone	5/16" Keystone Tip Screwdriver			
	HEIGHT	WIDTH	DEPTH		WEIGHT	
SD1/4K4US	9"	1.35"	1.1"		0.30 lbs	
SD5/16K6US	9"	1.35"	1.1"	1.1" 0.45 lbs		
	SHAN	IK TYPE	SHANK L	ENGTH	TIP TYPE	
SD1/4K4US	R	ound	4"		Keystone	
SD5/16K6US	R	ound	6"		Keystone	







CABINET TIP SCREWDRIVERS





Our USA cabinet tip screwdrivers are constructed to handle the toughest jobs with ease. The cushion grip handles allow for maximum torque and comfort. These screwdrivers come with high quality, precision machined tips for an exact fit.

- 22% Larger cushion grip handle provides ultimate comfort and maximum torque
- Corrosion resistant shank
- Tether hole for tether or lanyard attachment
- · No-hassle lifetime warranty















MODEL #	STOCK #	DESCRIPTION	DN			
SD1/4C4US	65138740	1/4" Cabinet Tip	Screwdriver			
SD1/4C6US	65138840	1/4" Cabinet Tip	Screwdriver			
SD3/16C4US	65138940	3/16" Cabinet T	ip Screwdriver			
SD3/16C6US	65139040	3/16" Cabinet T	ip Screwdriver			
SD3/16C8US	65139140	3/16" Cabinet T	ip Screwdriver			
	HEIGHT	WIDTH	DEPTH		WEIGHT	
SD1/4C4US	8.5"	1.35"	1.35" 1.35"		0.30 lbs	
SD1/4C6US	10.5"	1.35"	1.35"		0.35 lbs	
SD3/16C4US	8.5"	1.28"	1.35"		0.20 lbs	
SD3/16C6US	10.5"	1.28"	1.35"		0.20 lbs	
SD3/16C8US	12.5"	1.28"	1.35"		0.20 lbs	
	SHAN	IK TYPE	SHANK L	ENGTH	TIP TYPE	
SD1/4C4US	R	ound	4"		Cabinet	
SD1/4C6US	R	ound	6"		Cabinet	
SD3/16C4US	R	ound	4"		Cabinet	
SD3/16C6US	R	ound	6"		Cabinet	
SD3/16C8US	R	ound	8"		Cabinet	







PHILLIPS TIP SCREWDRIVERS




Our USA Phillip tip screwdrivers are constructed to handle the toughest jobs with ease. The cushion grip handles allow for maximum torque and comfort. These screwdrivers come with high quality, precision machined tips for an exact fit.



- 22% Larger cushion grip handle provides ultimate comfort and maximum torque
- · Corrosion resistant shank
- · Tether hole for tether or lanyard attachment
- No-hassle lifetime warranty





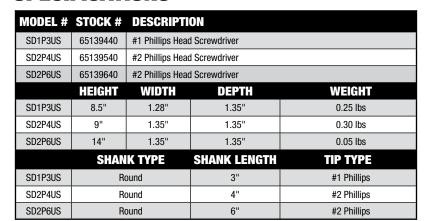









SQUARE TIP SCREWDRIVER





The USA #2 square tip driver has a 22% larger cushion grip handle that provides ultimate comfort and maximum torque *as compared to previous generations. The corrosion resistant shank ensures durability to withstand rust, allowing for a longer life. This screwdriver comes with a high quality, precision machined tip for an exact fit. A tether hole is provided for tether/lanyard attachment for added convenience. Patent pending.

- 22% Larger cushion grip handle provides ultimate comfort and maximum torque
- Corrosion resistant shank
- · Tether hole for tether or lanyard attachment
- No-hassle lifetime warranty

MODEL #	STOCK #	DESCRIPTI	ON		
SDQ2P4US	58281640	#2 Square Tip Screwdriver			
	HEIGHT	WIDTH	DEPTH		WEIGHT
SDQ2P4US	8.5"	1.35"	1.35"		0.35 lbs
	SHANK TYPE		SHANK LENGTH		TIP TYPE
SDQ2P4US	Square		4"		Square









8-PIECE CUSHION GRIP SCREWDRIVER SET



All-purpose assortment of frequently used screwdrivers.

- · Comfortable cushion grip handle offers slip resistance and greater torque
- · Precision tips for an exact fit
- Handles marked for easy identification
- Includes 8 pieces: 3/16" x 4", 3/16" x 6" and 1/4" x 4" slotted tip, 1/4" x 4" and 5/16" x 6" keystone tip, #1 x 3", #2 x 4", Phillips tip, and #2 x 4" square tipped screwdrivers

3-PIECE INSULATED SCREWDRIVER SET




This screwdriver set comes with 3 insulated drivers that are tested to the ASTM F1505 international standard and provide 1000 volt insulated protection.

- · 1000 volt insulated protection
- Tested to ASTM F1505 international standard
- Durable molded insulation offers visual wear indication
- Includes #2 Phillips x 4" shank, 1/4" slotted x 4" shank, and 3/16" slotted x 6" shank

I	MODEL #	STOCK #	DESCRIPTION	HEIGHT	WIDTH	DEPTH	WEIGHT	INCLUDES
	SDSET8US	65139940	8-Piece Cushion Grip Screwdriver Set	8.5"	1.25"	1.25"	0.13 lbs	SD3/16C4, SD3/16C6, SD1/4K4HD, SD1/4C4, SD5/16K6HD, SD1P3, SD2P4HD, SDQ2P4
	SDISET3	65172040	3 Piece Insulated Screwdriver Set	9"	1.35"	1.35"	0.13 lbs	#2 Phillips x 4" shank, 1/4" Slotted x 4" shank, 3/16" Slotted x 6" shank







CONDUIT FITTING REAMING SCREWDRIVER



Removable conduit reaming screwdriver deburs thin wall conduit with speed and ease.

- Reams and smooths 1/2", 3/4", and 1" thin-wall conduit ends to protect wire and permit correct installation of fittings
- · Reams inside and outside of conduit simultaneously
- Cushion grip handles for comfort and use
- · Detachable head can also be used in a drill

MODEL #	STOCK #	DESCRIPTIO	N			
SDCFR	58283740	Conduit Fitting Reaming Screwdriver				
	HEIGHT	WIDTH	DEPTH	WEIGHT		
SDCFR	7.5"	1.25"	1.25"	0.59 lbs		

MULTI-BIT/ADJUSTABLE/ROTARY SCREWDRIVERS













SD4N1C

- Rotary action screwdrivers facilitate fast and easy screw installation and removal.
- Magnetic bit holder
- · Chrome plated finish for corrosion resistance
- Heavy Duty steel shanks with bolsters for wrench assisted turning

SD4N1P

- Precision screwdrivers make work in small spaces easier.
- Includes: 1/8" and 3/32" slotted, #0 and #00 phillips
- Spinning cap for controlled one handed use
- · Patent pending cushion grip handle

SD6N1P

- Comes with a precision bit allowing easier work in small spaces.
- #0 Phillips bit for precision work
- Chrome plated finish for corrosion resistance
- Comfort grip handle provides extra comfort and maximum torquee

- Convenient multi-tool screwdriver with nine tools in one.
- Comfortable cushioned grip allows firm grip and greater torque.
- Precision-machined tips reduce slipping
- Integral flanges provide a solid, twist-resistant blade anchor

SD2N1AL

- · Allows for extending and shortening of the shank for work in different places
- Adjustable from 4" to 8"
- · Pull collar down to extend shank and pull up to shorten
- Zinc plated finish for corrosion resistance

MODEL #	STOCK #	DESCRIPTION						
SD4N1C	65028540	4-in-1 Magnetic Rot	ary Driver					
SD4N1P	65117240	4-in-1 Magnetic Scr	ewdriver w/ Precision	on Bit				
SD6N1P	65028840	6-in-1 Screwdriver v	w/ Precision Bit					
SD9N1	58285640	9-in-1 Multi Tool Sci	rewdriver					
SD2N1AL	65028640	2-in-1 Adjustable Le	2-in-1 Adjustable Length Screwdriver					
	HEIGHT	WIDTH	WIDTH DEPTH WEIGHT					
SD4N1C	9.30"	1.28"	1.38"	0.75 lbs				
SD4N1P	7.99"	0.67"	0.67" 0.39" 0.16 lbs					
SD6N1P	11.06"	1.28"	1.30"	0.60 lbs				
SD9N1	11.02"	1.25"	1.57"	0.55 lbs				
SD2N1AL	11.02"	1.2"	1.57"	0.75 lbs				
			TIP TYPE					
SD4N1C	#1 & #2 Phi	llips, 3/16" & 1/4" Slo	otted					
SD4N1P	1/8" and 3/	1/8" and 3/32" slotted, #0 and #00 phillips						
SD6N1P	5/16" & 1/4" nut drivers, #1 & #0 Phillips, 1/4" & 3/16" Slotted							
SD9N1	1/4", 3/8",	& 5/16" Hex, #1 & #2	Phillips, 1/4" & 3/1	6" Slotted, #1 & #2 Square				
SD2N1AL	#2 Phillips,	1/4" Slotted						

12-IN-1 MULTI-BIT SCREWDRIVER



The 12-in-1 multi-bit screwdriver has precision-machined, quick change bits.

- Precision-machined, quick change bits for driving hex, Phillips, slotted, and square head screws
- Handles 3/16", 1/4", 5/16" slotted; #1, #2, #3 Phillips; #1, #2, square recessed; and 1/4", 5/16", 3/8", 1/2" hex drive
- · Cushion grip handle provides extra comfort and maximum torque
- Premium chrome-plated shaft is durable as well as rust and corrosion resistant
- Meets ANSI/ASME specifications

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPT	TION		
SD12N1	59723940	12-in-1 Multi-Bit Screwdriver			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
SD12N1	11.75"	3.25"	1.38"	0.85 lbs	

9-IN-1 RATCHETING SCREWDRIVER



The 9-in-1 ratcheting multi-tool screwdriver allows for quick driving of screws and nuts.

- · Precision-machined, quick change bits for driving hex, Phillips, slotted, and square head screws
- Handles 1/4", 3/8", 5/16" hex; #1 and #2 Phillips; 1/2" and 3/16" slotted; #1 and #2 square
- Cushion grip handle provides extra comfort and maximum torque
- Premium chrome-plated shaft is durable as well as rust and corrosion
- Meets ANSI/ASME specifications

MODEL #	STOCK #	DESCRIPT	TION			
SDR9N1	59724040	9-in-1 Ratcheting Screwdriver				
	HEIGHT	WIDTH	DEPTH	WEIGHT		
SDR9N1	11.75"	3.25"	1.50"	0.6 lbs		

6-IN-1 STUBBY MULIT-BIT SCREWDRIVER



The 6-in-1 multi-bit screwdriver features precision-machined, quick change bits.

- · Includes 2 double sided screwdriver bits and 1 double sided nut driver
- Sizes include 5/16" & 1/2" hex, #1 & #2 Phillips, & 3/16" &1/4" slotted tips
- · Cushion grip handles for added comfort and improved torque

MODEL #	STOCK #	DESCRIPT	TION				
SDS6N1	58739740	6-in-1 Stubby	6-in-1 Stubby Multi-Bit Screwdriver				
	HEIGHT	WIDTH	DEPTH	WEIGHT			
SDS6N1	3.50"	1.25"	1.25"	.20 lbs			

NUT DRIVERS



ND6N1HD

NDS5N1


This line of USA nut drivers includes a 7 piece set. The nut drivers have 22% larger cushion grip handles that provides ultimate comfort and maximum torque *as compared to previous generations. The corrosion resistant shank ensures durability to withstand damage, allowing for a longer life. A tether hole is provided for tether/lanyard attachment for added convenience. Patent pending.

- · 22% Larger cushion grip handle provides ultimate comfort and maximum torque
- Corrosion resistant shank
- · Tether hole for tether or lanyard attachment
- No-hassle lifetime warranty

CDECIEICATIONS

SPECIFI	I UAI IU	JN2				
MODEL #	STOCK #	DESCRIPTI	ON			
ND7/16-3US	65138340	7/16" Nut Drive	r			
ND1/2-3US	65137840	1/2" Nut Driver				
ND1/4-3US	65137940	1/4" Nut Driver				
ND3/8-3US	65138140	3/8" Nut Driver				
ND11/32-3US	65138540	11/32" Nut Driv	er			
ND3/16-3US	65138440	3/16" Nut Drive	r			
ND5/16-3US	65138240	5/16" Nut Drive	r			
ND6N1HD	65028740	6-in-1 Heavy Dı				
NDS5N1	65116540	5-in-1 Stubby N	lut Driver			
NDSET7US	65138640	7 Piece Nut Driver Set				
	HEIGHT	WIDTH	DEPTH	WEIGHT	SHANK LENGTH	
ND7/16-3US	8"	1.35"	1.2"	0.35 lbs	3"	
ND1/2-3US	8"	1.35"	1.2"	0.40 lbs	3"	
ND1/4-3US	8"	1.28"	1.2"	0.25 lbs	3"	
ND3/8-3US	8"	1.28"	1.2"	0.30 lbs	3"	
ND11/32-3US	8"	1.28"	1.2"	0.30 lbs	3"	
ND3/16-3US	8"	1.28"	1.2"	0.25 lbs	3"	
ND5/16-3US	8"	1.28"	1.2"	0.30 lbs	3"	
ND6N1HD	11.42"	1.25"	1.77"	1.00 lbs	-	
NDS5N1	5.91"	1.77"	1.18"	0.28 lbs	-	
NDSET7US	6"	1.40"	1.18"	2.00 lbs	-	
	SHAN	IK TYPE	SHANK L	ENGTH	TIP TYPE	
ND7/16-3US	Ro	ound	3"		7/16"	
ND1/2-3US	Ro	ound	3"		1/2"	
ND1/4-3US	Ro	ound	3"		1/4"	
ND3/8-3US	Ro	ound	3"		3/8"	
ND11/32-3US	Ro	ound	3"	ı	11/32"	
1100/40 0110						

	SHANK TYPE	SHANK LENGTH	TIP TYPE
ND7/16-3US	Round	3"	7/16"
ND1/2-3US	Round	3"	1/2"
ND1/4-3US	Round	3"	1/4"
ND3/8-3US	Round	3"	3/8"
ND11/32-3US	Round	3"	11/32"
ND3/16-3US	Round	3"	3/16"
ND5/16-3US	Round	3"	5/16"
ND6N1HD	-	-	3/16",1/4",5/16", 3/8",7/16",9/16"
NDS5N1	-	-	3/16",1/4", 5/16",3/8",1/2"
NDSET7US	-	-	1/2", 1/4", 3/8", 5/16", 7/16", 3/16", and 11/32









Southwire

T-HANDLE HEX KEYS



Designed to efficiently tighten and loosen hex screws.

- . T-handle design allows for greater torque application
- · Hex key blade long and short for flexible use
- · Forged heavy duty steel blade for durable usage
- · Over molded grip for comfortable feel

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPT	TION			
THEX6-1/2	58287840	1/2" T-Handle Hex Key w/ 8" Shank				
	HEIGHT	WIDTH	DEPTH	WEIGHT	SET LENGTH	
THEX6-1/2	9.75"	4.75"	1"	0.91 lbs	8"	

FOLDING HEX KEY SETS





Convenient and reliable, these folding hex key sets will help you get the job done quickly and easily.

- Precision made hex keys reduce slipping and stripping
- · Set easily stores in metal case to reduce lost keys and damage
- · Strong durable body doubles as a handle

MODEL #	STOCK #	DESCRIPTION					
HEX-8	58287640	8-Piece Foldir	ng Hex Key Set				
HEX-5	58287540	5-Piece Foldir	5-Piece Folding Hex Key Set				
	HEIGHT	WIDTH	DEPTH	WEIGHT	SET LENGTH		
HEX-5	5.25"	1.5"	0.75"	0.68 lbs	3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", & 1/4"		
HEX-8	5.25"	1.5"	0.75"	0.89 lbs	3/16", 7/32", 1/4", 5/16". & 3/8"		

CONDUIT BENDING LEVEL



High visibility vials are easy to read and set for measurements at 0°, 30°, 45°, and 90°.

- · Set screw secures level to conduit
- · Four powerful magnets for hands free operation
- Easy-to-read, high impact, acrylic bubble vials
- · V-grooved edge helps hold the level in place on pipe or conduit

MODEL #	STOCK #	CK # DESCRIPTION						
MCBLEVEL	58281640	6" Conduit Bending Level						
	HEIGHT	WIDTH	DEPTH	WEIGHT	SET INCLUDES			
MCBLEVEL	6.31"	1.88"	0.63"	0.31 lbs	Magnets, thumb screw for attaching to conduit			

ELECTRICIAN'S SHOULDER POUCH



Convenient shoulder bag provides a lightweight, durable tool carrier that can be hand-carried, slung over your shoulder, or attached to a belt. Features 16 storage pockets.

- Multiple carrying options: shoulder strap, padded handle, belt loop tunnel
- · Constructed from 2400D ballistic weave for durability
- 16 tool storage pockets

MODEL # STOCK #		DESCRIPTION				
BAGESP	58738740	Electrician's S	houlder Pouch			
	HEIGHT	WIDTH	DEPTH	INTERNAL CAPACITY		
BAGESP	12"	8.5"	6.5"	247 Cubic Inches/4 Liters		

TOOL BACKPACK



Our tool backpack allows you to comfortably carry your tools on your back or by hand. Easy opening zippers allow access to the numerous tool storage compartments. Enclosed pouches are located on both external and internal surfaces to provide additional tool storage security.

- · Constructed from 2400D ballistic weave for durability
- 58 storage pockets, zippered pouches, and tool loops
- · Non-tipping rubber base is wear and water resistant
- · Fully molded base allows bag to stand freely

MODEL #	STOCK #	DESCRIPT	ION	
PROBAGBP	67599040	Tool Backpack	<	
	HEIGHT	WIDTH	DEPTH	INTERNAL CAPACITY
PROBAGBP	18.7"	13.78"	7.87"	1, 235 Cubic Inches

5-POCKET LEATHER TOOL POUCH



The 5-pocket leather tool pouch with electrical tape chain is designed for easy storage and tool access.

- · Saddle leather resistant to fade and stain
- · Washer rivets for extra strength
- Fits belts up to 3" wide

MODEL #	STOCK #	DESCRIP1	TION	
POUCH4	58283140	5 Pocket Tool	Pouch	
	HEIGHT	WIDTH	DEPTH	INTERNAL CAPACITY
POUCH4	9.25"	7"	3"	Leather

ELECTRICIAN'S WORK GLOVES



High dexterity electrician's gloves with anti-slip fingertips.

- · Anti-slip finger tips for secure holding of wire and tools
- · Padded palm for protection and secure grip
- · Wrapped index finger for durability
- Breathable spandex back for comfortable fit and feel
- · Touchscreen compatible index finger and thumb

MODEL #	STOCK #	DESCRIPT	TION		
GL0VE1L	58739040	Electrician's V	Vork Gloves - Large		
	PRIMARY MATERIAL SECONDARY MATERIAL				
GLOVE1L	Breathabl	e Spandex	Synthetic Leather		



CANVAS ZIPPER BAG

BAG12




Our canvas zipper bag is a very convenient storage place for pliers, wrenches, and other tools that you use daily.

BAG12

- . Durable, heavy-duty cotton canvas bag
- · Sturdy plastic resin zipper

BAG4P

- · 4-Pack of durable polyester bags with sturdy resin zipper
- Perfect for storing Pliers, screwdrivers, staples or electrical connectors.





4-PIECE ELECTRICIAN'S TOOL KIT

EKIT-4



Complete with 10-18 AWG wire stripper, 9-in-1 multi-bit screwdriver, high leverage side cutting pliers, and nylon carrying pouch.

10-18 AWG WIRE STRIPPER - MODEL # S1018STR

- Strips and cuts 10-18 AWG solid and 12-20 AWG stranded wire
- · Stainless steel construction is durable and corrosion resistant
- · Double-dipped grip provides comfortable fit
- Specially designed stainless steel cutting blades provide fast and clean wire stripping
- · Serrated nose grasps the cable for easy twisting and pulling
- · Spring loaded for self-opening action
- · Not intended for cutting bolts or steel cable

HIGH LEVERAGE SIDE CUTTING PLIERS - MODEL # SCP9

- Induction hardened cutting blades ensure efficient and lasting cutting surfaces for hard and soft wire
- · File teeth on jaws help remove burrs in conduit
- · Cuts ACSR, screws, nails, and most hardened wire
- Curved handle and ergonomic molded grip for comfortable use
- Drop forged CRV steel for durability

9-IN-1 MULTI-BIT SCREWDRIVER - MODEL # SD9N1

- Includes 6 bits and 3 nut drivers for multi-purpose use
- Cushion grip handle for comfortable use and maximum torque application



MODEL #	STOCK #	DESCRIPT	TION		
EKIT-4	59158740	4-Piece Electr	rician's Tool Kit		
	HEIGHT	WIDTH	DEPTH	WEIGHT	INCLUDES
EKIT-4	9.75"	4.25"	2.25"	0.35 lbs	S1018STR, SCP9, and SD9N1

CABLE SPLICERS KIT



Cable splicers kit is ideal for prepping category cable installation.

- · Lock holds blades closed for storage
- · Serrated lower blades grip wire for non-slip cutting action
- Includes marking pen
- · Includes leather carrying pouch
- Includes boot knife for sheathing and removing cable jackets

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPT		
CSK5	59724240	Cable Splicers	Kit	
	HEIGHT	WIDTH	DEPTH	WEIGHT
CSK5	8.25"	3.8"	2.2"	0.8 lb.







BEKIT-3 BASIC ELECTRICIAN'S KIT




The perfect start to your electrical work tool box. These three tools are exactly what you need to get started on any simple electrical task.

- The S1018STR stainless steel wire stripper is rust resistant
- The SD9N1 Multi-Bit Screwdriver includes #1 & #2 Phillips tips, 1/4", 5/16", & 3/8" hex drivers, 3/16" & 1/4" slotted tips, and #1 & #2 square tips
- The 40116N NCV has a detection range of 100-600V AC

MODEL #	STOCK #	DESCRIPT	TION	
BEKIT-3	63136840	Basic Electric	ian's Kit	
	HEIGHT	WIDTH	DEPTH	WEIGHT
BEKIT-3	10.25"	7.88"	0.75"	2 lbs

YOCE DATA VIDEO

Southwire offers a full line of VDV tools including cable cutters, strippers, crimpers and punchdown tools, as well as cable tracers and testers. Our goal is to provide professional tools that exceed customers' expectations for quality, performance and features — tools that make a difference on the real-world jobsite.

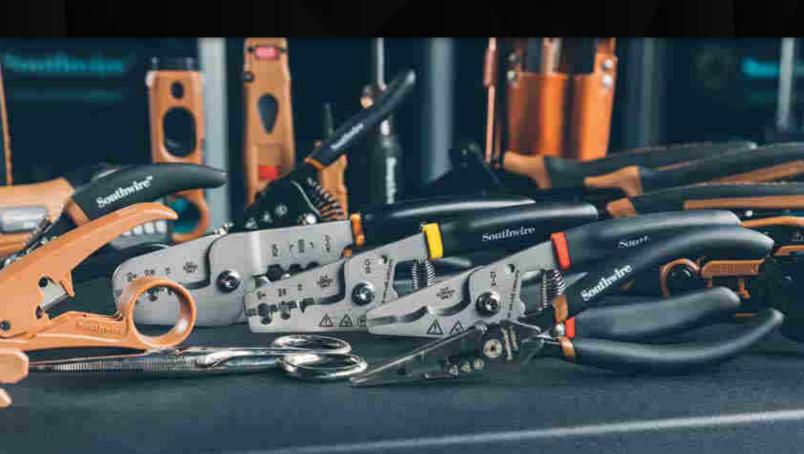

PROFESSIONAL DATACOMM SNIPS



These snips provide very precise control and offer a patented design with unique spring-loaded action.

- Ergonomic, spring-loaded design for precise control
- · Lock holds snips closed for storage
- Double-dipped, textured grip
- Strips 19 AWG and 23 AWG
- · Serrated blade grips wire as it cuts



MODEL # STOCK #		DESCRIPTION
ESP-1	58743740	Professional DataComm Snips

ELECTRICIAN'S SCISSORS



Unlike regular scissors or shears, the serrated blades of this powerful scissor keeps wire from slipping out of the jaws. Cutting through hardware cloth, cable, wire netting, and other difficult-to-cut materials becomes as easy task.

- Strips 19 AWG & 23 AWG
- Strong, tempered steel
- · Nickel-plated finish resists corrosion
- Scraper and file on outside of both blades



MODEL #	STOCK #	DESCRIPTION
ESS-1	58743840	Electrican's Scissors

COAX CCS CUTTER



Many coax cables today have a copper clad steel (CCS) center conductor. This specially designed cutter is made to reliably cut CCS coax that might damage standard cable cutters.

- · Reliably cuts copper-clad steel coax without blade damage
- V-notch blade doesn't deform cable
- Forged steel
- Double-dipped textured grip



SPECIFICATIONS


MODEL #	STOCK #	DESCRIPTION
CCSX-C1	58743340	CCSX-C1 Coax CCS Cutter

ROUND CABLE CUTTER



The stainless steel X-C1 has two cable cutting profiles: a long nose for cutting in confined spaces and a cable tie cutting tip. This is perfect for coax and twisted pair cabling.

- · Curved blade profile for clean cuts
- · Elongated nose to reach and cut in tight places
- Stainless steel for corrosion resistance
- Double-dipped textured grip
- · Cutting areas for small and large round cable



MODEL #	STOCK #	DESCRIPTION
X-C1	58746740	X-C1 Round Cable Cutter

KEY STRIP TOOL FOR TWISTED PAIR

SK-T1



The key strip tool for twisted pair quickly strips outer cable jackets from CAT 3, 5, 5e and 6 data cable.

- · Quickly removes outer cable jacket
- Three positions for different size cables
- Cost effective



SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
SK-T1	58746140	SK-T1 Key Strip Tool for Twisted Pair

COAX TRIGGER STRIP TOOL

ST-C1



The rotary-style coax stripper performs a fast and precise two-level strip in one easy step.

- Standard two-level strip exposes 1/4" of center conductor and 1/4" of shield braid
- Innovative "trigger" design improves control and fits comfortably in hand
- Use with RG59, RG6 and RG6 quad shield coax




MODEL #	STOCK #	DESCRIPTION
ST-C1	58746240	Coax Trigger Strip Tool

AUTOMATIC WIRE STRIPPER FOR COAX



The SA-C1 automatic wire stripper for coax allows for quick, two-step stripping of RG6 and RG6Q cable.

- Traditional automatic design preferred by many installers
- 2-level strip: Center conductor and outer jacket



SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
SA-C1	58745940	Automatic Wire Stripper for Coax

COAX CUTTER/STRIPPER



The XS-C1 coax cutter/stripper cuts and strips coax cable and features a cable tie cutting tip.

- · Cuts and strips RG59, RG6, and RG6Q quad shield coax
- Stainless steel for corrosion resistance
- · Textured double dip handles for better grip and comfort
- Tip is designed to cleanly cut cable ties



MODEL #	STOCK #	DESCRIPTION
XS-C1	58746840	Coax Cutter/Stripper

VDV | PREP TOOL

VDV HAND TOOLS

COAX PREP TOOL



The time-saving coax prep tool is a 3-in-1 tool for loosening/tightening cable TV "F" connectors from jacks. It also flares the cable jacket and holds the connector during assembly.

- Easily loosens stubborn connectors
- · Flares coax jacket for easy connector insertion
- Holds cable TV "F" connector during cable insertion
- Double-molded grip for long-lasting comfort



MODEL #	STOCK #	DESCRIPTION
CPT-CF1	58743440	Coax Prep Tool

PROFESSIONAL IMPACT PUNCHDOWN TOOL

PDTP-K1



Includes both 110 and 66 style blades Easy to pull out wire hook and spudger tools

The professional impact punchdown tool includes 110 & 66 twist-to-lock blades and features unique pull out accessory tools in a comfortable, durable tool body.

- Terminates twisted pair category cable into wall jacks and patch panels for phone and data communications
- Includes both 110 and 66-style, long life, metal injection molded blades
- · Comfortable double-molded tool body
- Wire hook and spudger accessory tools pull out one-handed with easy-to-use thumb studs
- · Covered blade storage





BLADES AVAILABLE SEPARATELY

- B1 Reversible 66 Punch/110 Cut-Only Punchdown Blade
- B2 Reversible 110 Cut/Punch Punchdown Blade
- B3 Reversible 66 Cut/Punch Punchdown Blade

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
PDTP-K1	58745540	Professional Impact Punchdown Tool

COMFORT GRIP 110-STYLE PUNCHDOWN TOOL

PDTC-1



The comfort grip 110-style punchdown tool easily terminates 110-style blocks on patch panels and wall jacks.

- · Punch down 110-style jacks or patch panels
- Soft rubber comfort grip
- 110-style blade terminates cable and trims excess wire




MODEL #	STOCK #	DESCRIPTION
PDTC-1	58745440	Comfort Grip 110-Style Punchdown Tool

RATCHETING PHONE & DATA CRIMP TOOL



The RJCR-T1 ratcheting phone & data crimp tool cuts and strips voice and data cable. It also crimps RJ45 data connectors as well as RJ11/ RJ12 phone modular plugs.

- Ratcheting tool cuts, strips, and crimps phone and data cable
- Comfortable double-molded grips help to orient the tool
- Compatible with standard RJ45, RJ11/RJ12, and RJ22 modular plugs
- Locks closed for easy storage



MODEL #	STOCK #	DESCRIPTION	
RJCR-T1	58745840	Ratcheting Phone & Data Crimp Tool	

RATCHET CRIMP TOOL - COAX CABLE TV "F" HEX CONNECTORS

RCT-D1



The compound leverage design delivers high crimp force with low hand force, and the near-parallel jaw action delivers precision crimps. The RCT-D1 is where power meets precision.

- · Compound leverage design provides powerful crimping with low hand force
- Near-parallel travel crimping jaw for precise crimps
- Precision ratchet with release
- · Convenient handle lock for easy storage
- Die set available separately:
 - D1 Die Set Cable TV F Coax

MODEL # STOCK #		DESCRIPTION
RCT-D1	58745640	RCT-C1 Ratchet Crimp Tool – Coax


NETWORK TOOL KIT

KIT-TP1



This 13-piece network tool kit includes the tools you need to cut, strip, terminate, and install data cabling.

- · Complete 13 piece kit for terminating data cable
- Make custom length patch cables
- . Includes tools to cut, strip, and terminate data cabling
- Kit includes:
 - Compact 3-in-1 Cut/Strip/Crimp Tool
 - Comfort Grip Punchdown Tool
 - Reversible Screwdriver
 - 10 RJ45 Connectors
 - · Rugged Tool Case



SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
KIT-TP1	58744140	Network Tool Kit

CRIMPING LONG NOSE PLIERS – UR/UY/UG



Long nose pliers for crimping IDC (insulation displacement) UR, UY, and UG type connectors.

- · Crimps UR/UY/UG connectors
- Strips 22-24 AWG wire
- · Induction hardened cutting blade
- Hot-rivet joint for smooth action and long life



MODEL #	STOCK #	DESCRIPTION
LNP6DC-1	58744240	Crimping Long Nose Pliers – UR/UY/UG


MULTI-CONNECTOR COMPRESSION COAX CRIMP TOOL

CCM-C1



When you need versatility, multi-connector compression coax crimp tool is 3-way adjustable to work with F, BNC, and RCA compression connectors as well as RG59/6/6Q and RG7/11 coax cable.

- 3-way chuck can be positioned for cable TV "F", RCA, and BNC connectors
- Rotatable connector cradle accommodates RG59, RG6Q, RG6 as well as larger RG7 and RG11 cable
- Thumb-wheel for fine-tuning crimping length
- For cable TV, satellite, security, and home theater applications
- · Comfortable double-molded grips are indexed to help orient the tool



MODEL #	STOCK #	DESCRIPTION
CCM-C1	58743240	Multi-Connector Compression Coax Crimp Tool


COMPACT COMPRESSION COAX CRIMP TOOL FOR "F" CONNECTORS

CCF-C1



The CCF-C1 compact compression coax crimp tool securely attaches "F" type connectors to coax cable in one easy step. CCF-C1 features double-molded handles to provide a comfortable grip and powerful crimping force.

- Compatible with RG59, RG6, and RG6Q coaxial cable
- Simple, compact, and powerful
- Double-molded handles for durability and grip



MODEL #	STOCK #	DESCRIPTION
CCF-C1	58743140	Compact Compression Coax Crimp Tool - Cable TV "F"








CABLE TV TOOL KIT

KIT-C1



This 13-piece cable TV tool kit includes all the tools you need to cut, strip, crimp, and install "F" connectors onto coax cable.

- . Complete 13-piece kit for terminating coax
- Make custom length coax patch cables
- All 3 tools included to cut, strip, and crimp coax
- Kit includes:
 - Round Cable Cutter
 - Radial "Trigger" Stripper
 - Compression Crimper for "F" Connectors
 - 10 "F" Connectors for RG6 Coax
 - · Rugged Tool Case



MODEL # STOCK # DESCRIPTIO		DESCRIPTION
KIT-C1	58744040	Cable TV Tool Kit








COAX 3-IN-1 CRIMP TOOL

HCT-C1



The stainless steel Southwire 3-in-1 crimp tool cuts and strips coax as well as crimps Cable TV "F" hex-style connectors.

- · One tool cuts, strips, and crimps coax cable
- Crimps "F" connectors
- Stainless steel for corrosion resistance
- Double-dipped textured grip





Introducing our unique line of fish tapes, featuring a spiral extruded polymer design that reduces the amount of effort required to push or pull the fish tape through EMT and PVC conduit. Unlike fiberglass, the SIM*pull*™ fish tapes are kink resistant and virtually unbreakable, ensuring maximum efficiency*.

*As compared to Southwire steel and fiberglass fish tapes.



SIM*pull*™ NON-CONDUCTIVE TIP FISH TAPE



The SIMpull™ non-conductive fish tape is our best option to safely install new wire in conduit with existing wire. The spiral extruded polymer tape reduces the amount of effort required to push or pull the tape through EMT or PVC conduit.

- Tapered Tip Reduces the changes of snagging on wire & conduit
- Improve Push Bonded 4.5mm and 5.5mm diameter tape works well in conduit up to 3 inches
- Advanced Tape Guide & Housing Improved internal mechanics to greatly increase effeciency of payout & reel-in
- Non-Conductive Allows for safe installation over existing wires
- Durability Certified Drop Rating of 15 feet
- Laser etched foot markings
- Versatile handle positioning












FASTER INSTALL

MODEL #	STOCK #	DESCRIPTION				
FTSP55-125NCT	67015540	SIM <i>pull</i> ™ No	on-Conductive T	ip Fish Tape 5.5mm	125'	
FTSP45-125NCT	63163740	SIM <i>pull</i> ™ No	SIM <i>pull</i> ™ Non-Conductive Tip Fish Tape 4.5mm 125'			
FTSP45-75NCT	63029840	SIM <i>pull</i> ™ Non-Conductive Tip Fish Tape 4.5mm 75'				
	HEIGHT	WIDTH	DEPTH	DIAMETER	WEIGHT	
FTSP55-125NCT	16"	12"	2"	5.5mm	2.5 lbs	
FTSP45-125NCT	16"	12"	2"	4.5mm	2.5 lbs	
FTSP45-75NCT	16"	12"	1.5"	4.5mm	2.0 lbs	







SIM*pull*™ FLEXIBLE METAL LEADER FISH TAPE



The SIMpull™ flexible metal leader tape excels at gliding through conduit with multiple bends. The spiral extruded polymer tape reduces the amount of effort required to push or pull the tape through EMT or **PVC** conduit.

- Swiveling Flexible Leader Easily glides through conduit bends and around existing wire
- Improve Push Bonded 4.5mm or 5.5 mm diameter tape works well in conduit up to 3 inches
- Advanced Tape Guide & Housing Improved internal mechanics to greatly increase effeciency of payout & reel-in
- Durability Certified Drop rated of 15 feet
- · Laser etched foot markings
- Versatile handle positioning









FASTER INSTALL TIME

MODEL #	STOCK #	DESCRIPT	TION			
FTSP55-125FML	67015240	SIM <i>pull</i> ™ Fle	SIMpull™ Flexible Metal Leader Fish Tape 5.5mm 125'			
FTSP45-125FML	59896940	SIM <i>pull</i> ™ Fle	SIM <i>pull</i> ™ Flexible Metal Leader Fish Tape 4.5mm 125'			
FTSP45-75FML	59897040	SIM <i>pull</i> ™ Flexible Metal Leader Fish Tape 4.5mm 75'				
	HEIGHT	WIDTH	DEPTH	DIAMETER	WEIGHT	
FTSP55-125FML	16"	12"	2"	5.5mm	2.5 lbs	
FTSP45-125FML	16"	12"	2"	4.5mm	2.5 lbs	
FTSP45-75FML	16"	12"	1.5"	4.5mm	2.0 lbs	







SIM*pull*™ FISH TAPE TUBE

FTSP45-240FMLT




The SIMpull™ tube is designed for long runs over 125¹. This model has the added benefit of both leader types within the same unit. The spiral extruded polymer tape reduces the amount of effort required to push or pull the tape through EMT or PVC.

- Includes both a 360° swiveling flexible metal leader and a non-conductive glow in the dark leader, one on either end
- Swiveling Flexible Leader Easily glides through conduit bends and around existing wire
- Improve Push Bonded 5.5mm diameter tape works well in conduit up to 3 Inches
- Length Markings Quickly identify the approximate length of a conduit run

MODEL #	STOCK #	DESCRIPT	TION		
FTSP55-240FMLT	67015840	SIM <i>pull</i> ™ Tube Fish Tape with both FML & NCT Tips 5.5mm, 240¹			
FTSP45-240FMLT	63164740	SIM <i>pull</i> ™ Tube Fish Tape with both FML & NCT Tips 4.5mm, 240'			
	HEIGHT	WIDTH	DEPTH	DIAMETER	WEIGHT
FTSP55-240FMLT	24"	24"	4"	5.5mm	4.3 lbs
FTSP45-240FMLT	24"	24"	4"	4.5mm	4.3 lbs







STAINLESS STEEL FISH TAPE




Stainless steel tape incorpates the same benefits of steel but with added life.

- Stainless Steel Highly resistant to rust & corrosion.
 Increasing the product's lifespan.
- Advanced Tape Guide & Housing Improved internal mechanics to greatly increase effeciency of payout & reel-in.
- Durability Certified Drop Rating of 15 Feet
- Laser etched foot markings
- · Versatile handle positioning



MODEL #	STOCK #	DESCRIPT	TION		
FTS1/8-125SS	67014640	125' Stainless Steel Fish Tape 1/8"			
FTS1/8-240SS	67014940	240' Stainless Steel Fish Tape 1/8"			
	LENGTH	WIDTH	DEPTH	WEIGHT	TAPE WIDTH
FTS1/8-125SS	17"	12"	2"	4.5 lbs	1/8"
FTS1/8-240SS	17"	12"	2"	7.3 lbs	1/8"







STEEL FISH TAPE



Southwire's steel fish tape reaches easily above ceilings, under carpets, and through walls to install wire. The fish tape is available in multiple lengths.

- Easy Pulls Specially treated steel fish tape for longer life and easier pulling.
- Better Accuracy Laser etched footage markings to help identify length of pull
- Rugged Design High impact, durable case for long lasting performance and use.
- Laser etched foot markings
- Versatile handle positioning



	MODEL #	STOCK #	DESCRIPT	TION			
	FTS1/8-240	58279840	1/8" Fish Tap	1/8" Fish Tape Steel 240'			
ĺ	FTS1/8-125	58279940	1/8" Fish Tape Steel 125'				
ſ	FTS1/8-25	58280240	1/8" Fish Tap	1/8" Fish Tape Steel 25'			
ı		HEIGHT	WIDTH	DEPTH	WEIGHT	TAPE WIDTH	
ſ	FTS1/8-240	17"	12"	2"	7.3 lbs	1/8"	
	FTS1/8-125	17"	12"	2"	4.5 lbs	1/8"	
	FTS1/8-25	8.5"	7"	1"	1.0 lbs	1/8"	

FISH TAPE LEADER



Flexible leader guides steel tapes through conduit and helps reduce the challenge of pulling and pushing.

- Flexible 13" leader easily attaches to 1/8" steel fish tapes
- · Assists in guiding steel fish tapes through conduit turns and bends

SPECIFICATIONS

MODEL #	STOCK #	DESCRIP	TION			
FTFL13	58280640	Fish Tape Leader 13' for Steel Fish Tapes				
	LENGTH	WIDTH	DEPTH	WEIGHT	TAPE WIDTH	EYELET CAPACITY
FTFL13	14.25"	0.38"	0.25"	2 oz.	3/16	5 x 12 AWG Upstripped, 7 x 10 AWG Bare

GLOW-IN-THE-DARK FISH STICK



Make fishing through walls or over ceilings easier with our Glow-in-the-Dark Fish Sticks.

- Luminescent fiberglass rods glow in the dark and recharge with most available light sources
- 3/16" flexible rods resist splintering and cracking
- · Individual sections easily screw together to form single rod
- · Includes bullet nose with eyelet and hook attachments

MODEL #	STOCK #	DESCRIPTION				
FS15	58279340	15' Glow-in-the-Dark Fish Stick (Includes Bullet Nose with Eyelet & Hook Attachments)				
FS12	58279440	12' Glow-in-the-Dark Fish Stick (Includes Bullet Nose with Eyelet & Hook Attachments)				
FS8	58279540	8' Glow-in-the-Dark Fish Stick (Includes Bullet Nose with Eyelet & Hook Attachments)				
	ASSEMBLED LENGTH	WIDTH	DEPTH	WEIGHT	STICK LENGTH	
FS15	180"	0.19"	0.19"	13.3 oz.	3x5' Pieces	
FS12	144"	0.19"	0.19"	13.9 oz.	3x4' Pieces	
FS8	96"	0.19"	0.19"	8 oz.	4x2' Pieces	

CONDUIT BENDERS



Reliably and repeatedly perform common bends, such as stub-ups, offsets, back-to-back, and saddle bends. Available in 1", 3/4", and 1/2" sizes.

- · Durable cast metal heads
- Swaged steel handle permits insertion of conduit to correct overbends
- Raised and highly visible bender markings are cast on both sides of the bender head
- Large serrated step provides greater control and helps prevent slipping when applying force

MODEL #	STOCK #	DESCRIPTION					
MCB1	58281440	1" EMT Condi	1" EMT Conduit Bender with Handle (Ductile Iron Head)				
MCB3/4	58281240	3/4" EMT Conduit Bender with Handle (Aluminum Head)					
MCB1/2	58281340	1/2" EMT Conduit Bender with Handle (Aluminum Head)					
	HEIGHT	WIDTH	DEPTH	WEIGHT	CONDUIT SIZE		
MCB1	1.75"	12"	45"	13 lbs	1" EMT 3/4" Rigid		
MCB3/4	1.25"	9"	39"	9 lbs	3/4" EMT 1/2" Rigid		
MCB1/2	1.25"	8"	39"	7 lbs	1/2" EMT		

12" HAND CABLE BENDER



The CB12-350 has a forged, one-piece, steel design for quick and easy bending. It is ideal for bending 350 MCM cables.

- Black oxide finish for corrosion resistance
- Dipped grip handles
- Forged one-piece design
- High strength steel
- 350 MCM cable capacity

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION			
CB12-350	58739140	CB12-350 12" 350 MCM Hand Cable Bender			
	LENGTH	WIDTH	DEPTH	WEIGHT	
CB12-350	12"	1.86"	.85"	0.95 lbs	

14" HAND CABLE BENDER



The CB14-500 has a forged, one-piece, steel design for quick and easy bending. It is ideal for bending 500 MCM cables.

- · Black oxide finish for corrosion resistance
- Dipped grip handles
- Forged one-piece design
- High strength steel
- 500 MCM cable capacity


MODEL #	STOCK #	DESCRIPTION			
CB14-500	58739240	CB14-500 14" 500 MCM Hand Cable Bender			
	LENGTH	WIDTH	DEPTH	WEIGHT	
CB14-500	14.25"	2.22"	1.35"	1.6 lbs	

When there's no room for error, depend on our reliable test and measurement tools to get the job done. Backed by a five year warranty, these tools withstand the elements and provide accurate, versatile, and professional results that every electrician can count on.



MAPPTM MOBILE APP

MAPP™ MOBILE APP

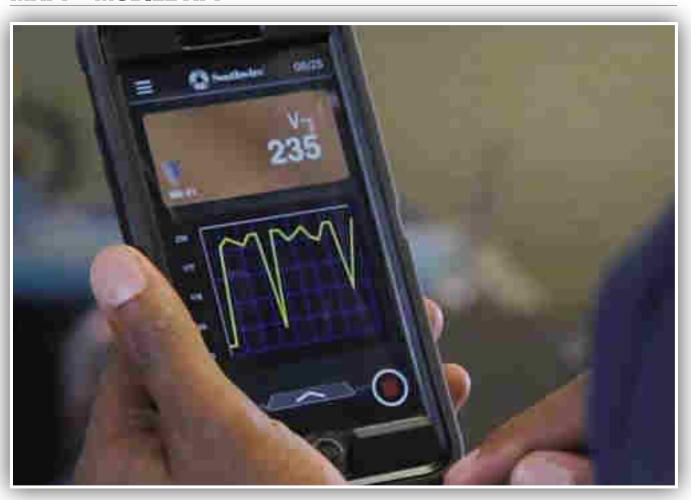





Mobile app for connecting to Southwire Bluetooth® enabled meters.

- View readings from a safe distance right from your mobile phone
- . Set up recording sessions
- · Add photos and notes to create a detailed report
- . Pop-up menu to modify meter settings remotely
- · Communicate critical equipment issues by email

MAPPTM MOBILE APP



VIEW READINGS AND SET UP RECORDING SESSIONS FROM MOBILE DEVICE



JOB VALIDATION: ADD PHOTOS, NOTES AND GPS LOCATION



POP-UP MENU MODIFIES METER SETTINGS REMOTELY



E-MAIL REPORTS TO MAINTENANCE TEAM ON CRITICAL EOUIPMENT ISSUES

TECHNICIANPRO™ BLUETOOTH® CAT IV MULTIMETER

14090T



















This Bluetooth® enabled multimeter in combination with Southwire's MApp™ mobile app allows you to view, record, and share readings on your smartphone. It is designed for demanding environments. Features include a CAT IV safety rating, a rugged IP67 waterproof and dust tight housing, TrueRMS and Low-Z readings, backlit controls, and a powerful built-in work light.

- Features automatic power off
- Bluetooth® interface for viewing, recording and sharing using Southwire's Mapp™ mobile app
- · Lighted controls and backlit display allow use in dimly lit areas
- TrueRMS readings provide higher accuracy on AC circuits
- Low-Z function eliminates false readings from "ghost" voltage
- Includes magnetic hanging strap for hands-free operation
- Powerful LED work light for added convenience
- CAT IV 600V/CAT III 1000V safety rating and IP67 waterproof and dust tight housing
- Includes
 - Test leads
 - Type K temperature probe with banana plug adapter
 - Magnetic hanging strap
 - Carrying case
 - Four AAA batteries









MODEL #	STOCK #	DESCRIPTION	
14090T	63018440	TechnicianPRO™ Bluetooth® CAT IV Multi	meter
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	1000V	1mV	±1.0%
Low-Z (AC Voltage)	600V	1mV	±3.0%
DC Voltage	1000V	0.1mV	±0.9%
Low-Z (DC Voltage)	600V	0.1mV	±3.0%
AC + DC Voltage	1000V	1mV	±2.0%
AC Current	10A	0.1μΑ	±1.0%
DC Current	10A	0.1μΑ	±1.0%
Resistance	60ΜΩ	0.1Ω	±1.5%
Capacitance	6000μF	10pF	±3.0%
Frequency	10kHz	0.001Hz	±1.0%
Duty Cycle	20 to 80%	0.1%	±1.2%
Temperature	-4°F to 1400°F -20°C to 780°C	0.1°	±1.5%
Continuity	Audible threshold approx. 50Ω		
Diode Test	Yes		
Dimensions	6.7 x 3.0 x 1.9 in.		
Weight	0.85 lb.		

TECHNICIANPRO™ TRUERMS CAT IV MULTIMETER

14070T

















This built-tough multimeter offers a CAT IV safety rating and an IP67 waterproof and dust tight housing. With TrueRMS readings, a Low-Z measurement function, backlit controls, and a powerful built-in work light, it has the features needed for the professional electrician.

- · Features automatic power off
- Lighted controls and backlit display allow use in dimly lit areas
- Low-Z function eliminates false readings from "ghost" voltage
- TrueRMS readings provide higher accuracy on AC circuits
- Includes magnetic hanging strap for hands free operation
- Powerful LED work light for added convenience
- CAT IV 600V/CAT III 1000V safety rating and IP67 waterproof and dust tight housing
- · Built-in test lead storage
- Includes
 - Test leads
 - Type K temperature probe with banana plug adapter
 - · Magnetic hanging strap
 - Carrying case
 - Four AAA batteries









MODEL #	STOCK #	DESCRIPTION			
14070T	63018240	TechnicianPRO™ TrueRMS CAT IV Multimeter			
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)		
AC Voltage	1000V	1mV	±1.0%		
Low-Z (AC Voltage)	600V	1mV	±3.0%		
DC Voltage	1000V	0.1mV	±1.0%		
Low-Z (DC Voltage)	600V	0.1mV	±3.0%		
AC Current	10A	0.1μΑ	±1.5%		
DC Current	10A	0.1μΑ	±1.0%		
Resistance	60ΜΩ	0.1Ω	±1.5%		
Capacitance	6000μF	10pF	±3.0%		
Frequency	10kHz	0.001Hz	±1.0%		
Duty Cycle	20 to 80%	0.1%	±1.2%		
Temperature	-4°F to 1400°F -20°C to 780°C	0.1°	±2.0%		
Continuity	Audible threshold approx. 50Ω				
Diode Test	Yes				
Dimensions	6.7 x 3.0 x 1.9 in.				
Weight	0.85 lb.				

TECHNICIANPRO™ AUTO RANGING CAT IV MULTIMETER

14060S











This built-tough multimeter offers a CAT IV safety rating and an IP67 waterproof and dust tight housing. With 11 measuring functions, backlit controls, and a powerful built-in work light, it's fully equipped for a wide range of applications.

- · Features automatic power off
- 11 measuring functions plus MAX/MIN
- Lighted controls and backlit display allow use in dimly lit areas
- · Powerful LED work light for added convenience
- · Includes magnetic hanging strap for hands free operation
- Rugged IP67 waterproof and dust tight housing
- CAT IV 600V/CAT III 1000V safety rating, UL listed
- Built-in test lead storage
- Includes
 - Test leads
 - Type K temperature probe with banana plug adapter
 - Magnetic hanging strap
 - Carrying case
 - Four AAA batteries









MODEL #	STOCK #	DESCRIPTION	
14060S	63028740	TechnicianPRO™ Auto-ranging CAT IV Multimeter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	1000V	1mV	±1.0%
DC Voltage	1000V	0.1mV	±1.0%
AC Current	10A	0.1μΑ	±1.5%
DC Current	10A	0.1μΑ	±1.0%
Resistance	60ΜΩ	0.1Ω	±1.5%
Capacitance	4000μF	10pF	±3.0%
Frequency	10kHz	0.001Hz	±1.0%
Duty Cycle	1 to 99.9%	0.1%	±1.2%
Temperature	-4°F to 1400°F -20°C to 780°C	0.1°	±3.0%
Continuity	Audible threshold approx. 30Ω		
Diode Test	Yes		
Dimensions	6.7 x 3.0 x 1.9 in.		
Weight	0.85 lb.		

RESIDENTIALPRO™ BLUETOOTH® CAT III MULTIMETER

13090T

















This Bluetooth® enabled multimeter in combination with Southwire's MApp™ mobile app allows you to view, record, and share readings on your smartphone. With TrueRMS and Low-Z readings, a rugged waterproof and dust proof housing, and built-in flashlight, this compact multimeter can be used in a wide range of applications.

- · Features automatic power off
- Bluetooth® interface for viewing, recording and sharing using Southwire's MApp™ mobile app
- TrueRMS readings provide higher accuracy on AC circuits
- Low-Z function eliminates false readings from "ghost" voltage
- Powerful LED work light for added convenience
- Rugged IP67 waterproof and dust tight housing
- CAT III 600V safety rating, UL listed
- Built-in test lead storage
- Includes
 - Test leads
 - Type K temperature probe with banana plug adapter
 - Three AAA batteries









MODEL #	STOCK #	DESCRIPTION	
13090T	63016040	ResidentialPRO™ Bluetooth® CAT III Multimeter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	600V	1mV	±1.0%
Low-Z (AC Voltage)	300V	1mV	±1.5%
DC Voltage	600V	0.1mV	±1.0%
Low-Z (DC Voltage)	300V	0.1mV	±1.5%
AC Current	10A	1mA	±2.5%
DC Current	10A	1mA	±2.0%
Resistance	40ΜΩ	0.1Ω	±1.5%
Capacitance	4000μF	10pF	±3.0%
Frequency	10kHz	0.001Hz	±1.0%
Duty Cycle	1.0 to 99.9%	0.1%	±1.2%
Temperature	0°F to 1400°F -18°C to 760°C	0.1°	±2.0%
Continuity	Audible threshold: approx. 50Ω		
Diode Test	Yes		
Dimensions	5.8 x 2.7 x 2.0 in.		
Weight	0.70 lb.		

RESIDENTIALPRO™ TRUERMS CAT III MULTIMETER

13070T









Bluetooth





With 11 measurement functions including TrueRMS readings, Low-measurement features, and a rugged waterproof and dust proof housing, this compact multimeter has the features needed to get the job done. A built-in flashlight provides added convenience.

- Features automatic power off
- TrueRMS readings provide higher accuracy on AC circuits
- Low-Z function eliminates false readings from "ghost" voltage
- 11 measuring functions plus MAX/MIN
- · Powerful LED work light for added convenience
- Rugged IP67 waterproof and dust tight housing
- CAT III 600V safety rating, UL listed
- Built-in test lead storage
- Includes
 - Test leads
 - Type K temperature probe with banana plug adapter
 - Three AAA batteries









MODEL #	STOCK #	DESCRIPTION	
13070T	63015040	ResidentialPRO™ TrueRMS CAT III Multimeter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	600V	1mV	±1.5%
Low-Z (AC Voltage)	300V	1mV	±1.5%
DC Voltage	600V	0.1mV	±0.8%
Low-Z (DC Voltage)	300V	0.1mV	±0.8%
AC Current	10A	1mA	±3.0%
DC Current	10A	1mA	±2.5%
Resistance	40ΜΩ	0.1Ω	±1.2%
Capacitance	4000μF	10pF	±3.0%
Frequency	10kHz	0.001Hz	±1.2%
Duty Cycle	0.1 to 99.9%	0.1%	±1.2%
Temperature	-4°F to 1400°F -20°C to 760°C	0.1°	±3.0%
Continuity	Audible threshold approx. 40Ω		
Diode Test	Yes		
Dimensions	5.8 x 2.7 x 2.0 in.		
Weight	0.70 lb.		

RESIDENTIALPRO™ AUTO RANGING CAT III MULTIMETER

13050S









With 11 measuring functions, an easy-to-read backlit display, and a rugged IP67 waterproof and dust proof housing, this compact multimeter is perfect for general use. A built-in flashlight provides added convenience.

- · Features automatic power off
- 11 Measuring functions plus MAX/MIN
- Backlit 4,000-count display with bar graph
- Powerful LED work light for added convenience
- Rugged IP67 waterproof and dust tight housing
- CAT III 600V safety rating UL listed
- Built-in test lead storage
- Includes
 - Test leads
 - Type K temperature probe with banana plug adapter
 - Three AAA batteries









MODEL #	STOCK #	DESCRIPTION	
13050S	63014540	ResidentialPRO™ Auto ranging CAT III Multimeter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	600V	1mV	±1.5%
DC Voltage	600V	0.1mV	±0.8%
AC Current	10A	1mA	±3.0%
DC Current	10A	1mA	±3.0%
Resistance	40ΜΩ	0.1Ω	±1.2%
Capacitance	4000μF	10pF	±3.0%
Frequency	10kHz	0.001Hz	±1.2%
Duty Cycle	0.1 to 99.9%	0.1%	±1.2%
Temperature	-4°F to 1400°F -20°C to 760°C	0.1°	±3.0%
Continuity	Audible threshold approx. 50Ω		
Diode Test	Yes		
Dimensions	5.8 x 2.7 x 2.0 in.		
Weight	0.70 lb.		

AUTOSELECTING CAT IV MULTIMETER

16030A













Easy-to-use TrueRMS CAT IV multimeter automatically selects AC or DC voltage when connected to live circuits. Added features include a rugged IP67 waterproof and dust tight housing, a built-in flashlight and non-contact AC voltage detector, and auto hold for fast touch-and-hold readings.

- · Features automatic power off
- Automatically selects AC or DC voltage
- Auto hold function for quick touch and hold readings
- TrueRMS readings provide higher accuracy on AC circuits
- Easy-to-read 4,000-count backlit display
- . Built-in, non-contact AC voltage detector and powerful work light
- Rugged IP67 waterproof/dust tight housing
- . CAT IV 600V safety rating, UL listed
- Built-in test lead storage
- Includes
 - Test leads
 - Two AAA batteries







MODEL #	STOCK #	DESCRIPTION	
16030A	63019140	Autoselecting CAT IV Multimeter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	600V	0.1V	±1.0%
DC Voltage	600V	0.1V	±1.0%
Non-Contact AC Voltage	100 to 600V AC	_	_
Resistance	400kΩ	0.1Ω	±2.0%
Continuity	Audible threshold approx. 50Ω		
Dimensions	5.5 x 3.0 x 1.6 in.		
Weight	0.50 lb.		

COMPACT 3-IN-1 CAT IV MULTIMETER

16020N





Designed for the electrician on the go, this compact CAT IV 3-in-1 combination multimeter with built-in flashlight and non-contact AC voltage detector is a great fit for a crowded tool bag.



APO

NCV

- · Features automatic power off
- 3-in-1 Combination: multimeter, work light and non-contact AC voltage detector
- Compact size with integrated test leads is perfect for crowded tool bag
- 10 measuring functions
- · Fuse automatically resets itself
- Rugged double-molded housing
- CAT IV 600V safety rating, UL listed
- Built-in test lead storage
- Includes:
 - . Multimeter with integrated test leads
 - Two AAA batteries







MODEL #	STOCK #	DESCRIPTION	
16020N	63018640	Compact 3-in-1 CAT IV Multimeter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	600V	0.1mA	± 1.0%
DC Voltage	600V	0.1mA	± 0.5%
Non-Contact AC Voltage	100 to 600V AC	_	-
AC Current	200mA	0.1μΑ	±2.5%
DC Current	200mA	0.1μΑ	±2.0%
Resistance	40MΩ	0.1Ω	±0.8%
Capacitance	100μF	10pF	±3.0%
Frequency	10kHz	0.001Hz	±2.0%
Duty Cycle	0.5 to 99%	0.1%	±2.0%
Continuity	Audible threshold approx. 100Ω		
Diode Test	Yes		
Dimensions	4.6 x 2.3 x 1.4 in.		
Weight	0.32 lb.		

AUTO-RANGING MULTIMETER

10041N











The Southwire 10041N multimeter provides all the features & functions you'll ever need in an affordable multimeter. Features include a rugged double-molded housing, CAT III 600V safety rating, and a built-in non-contact AC voltage tester. Meets the latest UL safety standards.

- Measures AC/DC voltage up to 600V, Resistance up to 2MΩ, and AC and DC current up to 10A
- CAT III 600V Safety Rating
- Measures capacitance, frequency, temperature and duty cycle.
 Tests batteries, continuity, and diodes.
- Built-In Non-Contact AC Voltage Detector
- Convenience features include built-in test probe holder, kickstand, easy-change fuses, and accepts Southwire magnetic hanging strap (available separately)
- Built to withstand a 6-foot drop
- . Meets the latest UL safety standard
- Backlit LCD Display
- Auto Power Off preserves battery life









MODEL #	STOCK #	DESCRIPTION	
10041N	65031240	Auto-Ranging Multimeter	
	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	600V	1mV	+/-(1.2%+5)
DC Voltage	600V	0.1mV	+/-(0.8%+8)
NCV	50-600V		
AC Current	10A	0.1μΑ	+/-(1.5%+5)
DC Current	10A	0.1μΑ	+/-(1.0%+5)
Resistance	40.00ΜΩ	0.1Ω	+/-(1.2%+5)
Capacitance	100μF	10pF	+/-(5.0%+/- 7)
Frequency	10MHz	0.01Hz	+/-(1.0%+5)
Duty Cycle	99.90%	0.10%	+/-1.5% +/- 5
Temperature	-22 to 140°F	1°F	+/-3%
Diode Test		.001V	
Continuity		0.1Ω	
Diode Test		.001V	
Battery Test	1.5V	1mV	+/- (1.0%+5)
Battery Test	9V	10mV	+/- (1.0%+5)
Dimensions	6.1 x 2.9 x 2.1 in.		
Weight	0.5lb.		
Safety Rating	CAT III 600V		

MANUAL RANGING MULTIMETER

10031S





This Southwire general purpose multimeter is perfect for basic electrical repairs & troubleshooting. Features include a rugged double-molded housing, large LCD display, and battery test function. Meets the latest UL safety standards.



- Measures AC/DC voltage up to 600V, Resistance up to $2M\Omega$, and DC current up to 10A
- CAT III 300V Safety Rating
- · Tests batteries and continuity
- Built to withstand a 6-foot drop
- Meets the latest UL safety standard
- Convenience features include built-in test probe holder, kickstand, easy-change fuses, and accepts Southwire magnetic hanging strap (available separately)
- Auto Power Off preserves battery life









MODEL #	STOCK #	DESCRIPTION	
10031S	65031140	Manual-Ranging Multimeter	
	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	600V	100mV	+/-(1.2%+10)
DC Voltage	600V	0.1mV	+/-(0.8%+8)
DC Current	10A	1μΑ	+/-(1.0%+5)
Resistance	2.000ΜΩ	0.1Ω	+/-(0.8%+5)
Continuity		0.1Ω	
Battery Test	1.5V	1mV	+/- (1.0%+5)
Battery Test	9V	10mV	+/- (1.0%+5)
Dimensions	6.1 x 2.9 x 2.1 in.		
Weight	0.6lb.		
Safety Rating	CAT III 300V		

MAINTENANCEPRO™ SMART 1000A CLAMP METER



















Southwire's new MaintenancePRO™ 23090T adds Bluetooth® connectivity to a rugged,high-end clamp meter. Used with our MApp™ mobile app, the 23090T lets electricians safely get the measurements they need even in hostile environments. The app can be used to view readings, set up recording sessions, and assemble complete reports right from your mobile phone. The feature set of the 23090T make this the optimal choice for the professional electrician.

- · Features automatic power off
- Bluetooth® interface for viewing, saving and sharing using Southwire's MApp™ mobile app
- Inrush function captures motor start-up current
- 11 measuring functions, plus MAX/MIN
- Precision TrueRMS meter
- Hi-Res 50,000-count backlit display with bargraph
- Built-in, non-contact AC voltage detector and powerful LED work light
- Rugged meter with CAT IV 600V / CAT III 1000V safety rating, UL listed
- Includes:
 - Test leads
 - Type K temperature probe with banana plug adapter
 - Carrying case
 - 9 volt battery







MODEL #	STOCK #	DESCRIPTION	
23090T	59686840	MaintenancePRO™ Bluetooth® 1000A Clamp Meter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Current	1000A	10mA	±2.5%
DC Current	1000A	10mA	±2.5%
Jaw Opening	1.9" (48mm)	_	_
AC Voltage	1000V	0.01mV	±1.0%
DC Voltage	1000V	0.01mV	±1.0%
Non-Contact AC Voltage	110 to 1000V AC	_	_
Resistance	50ΜΩ	0.01Ω	±1.0%
Capacitance	5mF	10pF	±3.5%
Frequency	10MHz	0.001Hz	±0.3%
Duty Cycle	5 to 95%	0.01%	±1.0%
Temperature	-148°F to 1832°F -100°C to 1000°C	0.1°	±1.0%
Continuity	Audible threshold approx. 50Ω		
Diode Test	Yes		
Dimensions	9.0 x 3.0 x 1.6 in.		
Weight	0.69 lb.		

MAINTENANCEPRO™ 1000A AC/DC CLAMP METER















The MaintenancePRO™ 23070T clamp meter is a rugged, high-end AC/DC clamp meter for the professional electrician who needs both AC and DC current measurements. With a UL listed safety rating of CAT IV 600V/CAT III 1000V, this clamp meter is built to get the tough jobs done.

- Features automatic power off
- 11 measuring functions plus MAX/MIN
- TrueRMS readings provide higher accuracy on AC circuits
- Measures both AC and DC current
- . Built-in, non-contact AC voltage detector and powerful LED work light
- 6,000-count backlit display with bar graph
- Rugged meter with CAT IV 600V/CAT III 1000V safety rating, UL listed
- Includes:
 - Test leads
 - Type K temperature probe with banana plug adapter
 - Carrying case
 - 9 volt battery







MODEL #	STOCK #	DESCRIPTION	
23070T	59686740	MaintenancePRO™ 1000A AC/DC Clamp Meter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Current	1000A	10mA	±2.5%
DC Current	1000A	10mA	±2.5%
Jaw Opening	1.9" (48mm)	_	_
AC Voltage	1000V	1mV	±1.5%
DC Voltage	1000V	0.1mV	±1.0%
Non-Contact AC Voltage	100 to 1000V AC	_	_
Resistance	60ΜΩ	0.1Ω	±1.0%
Capacitance	6000μF	10pF	±3.0%
Frequency	10MHz	0.001Hz	±1.0%
Duty Cycle	0.5 to 99.9%	0.01%	±1.2%
Temperature	-4°F to 1400°F -20°C to 760°C	0.1°	±3.0%
Continuity	Audible threshold approx. 50Ω		
Diode Test	Yes		
Dimensions	9.0 x 3.0 x 1.6 in.		
Weight	0.69 lb.		

MAINTENANCEPRO™ 1000A AC CLAMP METER













The MaintenancePRO™ 23030T clamp meter is a rugged, high-end AC clamp meter. With a UL listed safety rating of CAT IV 600V/CAT III 1000V, this clamp meter is built to get the tough jobs done. The feature set of the 23030T make it the new standard in residential, commercial, and maintenance clamp meters.

- · Features automatic power off
- 10 measuring functions plus MAX/MIN
- TrueRMS readings provide higher accuracy on AC circuits
- Powerful LED work light for added convenience
- . Built-in, non-contact AC voltage detector
- 6,000-count backlit display with bar graph
- Rugged meter with CAT IV 600V/CAT III 1000V safety rating, UL listed
- Includes:
 - Test leads
 - Type K temperature probe with banana plug adapter
 - · Carrying case
 - 9 volt battery







MODEL #	STOCK #	DESCRIPTION	
23030T	59686640	MaintenancePRO™ 1000A AC Clamp Meter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Current	1000A	10mA	±2.5%
Jaw Opening	1.9" (48mm)	_	_
AC Voltage	1000V	1mV	±1.5%
DC Voltage	1000V	0.1mV	±1.0%
Non-Contact AC Voltage	100 to 1000V AC	_	_
Resistance	60ΜΩ	0.1Ω	±1.0%
Capacitance	6000μF	10pF	±3.0%
Frequency	10MHz	0.001Hz	±1.0%
Duty Cycle	0.5 to 99.9%	0.01%	±1.2%
Temperature	-4°F to 1400°F -20°C to 760°C	0.1°	±3.0%
Continuity	Audible threshold approx. 50Ω		
Diode Test	Yes		
Dimensions	9.0 x 3.0 x 1.6 in.		
Weight	0.69 lb.		

400A AC/DC TRUE RMS CLAMP METER

21550T













The Southwire 21550T 400A AC/DC clamp meter with True RMS offers the features needed for the professional electrician including True RMS accuracy, the ability to measure both AC and DC current, and a built-in, non-contact, AC voltage detector. Other features included are REL and max/min functions in addition to standard multimeter functions such as resistance, capacitance, continuity, temperature, and diode. This clamp meter also has a third-hand test probe holder and a bright LED worklight. The 21550T is built-to-last and is guaranteed to survive a 6-foot drop.

- 400A AC/DC Current Range
- CAT III 600V Safety Rating
- True RMS Accuracy
- Built-In Non-Contact Voltage Tester
- Third-Hand Test Probe Holder







MODEL #	STOCK #	DESCRIPTION	
21550T	65031840	400A AC/DC True RMS Clamp Meter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Current	400A	0.01A	+/-(2.0%+9)
DC Current	400A	0.01A	+/-(2.0%+5)
AC Voltage	600V	0.001V	+/-(1.0%+5)
DC Voltage	600V	0.1mV	+/-(1.0%+8)
NCV	Yes		
Resistance	40ΜΩ	0.1Ω	+/-(1.0%+4)
Capacitance	1000μF	0.1nF	+/-(5.0%+/- 7)
Temperature	-5 - 750°F	1°F	+/-3.0%
Continuity		0.1Ω	
Diode Test		.001V	
Jaw Opening	1.1 in. (28mm)		
Dimensions	9" x 2.7" x 1.4"		
Weight	0.6lb.		
Safety Rating	CAT III 600V		

400A AC TRUE RMS CLAMP METER

21530T













The Southwire 21530T 400A AC clamp meter with True RMS offers the features needed for the professional electrician. It provides True RMS accuracy, AC current up to 400A, and a built-in, non-contact, AC voltage detector. Common multimeter functions include AC/DC voltage up to 600V, resistance, capacitance, continuity, temperature, and diode. The 21530T also provides a third-hand test probe holder and LED worklight for added convenience. The 21530T is built-to-last and is guaranteed to survive a 6-foot drop. Great for the professional.

- 400A AC Current Range
- CAT III 600V Safety Rating
- True RMS Accuracy
- Built-In Non-Contact Voltage Tester
- Third-Hand Test Probe Holder







MODEL #	STOCK #	DESCRIPTION	
21530T	65031640	400A AC True RMS Clamp Meter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
Feature	Range	Max. Resolution	Max. Accuracy (% of Reading)
AC Current	400A	0.01A	+/-(2.0%+9)
AC Voltage	600V	0.001V	+/-(1.0%+5)
DC Voltage	600V	0.1mV	+/-(1.0%+8)
NCV (non-contact AC Voltage)	Yes		
Resistance	40ΜΩ	0.1Ω	+/- (1.0%+4)
Capacitance	1000μF	0.1nF	+/-(3.0%+5)
Temperature	-5°F - 750°F	1°F	+/- 3.0%
Continuity		0.1Ω	
Diode Test		0.001V	
Jaw Opening	1.1 in. (28mm)		
Dimensions	9" x 2.7" x 1.4"		
Weight	0.6 lb.		
Safety Rating	CAT III 600V		

400A AC CLAMP METER









NCV



The Southwire 21510N 400A AC clamp meter offers the features needed for routine electrical repairs. In addition to measuring AC current up to 400A, the 21510N measures AC and DC voltage up to 600V plus provides common multimeter functions such as resistance, capacitance, continuity, temperature and diode. The 21510N offers a built-in, non-contact AC voltage detector and a powerful LED worklight for working in dimly lit areas. The 21510N also features a third-hand test probe holder for added convenience. This CAT III clamp meter is designed to survive a 6-foot drop, making it built to last. Great for basic electrical work.

- 400A AC current range
- CAT III 600V safety rating
- Built-in non-contact voltage tester
- Third-hand test probe holder







MODEL #	STOCK #	DESCRIPTION	
21510N	65031540	400A AC Clamp Meter	
FUNCTION	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
Feature	Range	Max. Resolution	Max. Accuracy (% of Reading)
AC Current	400A	0.01A	+/-(2.0%+9)
AC Voltage	600V	0.001V	+/-(1.0%+5)
DC Voltage	600V	0.1mV	+/-(1.0%+8)
NCV (non-contact AC Voltage)	Yes		
Resistance	40ΜΩ	0.1Ω	+/- (1.0%+4)
Capacitance	1000μF	0.1nF	+/-(3.0%+5)
Temperature	-5°F - 750°F	1°F	+/- 3.0%
Continuity		0.1Ω	
Diode Test		0.001V	
Jaw Opening	1.1 in. (28mm)		
Dimensions	9" x 2.7" x 1.4"		
Weight	0.6 lb.		
Safety Rating	CAT III 600V		

LCD VOLTAGE TESTER 600V AC/DC



Get a multimeter and non-contact voltage detector in one pocket tester. Great for beginning or experienced electricians. Features one of the largest backlit LCD displays in this category. Performs three essential electrician tasks: voltage detection, voltage testing, and continuity. Tests AC and DC voltage up to 600V. Features a built-in non-contact voltage detector and tests continuity with both visual and audible indicators. Fits comfortably in the pocket and has replaceable test leads. 5-year, no hassle warranty.

- · Backlit LCD Display
- **Built-in Non Contact Voltage Detector with Self Test**
- Tests Continuity with visual & audible confirmation
- · Bright LED Flashlight
- 0-600V AC measurement range
- 0-600V DC measurement range
- Replaceable Test Leads
- CAT IV 600V Safety Rated
- 6.5' drop tested









MODEL #	STOCK #	DESCRIPTION
41171N	65112140	LCD Voltage Tester 600V AC/DC
Voltage	6-600V AC/DC	
Safety Rating	CAT IV 600 V, Class 2, Double Insulation	
NCV Detection Range	100 V AC to 1000 V AC	
Drop Protection	6.5 feet (2 meters)	
AC Frequency Range	50 Hz/60 Hz	
Operating Temperature	32 °F to 104 °F (0°C to 40°C)	
Storage Temperature	14 °F to 122 °F (-10°C to 50°C)	

VOLTAGE TESTER 600V AC 400V DC



An ideal test tool for the beginning electrician or for use as a back-up tester for more experienced electricians. Perfect for trade schools too. Performs three essential functions: voltage detection, voltage testing, and continuity. Features an easy-to-read LED display and tests AC voltage up to 600V and DC voltage up to 400V. Has a built-in non-contact voltage detector and tests continuity. Fits comfortably in the pocket, accepts a hanging strap, and has replaceable test leads. 5-year, no hassle warranty.

- Bright LED Display
- . Built-in Non Contact Voltage Detector with Self Test
- Tests Continuity with visual & audible confirmation
- · Bright LED Flashlight
- Indicates AC voltage from 12-600V AC in 9 steps
- Indicates DC voltage from 9-400V in 9 steps with polarity indication
- Replaceable Test Leads
- CAT IV 600V Safety Rated
- 6.5' drop tested









MODEL #	STOCK #	DESCRIPTION
41161N	65112040	Voltage Tester 600V AC 400V DC
Voltage LED Steps	AC: 12, 24, 48, 120, 208, 240, 277, 480, 60 DC: 9, 12, 24, 36, 48, 60, 110, 220, 400	0
Safety Rating	CAT IV 600 V, Class 2, Double Insulation	
NCV Detection Range	100 V AC to 1000 V AC	
Drop Protection	6.5 feet (2 meters)	
AC Frequency Range	50 Hz/60 Hz	
Operating Temperature	32 °F to 104 °F (0°C to 40°C)	
Storage Temperature	14 °F to 122 °F (-10°C to 50°C)	

VOLTAGE TESTER 480V AC 110V DC

41151S







The 41151S compact voltage and GFCI tester features an easy to read LED display. It's a simple and safe way to test for live circuits, measure voltage, and test if GFCI circuits are functioning properly. This pocket tester tests AC voltage up to 480V and DC voltage up to 110V.

- Bright LED Display
- Indicates AC voltage from 12-480V in 6 steps
- Indicated DC voltage from 9-110V in 6 steps with polarity indication
- Tests GFCI outlets and circuits
- · CAT III 600V safety rating
- Tamper resistant outlet compatible
- Test probes store concealed
- . 6.5' drop tested







DURABILITY CERTIFIED
6.5' DROP TESTED


MODEL #	STOCK #	DESCRIPTION
41151S	65111940	Voltage Tester 480V AC 110V DC
Voltage LED Steps	AC: 12, 24, 48, 120, 240, 480 DC: 9, 12, 24, 36, 48, 110	
Safety Rating	CAT III 600V	
Drop Protection	6.5 feet (2 meters)	
AC Frequency Range	50 Hz - 60 Hz	
Operating Temperature	32 °F to 104 °F (0°C to 40°C)	
Storage Temperature	14 °F to 122 °F (-10°C to 50°C)	

ADVANCED DUAL RANGE NCV 12-1000V AC

40150N







- · Features automatic power off
- · High power rear flashlight and forward facing flashlight
- · Thinner probe tip for working with wall outlets
- Power switch (standard)
- · Green LED means Power on
- · Flashing red LED with beeper means voltage is detected
- · Low-Battery self test
- · High voltage and low voltage modes
- · Silent mode
- IP67 Waterproof









MODEL #	STOCK #	DESCRIPTION
40150N	63020740	40150N Advanced Dual Range NCV 12-1000V AC
AC Detection Range	12-1000V & 100-1000V AC	
Safety Rating	CAT IV 1000V	
Frequency Range	50/60Hz	
Batteries	Two AAA	
Operating Temperature	32°F to 104°F (0°C to 40°C)	
Storage Temperature	14°F to 140°F (-10°C to 60°C)	
Dimensions	6.23 x 0.83 x 0.99 in (158 x 21 x 25 mm)	
Humidity	80% max	

NCV DETECTOR 50-600V AC PRO

40136N












NCV detector 50-600V AC Pro

- · Features automatic power off
- · Flashlight now 2X brighter
- Thinner probe tip for working with wall outlets
- Power switch (standard)
- Green LED means Power on
- Flashing red LED with beeper means voltage detected
- · Low battery self test
- · Silent mode
- · Flash and beep rate increase as the detector gets closer to the voltage source helping the user pinpoint live circuits

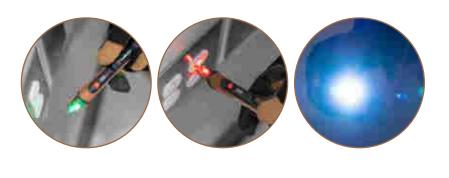

MODEL #	STOCK #	DESCRIPTION
40136N	59992440	40136N NCV Detector 48-600V AC Pro
AC Detection Range	50-600V AC	
Safety Rating	CAT IV 600V	
Frequency Range	50/60Hz	
Batteries	Two AAA	
Operating Temperature	32°F to 104°F (0°C to 40°C)	
Storage Temperature	14°F to 140°F (-10°C to 60°C)	
Dimensions	6.23 x 0.83 x 0.99 in (158 x 21 x 25 mm)	
Humidity	80% max	

40126N NCV DUAL RANGE 24-600V AC

40126N









NCV dual range 24-600V & 100-600V AC.

- Flashlight now 2X brighter
- . Thinner probe tip for working with wall outlets
- Power switch (standard)
- · Green LED means Power on
- · Flashing red LED with beeper means voltage detected
- Low battery self test
- · High voltage and low voltage mode



MODEL #	STOCK #	DESCRIPTION
40126N	59992240	40126N NCV Dual Range 24-600V AC
AC Detection Range	24-600V & 100-600V AC	
Safety Rating	CAT IV 600V	
Frequency Range	50/60Hz	
Batteries	Two AAA	
Operating Temperature	32°F to 104°F (0°C to 40°C)	
Storage Temperature	14°F to 140°F (-10°C to 60°C)	
Dimensions	6.23 x 0.83 x 0.99 in (158 x 21 x 25 mm)	
Humidity	80% max	

NCV DETECTOR 100-600V AC

40116N







APO)



NCV detector 100-600V AC.

- · Flashlight now 2X brighter
- · Thinner probe tip for working with wall outlets
- Power switch (standard)
- · Green LED means power on
- Flashing red LED with beeper means voltage detected
- · Low battery self test



MODEL #	STOCK #	DESCRIPTION
40116N	59992040	40116N NCV Detector 100-600V AC
AC Detection Range	100-600V AC	
Safety Rating	CAT IV 600V	
Frequency Range	50/60Hz	
Batteries	Two AAA	
Operating Temperature	32°F to 104°F (0°C to 40°C)	
Storage Temperature	14°F to 140°F (-10°C to 60°C)	
Dimensions	6.23 x 0.83 x 0.99 in (158 x 21 x 25 mm)	
Humidity	80% max	

GFCI RECEPTACLE TESTER



GFCI receptacle tester quickly identifies the most common wiring faults associated with 3-wire 120V outlets. Just plug it into the outlet and the indicator lights quickly tell you if the outlet is wired correctly. Press the red button to verify that a GFCI circuit is functioning properly.

- Tests standard 120V outlets
- Tests ground fault circuit interrupter (GFCI) outlets & circuits
- · Three light indicators identify wiring faults
- · Wiring legend on the top and bottom of the tester so it's always easy to see
- UL listed



MODEL #	STOCK #	DESCRIPTION
40022S	65032040	GFCI Receptacle Tester
0•0	Open Ground	Ground contact is not connected
00•	Open Neutral	Neutral contact is not connected
000	Open Hot	Hot contact is not connected
•0•	Hot/Ground Reversed	Hot and ground connections are interchanged
••0	Hot/Neutral Reversed	Hot and neutral connections are interchanged
000	Correct	Receptacle is wired correctly

RECEPTACLE TESTER



Receptacle Tester quickly identifies the most common wiring faults associated with 120V outlets. Just plug it in and the indicator lights quickly tell you if the outlet is wired correctly.

- Tests standard 120V outlets Performs 6 tests: open ground, open neutral, open hot, hot/ground reversed, hot/neutral reversed, or wired correctly
- . Three light indicators identify wiring faults
- . Wiring legend on the top and bottom of the tester so it's always easy to see
- UL listed



MODEL #	STOCK #	DESCRIPTION
40012S	65031940	Receptacle Tester
0•0	Open Ground	Ground contact is not connected
00•	Open Neutral	Neutral contact is not connected
000	Open Hot	Hot contact is not connected
●○●	Hot/Ground Reversed	Hot and ground connections are interchanged
••0	Hot/Neutral Reversed	Hot and neutral connections are interchanged
000	Correct	Receptacle is wired correctly

PRO CONTINUITY TESTER WITH REMOTE

40040S



The Southwire 40040S provides a simple way of checking continuity on wire and cables. The bright LEDs and loud pulsating beeper provide a positive indication of continuity and polarity. A detachable remote indicator is included for tracing multiple cable runs.

- . Bi-color LEDs determine polarity
- · Color coded alligator clips for easy connection
- · Wiring legend on tester provides simple operation
- · Rugged double-molded housing







MODEL #	STOCK #	DESCRIPTION
40040S	59724840	Pro Continuity Tester with Remote
FUNCTION	RANGE	
Dimensions	4.0 x 2.1 x 1.3 inch	
Weight	0.42 lb. (191g)	

4-WAY VOLTAGE TESTER

40141S







The 4-Way Voltage Tester is a handy, pocket size tester that checks live AC voltage from 120 to 480 volts and DC voltage from 160 to 600 volts in four easy steps. The 40141S is easy to read and features a convenient, compact design.

- Tests AC voltage from 120V to 480V
- Tests DC voltage from 160V to 600V
- CAT III 600V safety rating
- . Built-in test leads and handy pocket clip
- · No batteries required
- Test probes conveniently store in the back of the tester and are spaced to fit standard AC outlets
- UL listed
- . Built to withstand a 6-foot drop



MODEL #	STOCK #	DESCRIPTION	
40141S	65032240	4-Way Voltage Tester	
Voltage LED Steps	AC: 120, 240, 277, 480 DC: 160, 330, 380, 600		
AC Operating Frequency	60Hz		
Safety Rating	CAT III 600V		
Drop Protection	6.5 feet (2 meters)		
Operating Temperature	32 °F to 104 °F (0°C to 40°C)		
Storage Temperature	14 °F to 122 °F (-10°C to 50°C)		

930°F 12:1 IR THERMOMETER

31212S



Southwire's newest dual-laser IR thermometer, the 31212S, is designed for the professional because it's accurate, rugged, and easy-to-use. Perfect for everyday use but loaded with advanced features for ultimate flexibility. Customers appreciate the extra-large, backlit temperature display that's easy to see in almost any environment.

- · Designed for the professional
- · Dual-laser targeting for precise aiming
- 12:1 optics for extra-long distance accuracy
- · Extra large, uncluttered, backlit temperature display
- Adjustable emissivity higher accuracy when measuring different materials
- Displays temperature in °F or °C
- Protective carrying pouch included
- Continuous Measurement. Built-in tripod mount and LOCK Mode
- High and Low Temperature Alarms
- MAX, MIN, AVE, DIF Mode







MODEL #	STOCK #	DESCRIPTION		
31212\$	65111840	930°F 12:1 IR Thermometer		
Measurement Range	-26°F - 932°F (-32°C - 500°C)			
Working Temperature	32°F - 122°F (0°C - 50°C)			
Working Relative Humidity	<90% RH (non-condensing)			
Storage Temperature	-4°F - 140°F (-20°C - 60°C)			
	SURFACE TEMPERATURE		ACCURACY	AMBIENT TEMPERATURE
	-26°F ≤ t 32°F		+/- (3.6°F + 0.1°F/°F)	
Accuracy	32°F < t ≤ 932°F		+/- 3.6°F or 1.8% of reading, whichver is greater	69.8°F - 77 °F
	-32°C ≤ t 0°C		+/- (1.8°C + 0.1°C/°C)	
	0°C < t ≤ 500°C		+/- 1.8°C or 1.8% of reading, whichver is greater	21°C - 25 °C
D:S Ratio (Distance to Spot)	12:1 (Applies for 90% for the mo	easuring signal)		
Emissivity	0.1 ~ 1.0 (Adjustable)			
Display Resolution	0.1°F (0.1°C)			

750°F 10:1 IR THERMOMETER

31011F



When you need an IR thermometer that's simple and economical, the Southwire 31011F is the right model for you. Just point-and-shoot for accurate and repeatable temperature measurements around the house or on the job.

- · Simple & economical
- · Single-laser targeting
- . 10:1 optics for long distance accuracy
- Fixed emissivity (0.95)
- · Displays temperature in °F or C
- · Low-battery indicator
- Built for the Work Environment: 6-Ft Drop Rating



MODEL #	STOCK #	DESCRIPTION		
31011F	65111640	750°F 10:1 IR Thermometer		
Measurement Range	-4°F - 752°F (-20°C - 400°C)			
Working Temperature	32°F - 122°F (0°C - 50°C)			
Working Relative Humidity	<90% RH (non-condensing)			
Storage Temperature	-4°F - 140°F (-20°C - 60°C)			
	SURFACE '	TEMPERATURE	ACCURACY	AMBIENT TEMPERATURE
	-4°F ≤ t 32°F		+/- (4°F + 0.1°F/°F)	
Accuracy	32°F < t ≤ 752°F		+/- 4°F or +/- 2% of reading, whichver is greater	69.8°F - 77 °F
	-20°C ≤ t 0°C		+/- (2°C + 0.1°C/°C)	
	0°C < t ≤ 400°C		+/- 2.0°C or 2% of reading, whichver is greater	21°C - 25 °C
D:S Ratio (Distance to Spot)	10:1 (Applies for 90% for the me	easuring signal)		
Emissivity	Fixed at 0.95			
Display Resolution	0.1°F (0.1°C)			

41210S CIRCUIT BREAKER FINDER WITH GFCI



The circuit breaker finder pinpoints the specific breaker powering the circuit being worked on. Eliminates guessing and unwanted power outages caused by tripping the wrong breaker.

- · Advanced design quickly and reliably pinpoints single breaker without service interruption
- Tests GFCI outlets
- · For use on energized circuits
- Includes:
 - · 41210S Transmitter and Receiver
 - · 3-prong to 2-prong adapter
 - 9 volt battery
- · Available accessory: 60030S Adapter Kit

MODEL #	STOCK #	DESCRIPTION
41210\$	58292140	Circuit Breaker Finder with GFCI
Dimensions	7.56 in. x 2.52 in. x 1.65 in.	

TYPE K TEMPERATURE CLAMP



The 60020S Type K temperature clamp allows quick maintenance checks on heating and air-conditioning systems. It's the perfect accessory for clamp meters and multimeters with a temperature function.

- For multimeters, clamp meters and thermometers that accept a type K temperature probe
- Spring-loaded jaw clamps around heating/cooling pipes up to 1.5" in diameter
- Temperature range: -4° to 200°F (-20° to 93°C)

	IPTION
60020S 58293140 Type K Temperature Clamp	mperature Clamp

TEST LEAD KIT

60010S



60010S Test lead kit includes universal replacement leads for all Southwire meters.

- UL listed
- CAT IV 600V/CAT III 1000V
- Includes alligator clip attachments (CAT III 600V)

MODEL #	STOCK #	DESCRIPTION
60010S	58292940	Test Lead Kit

ADAPTER KIT FOR CIRCUIT BREAKER FINDER



This adapter kit includes a light socket adapter that allows for rapid location of circuit breakers connected to lighting fixtures. Also includes alligator clips that allow the transmitter to be connected to unterminated branch circuit wiring.

· For use with 41210S circuit breaker finder

MODEL #	STOCK #	DESCRIPTION
60030S	58292240	Adapter Kit for Circuit Breaker Finder

ELECTRICAL TEST KIT

10037K





The Southwire electrical test kit combines three of Southwire's most popular test and measurement products into one convenient kit. Ideal for household repairs and electrical troubleshooting.

- 10031S Manual ranging multimeter is CAT III 300V safety rated.
 It measures AC/DC voltage, resistance, and DC current. Also tests batteries and continuity.
- 40117N Non-contact AC voltage detector has a 90-1000V detection range, CAT IV 1000V safety rating, automatic self test, and features a bright LED flashlight
- 40012S Receptacle tester verifies wiring errors in standard 3-wire AC outlets. Just plug it into the receptacle. LED indicators and wiring legend identify faults
- · All products are UL listed and meet the latest UL safety standards
- All products are built to withstand a 6-foot drop

MODEL #	STOCK #	DESCRIPTION
10037K	65031340	Electrical Test Kit

MODEL #	STOCK #	DESCRIPTION	
10031S	65031140	Manual-Ranging Multimeter	
FEATURE	RANGE	MAX. RESOLUTION	MAX. ACCURACY (% OF READING)
AC Voltage	600V	100mV	+/-(1.2%+10)
DC Voltage	600V	0.1mV	+/-(0.8%+8)
DC Current	10A	1µА	+/-(1.0%+5)
Resistance	2.000ΜΩ	0.1Ω	+/-(0.8%+5)
Continuity		0.1Ω	
Battery Test	1.5V	1mV	+/- (1.0%+5)
Battery Test	9V	10mV	+/- (1.0%+5)
Dimensions	6.1 x 2.9 x 2.1 in.		
Weight	0.6lb.		
Safety Rating	CAT III 300V		

MODEL #	STOCK #	DESCRIPTION
40117N	N/A	1000V AC Voltage Detector
Detection Voltage Range	90V AC to 1000V AC	
Frequency Range	50/60Hz	
Safety Rating	CAT IV 1000V	

MODEL #	STOCK #	DESCRIPTION	
40012S	65031940	Receptacle Tester	
Identifies	Open Ground, Open Neutral, Open Hot, Hot/Ground Reversed, Hot/Neutral Reversed, Correct Wiring		

Southwire cable pulling equipment sets the industry standard. We've revolutionized these tools to make them faster, safer, and smarter than ever before. With Southwire cable pulling equipment on your jobsite, you can see an increase in safety, efficiency, and profitability.



MAXIS® XD10 EXTREME DUTY CABLE PULLER





The MAXIS® XD10 EXTREME duty cable puller is designed to get the job done, thriving in the most extreme pulling conditions. The XD10 allows you to pull faster and safer up to 10,000 lbs.

- Smooth Elevation Control: Operates with handle or 18V cordless drill helping to eliminate any lifting
- Pulls up to 10 ft. of extra wire without extending the boom
- · Gear reducer design allows for increased efficiency, durability, and power while maintaining low operating temperature
- 10,000 lb. peak pulling force with a continuous pulling rate of 7,000 lbs.
- Conduit adapter sizes 2" 4" included, 5" & 6" adapters sold separately
- Self Contained: ready to pull with no need for additional parts or equipment for set up
- Single person set up and operation: Quickly adapts from underground to overhead pulls
- Collapsible down to 40"H x 26"W x 70"L to fit through standard doorways and ease of transport



SPECIFICATIONS

MODEL #	STOCK #	DESCRIF	PTION		
XD10	XD10 59190402		MAXIS® XD10 EXTREME Duty Cable Puller		
HEIGHT	LENGTH	WIDTH	WEIGHT	WARRANTY	
40"	70"	26"	598 lb.	1 year	
CAPACITY					
Pulling Speed Low:			Pulling Speed High:		
at 2,000 lb.	11 feet per minute		at 2,000 lb.	21 feet per minute	
at 4,000 lb.	10 feet per minute		at 4,000 lb.	18 feet per minute	
at 6,000 lb.	9 feet per minute		_	_	
at 8,000 lb.	8 feet per minute		-	-	
at 10,000 lb.	7 feet per minute		_	_	

XD10 BOLT DOWN ADAPTER



Floor mount adapter for XD10.

- Easily attaches to the XD10
- Does not require disassembly of cable puller
- Simple bolt down adapter for when overhead pulling is required

MODEL #	STOCK #	DESCRIPTION			
XD10BD	59727001	Maxis® XD10 Bolt Down Kit			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
XD10BD	18"	14"	16"	35 lb.	

MAXIS® 6K CABLE PULLER





A 6,000 pound cable puller that sets up in less than 2 minutes.

- . One person, 2 minute set up
- 2 pulling speeds: 12 feet per minute on low (at no load) and 44 feet per minute on high (at no load)
- · Quickly adapts from underground to overhead pulls
- No need to bolt to the ground on most pulls
- 6,000 lb. peak capacity with continuous rating of 3,500 lb. on low
- · Can adapt to virtually any wire pull
- Can be anchored to most trucks' standard 2" receiver hitch
- Able to pull up to 9 ft. of wire out of the conduit
- Includes 5 conduit adapters 2" 4" Included, 5" and 6" sold separately
- · Includes puller cart with tool bag

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION			
M6K-M	57648501	MAXIS® 6K (with motor) - includes conduit adapters 2" - 4" and PC100			
M6K	57142901	MAXIS® 6K (no motor) - includes conduit adapters 2" - 4" and PC100			
PC100	56829601	Puller cart for M3K and M6K pullers			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
M6K-M	45"	21"	20"	194.5 lb.	
PC100	50"	21"	17.5"	40 lb.	

Milwaukee, Super Hawg, Hole Hawg are trademarks, service marks, or trade names of Milwaukee Electric Tool Corporation ("Milwaukee Electric Tool Corporation's Intellectual Property").



MAXIS® 3K CABLE PULLER



A high speed, lightweight 3,000 lb. cable puller. Southwire now offers the M3K-BAT, your complete solution for a truly cordless cable pulling experience. Eliminate the need to be near an outlet or having to run long extension cords on the jobsite which can create trip hazards. No additional hardware is required as you will use the pre-existing hardware and included hex nuts to assemble the M3K-BAT.

- · One person, 2 minute set up
- 2 pulling speeds: 25 feet per minute on low (at no load) and 100 feet per minute on high (at no load)
- · Quickly adapts from underground to overhead pulls
- . No need to bolt to the ground on most pulls
- Able to pull up to 8 ft. of wire out of the conduit
- 3,000 lb. peak capacity with continuous rate of 1,500 lb. on low
- Can adapt to virtually any wire pull
- Can be anchored to most trucks' standard 2" receiver hitch
- Includes 8 conduit adapters: 2" 4"
- · Puller cart with tool bag
- Completely cordless cable puller. No outlet? No problem!
- No additional hardware required.
- One person, two minute setup to operate.
- 12.0 AH capacity for extended run life.

SPECIFICATIONS



MODEL #	STOCK #	DESCRIPTION			
МЗК-М	57648401	MAXIS® 3K (with motor) - includes conduit adapters 1" - 4" and PC100			
M3K-BAT	65242040	Includes Conduit adapters 1"-4", PC100, and LVFS-01 protective footswitch			
мзк	57143101	MAXIS® 3K (no motor) - includes conduit adapters 1" - 4" and PC100			
PC100	56829601	Puller cart for M3K and M6K pullers			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
M3K-M	45"	20"	20"	148.5 lb.	
M3K-BAT	45"	20"	20"	148.5 lb.	
PC100	50"	21"	17.5"	40 lb.	

Milwaukee, Super Hawg, Hole Hawg are trademarks, service marks, or trade names of Milwaukee Electric Tool Corporation ("Milwaukee Electric Tool Corporation's Intellectual Property").



MAXIS® XD1 CABLE PULLER



Safer, faster, and more efficient way to pull low voltage, branch home runs, lighting cables, and small circuit sized wires.

- · Continuous pulling up to 600 lbs.
- · Lightweight and portable
- · One person setup and operation
- · Accepts most commercial 18V cordless drills
- Removable capstan to facilitate polyline removal
- Expandable length up to 34.5 inches
- · Polyline pin on capstan to prevent slippage during the pull
- · Anodized for corrosion resistance
- Field replaceable chuck adapter
- · 600 lbs of constant pulling force with 1000 lbs peak pulling force

MODEL #	STOCK #	DESCRIPTION			
XD1	65090901	Maxis® XD1 Cable Puller			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
XD1	8.75"	8"	28.5''	8.8 lb.	







XDTM EXTREME DUTY TENSION MONITOR





10,000 lb., in-line tension monitor.

- Working load: 10,000 lbs
- Top handle for easy handling
- Large, soft touch button controls
- Usb port for easy data extraction
- · Back lit screen allows for easy viewing
- Anodized aluminum frame for durability
- Tie-off slots
- Covers full range of rope sizes
- Built-in battery for long life
- Custom roller case
- 5 roller design means one calibration
- No disassembly for rope insertion

MODEL #	STOCK #	DESCRIPTION		
XDTM	65111501	Extreme Duty Tension Monitor - 10,000 lbs.		
	HEIGHT	WIDTH	DEPTH	WEIGHT
XDTM	10.50"	20.50"	7.50"	41 lbs.







MAXIS® CABLE FEEDER





Designed and built specifically to accommodate Southwire SIM*pull*™ wire, the Maxis® Cable Feeder is a revolutionary way to feed wire quickly and efficiently.

- Designed and built specifically to accommodate Southwire SIMpull™ wire
- Quick 1 person, 2 minute set up and operate
- Forward and reverse, variable speed, and feeds up to 30' per minute
- May be used with Triggers® Safety system for simultaneous feeder/puller control
- Easily adjust wire tension, even during operation
- Feeds wire sizes from 1/2" 3 1/2" cable
- Solid rubber tires and swivel casters that will never go flat for easy job site maneuverability
- Digital footage meter allows easy monitoring of approximate conductor length being fed
- Uses grooved roller design with increased surface area for greater traction force (no pneumatic tires)
- · Dual anchoring mechanism
- Maximum traction force: single conductor 800 lb., 4 SIMpull™
 THHN 500 MCM conductors 1,600 lb. capacity
- Cable capacity: 8 x 250 MCM, 6 x 500 MCM, 5 x 750 MCM

MODEL #	STOCK #	DESCRIPTION			
MCF01	58133301	MAXIS® Cable Feeder			
FB-01	63159401	Triggers Adapter			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
MCF01	35"	26"	44"	366 lb.	
FB-01	2.5"	4"	12"	2 lb.	







TRIGGERS® WIRELESS SAFETY SWITCH SYSTEM



Safety system designed to control the input power of any piece of jobsite equipment.

- · Works with all brands of electrically driven equipment
- · Saves time by avoiding unnecessary stops and restarts
- . High visibility LED status lights
- . Monitors amperage draw indicating when to switch puller to low speed
- Triggers® Wireless safety switch system is UL and FCC certified and carries an IP55 rating
- · Foot controls contain dual redudant activation switches
- Military grade 3.4 amps per hour lithium ion battery packs
- · Handheld remotes can control pull from any location
- High range: communicates up to 1500' between walls and 1.5 miles line of sight



SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
TSS01	59713201	Triggers® Wireles	s Safety Switch Sys	stem
	HEIGHT	WIDTH	DEPTH	WEIGHT
TSS01	12.54"	21.5"	16.42"	30 lb.

LOW VOLTAGE FOOT SWITCH



- · Works with all brands of electrically driven equipment
- · Shuts off equipment when over amperage condition is indicated
- Monitors for under voltage condition which can cause an over amperage condition
- . Bright LED lights for easy viewing in bright sunlight
- · Redundant switches for added reliability
- Impact resistant metal construction
- · Low voltage indicator light for detecting low voltage situations
- · Built-in over amperage protection to protect equipment and motors

MODEL #	STOCK #	DESCRIPTION				
LVFS01	64602801	Low Voltage Foot Switch				
	HEIGHT	WIDTH	DEPTH	WEIGHT		
LVFS01	4.25"	6.25"	12.25"	4 lb.		

SIM*pull*™ CABLE GUIDE SYSTEM




Integrated guidance system allowing wire and cable to be routed from a reel into a conduit or cable tray without human intervention.

- Designed to eliminate the manual handling of service and feeder conductors during wire pulls
- · Completely customizable for any wire and cable installation
- · Minimizes labor effort during installation
- · Reduces the risk of jobsite injuries
- · Specialized storage cart for ease of transportation
- · Roller guides direct and protect wire and cable along any desired path
- Universal clamps attach the system to the reel jacks, switch gear or panel box

MODEL #	STOCK #	DESCRIPTIO	N			
CGS01	59893101	SIM <i>pull</i> ™ Cable Guide System				
	HEIGHT	WIDTH	DEPTH	WEIGHT		
CGS01	43"	25"	67"	300 lb.		







TRIPODS

P3T01 P6T02



M3K and M6K Tripods attach to MAXIS® cable pullers to make underground wire pulls simple and easy.

- Easily attaches to the M3K or M6K cable pullers
- Helps when pulling from transformer pads, vaults and meter bases
- · Setup in two minutes
- · Helps to pull out extra wire

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION	
P3T01	56822201	Tripod for MAXIS® 3K	
P6T02	56829401	TRIPOD FOR MAXIS® 6K	
MODEL #	SIZE		WEIGHT
P3T01	Adjustable heigh	nt: 3ft - 6ft Adjustable leg width: 13in - 50in	43 lb.
P6T02	Adjustable heigh	nt: 3ft - 6ft Adjustable leg width: 13in - 50in	45 lb.

Milwaukee, Super Hawg, Hole Hawg are trademarks, service marks, or trade names of Milwaukee Electric Tool Corporation ("Milwaukee Electric Tool Corporation's Intellectual Property").







QWIKROPE®



An innovative, high performance pulling rope that is UV resistant, lightweight, and ultra low stretch for all of your feeder and circuit wire needs.

- · High performance pulling rope made from ultra high molecular weight polyethylene fibers
- 12 Strand single braided 9/16" pulling rope with a breaking strength of 32,000 lb., pound for pound stronger than steel
- 2 Sizes for all your circuit wire pulls: 1/8" pulling rope with 1,100 lb. of breaking strength, and 1/4" pulling rope with 7,500 lb. of breaking strength
- · 24% reduction in the coefficient of friction, as compared to traditional pulling ropes
- Dual factory installed pulling eyes
- · Does not absorb water, no rope rot
- Need only one size rope (9/16") for feeder conductor that pulls up to 10,000 pounds
- 1/8" QWIKrope® can easily be vacuumed into any conduit run up to 290 ft.
- 9/16" QWIKrope® recommended for use with all MAXIS® cable pullers

MODEL #	STOCK #	DIAMETER	LENGTH	AVG. BREAKING STRENGTH	TOTAL WEIGHT
SPR183	58387401	1/8"	300 ft.	1,100 lb.	2.5 lb.
SPR186	64865701	1/8"	600 ft.	1,100 lb.	5 lb.
SPR143	58387501	1/4"	300 ft.	7,500 lb.	6.5 lb.
SPR146	58526301	1/4"	600 ft.	7,500 lb.	11 lb.
SPR963	58305601	9/16"	300 ft.	32,000 lb.	26 lb.
SPR966	58305701	9/16"	600 ft.	32,000 lb.	52 lb.
SPR969	58305801	9/16"	900 ft.	32,000 lb.	77 lb.
SPR9612	58305901	9/16"	1,200 ft.	32,000 lb.	103 lb.

STRAIGHT AND SWIVEL CLEVISES



Connects pulling head and pulling rope to eliminate winding and tangling of rope and wire during cable pulls.

MS158

- Swivel diameter 1 5/8"
- Maximum rope size: 1"
- · Designed to pass over sheaves, pulleys and rollers
- Pin roller design added for larger diameter rope and for added strength by evenly spreading load pressure

MS114

- Swivel diameter 1 1/4"
- Maximum rope size: 5/8"
- Designed to pass over sheaves, pulleys and rollers
- Pin roller design added for larger diameter rope and for added strength by evenly spreading load pressure

RC114

- Clevis diameter 1 1/4"
- Maximum rope size: 5/8"
- · Connects to cable grip and pulling rope
- · Designed to pass over sheaves, pulleys and rollers

RC158

- Clevis diameter 1 5/8"
- Maximum rope size: 1"
- Connects to cable grip and pulling rope
- · Designed to pass over sheaves, pulleys and rollers

MODEL #	STOCK #	DESCRIPTION			
MS158	57178001	10,00	0 LB Swivel Clevis		
MS114	57178101	6,000	D LB Swivel Clevis		
RC114	56830601	6,000	LB Straight Clevis		
RC158	56830701	10,000 LB Straight Clevis			
HEIGHT	WIDTH	DEPTH	WEIGHT		
4"	4"	4"	2 lbs.		
4"	4"	4"	1 lb.		
2"	2"	4" 1 lb.			
2"	2"	4" 1 lb.			

DOUBLE BRAIDED PULLING ROPE



Cable pulling rope designed for high breaking strength. The double braid weave provides enhanced strength and increased pulling capability.

- · Polyester double braid
- · High strength

SPECIFICATIONS

MODEL #	STOCK #	DIAMETER	LENGTH	AVG. BREAKING STRENGTH	TOTAL WEIGHT
P-963	56823501	9/16"	300 ft.	14,000 lb.	50 lb.
P-966	56823601	9/16"	600 ft.	14,000 lb.	75 lb.
P-583	56823701	5/8"	300 ft.	18,000 lb.	63 lb.
P-586	56823901	5/8"	600 ft.	18,000 lb.	85 lb.
P-786	56824001	7/8"	600 ft.	31,000 lb.	240 lb.
P-789	57791301	7/8"	900 ft.	31,000 lb.	269 lb.
P-7812	56824101	7/8"	1200 ft.	31,000 lb.	298 lb.

HIGH TENSILE STRENGTH QWIKLINE™ POLY LINE



WE'VE GOT IT MADE IN AMERICA™ Tangle resistant poly line for light duty cable or rope pulling applications.

- · Ready-to-use storage containers quickly dispense a tangle free line
- · Line is resistant to rot and mildew
- · Used to pull electrical and communication wire
- · 210 lb. tensile strength
- · Made in the USA

MODEL #	STOCK #	DESCRIPTION					
PL6500	58280540	QWIKline™ I	POLY LINE 650	00' 210 lb Tens	ile Strength		
PL2200	65130440	QWIKline™ I	POLY LINE 220	00' 500 lb Tens	ile Strength		
PL500	58280640	QWIKline™ I	POLY LINE 500)' 210 lb Tensilo	e Strength		
	HEIGHT	WIDTH	DEPTH	WEIGHT	TENSILE STRENGTH		
PL6500	13"	11"	13"	11.3 lb.	210 lb.		
PL2200	13"	11"	11"	8.0 lb.	500 lb.		
PL500	7.9"	3"	8"	0.5 lb.	210 lb.		

CONDUIT MEASURING TAPE

SWCMT160-3000S




The conduit measuring tape measures 3,000 ft. and has easy-to-read markings in sequential, one-foot increments.

- · Provides quick and accurate measurement of conduit runs
- · Printed with accurate sequential footage markings
- · Will not rot or mildew

MODEL #	STOCK #	DESCRIPTION	PALLET QUANTITY	LENGTH (FT.)	WIDTH (IN.)	TENSILE STRENGTH (LBS.)
SWCMT160-3000S	64584901	Conduit Measuring Tape 160-LB x 3000-FT Spool	144	3000	3/16	160
SWMT400-4500P	64585001	QWIK <i>tape</i> ™ 400-LB x 4500-FT Bucket	36	4500	3/16	400
SWMT1250-3000S	64585101	QWIK <i>tape</i> ™ 1250-LB x 3000-FT Spool	36	3000	1/2	1250
SWQT1250-500S	65128740	QWIK <i>tape</i> ™ 1250-LB x 500-FT Spool	128	500	1/2	1250
SWQT1250-1000S	65128840	QWIK <i>tape</i> ™ 1250-LB x 1000-FT Spool	128	1000	1/2	1250
SWQT1250-1500S	65128940	QWIK <i>tape</i> ™ 1250-LB x 1500-FT Spool	96	1500	1/2	1250
SWQT1250-5000S	65129040	QWIK <i>tape</i> ™ 1250-LB x 5000-FT Spool	18	5000	1/2	1250
SWDQT1250-3000S	65129140	QWIK <i>tape</i> ™ 1250-LB x 3000-FT Spool - DETECTABLE	36	3000	1/2	1250
SWMT1800-3000S	64585201	QWIK <i>tape</i> ™ 1800-LB x 3000-FT Spool	36	3000	5/8	1800
SWQT1800-500S	65129240	QWIK <i>tape</i> ™ 1800-LB x 500-FT Spool	128	500	5/8	1800
SWQT1800-1000S	65129340	QWIK <i>tape</i> ™ 1800-LB x 1000-FT Spool	128	1000	5/8	1800
SWQT1800-1500S	65129440	QWIK <i>tape</i> ™ 1800-LB x 1500-FT Spool	96	1500	5/8	1800
SWQT1800-5000S	65129540	QWIK <i>tape</i> ™ 1800-LB x 5000-FT Spool	12	5000	5/8	1800
SWDQT1800-3000S	65129640	QWIK <i>tape</i> ™ 1800-LB x 3000-FT Spool - DETECTABLE	36	3000	5/8	1800
SWMT2500-3000S	64585401	QWIK <i>tape</i> ™ 2500-LB x 3000-FT Spool	36	3000	3/4	2500
SWQT2500-500S	65129740	QWIK <i>tape</i> ™ 2500-LB x 500-FT Spool	96	500	3/4	2500
SWQT2500-1000S	65129840	QWIK <i>tape</i> ™ 2500-LB x 1000-FT Spool	96	1000	3/4	2500
SWQT2500-1500S	65130040	QWIK <i>tape</i> ™ 2500-LB x 1500-FT Spool	64	1500	3/4	2500
SWQT2500-5000S	65130140	QWIK <i>tape</i> ™ 2500-LB x 5000-FT Spool	12	5000	3/4	2500
SWDQT2500-3000S	65130340	QWIK <i>tape</i> ™ 2500-LB x 3000-FT Spool - DETECTABLE	36	3000	3/4	2500
PL6500	58280540	QWIK <i>line</i> ™ 210-LB x 6500-FT Bucket	36	6500	N/A	210
PL500	58280640	QWIK <i>line</i> ™ 210-LB x 500-FT Canister	N/A	500	N/A	210
PL2200	65130440	QWIK <i>line</i> ™ 500-LB x 2200-FT Bucket	36	2200	N/A	500

MAXIS® GRIPS PULLING HEADS




The MAXIS® grips pulling heads are a dual lock pulling system that uses both a cam lock head and a double braided wire to quickly secure cable to rope without the fear of losing a conductor. These pulling heads provide increased efficiency with 2 minute head preparation.

- Rated at 4,000 lbs. per conductor.
- Holds securely to NO-LUBE® wire
- Disconnect wire from pulling heads in 2 minutes without cutting the wire
- · No cutting, stripping or weaving of wire to make pulling head
- · Easily moves through conduit and around 90° bends
- Staggered lengths for easier movement
- Keeps pulling head tight for easier movement through conduit

SPECIFICATIONS					LING CKET		DPE IVEL	CARRYING BAG	DOUBLE LOCKING HEAD	
MODEL #	STOCK #	MAXIS GRIPS	GRIPS	WIRE	MED.	LRG.	LRG.	SML.		
GP110	56822701	Complete Set	Complete Set	1/0 - 750MCM	Х	Х	Х	Х	Х	N/A
GP00AA	56822801	Group AA	4 Grips	1/0 - 4/0						N/A
GP101A	56822901	Group A	4 Grips	3/0 - 4/0				Х	Х	Х
GP102B	56823001	Group B	4 Grips	250 - 350MCM	Х			Х	Х	Х
GP103C	56823101	Group C	4 Grips	400 - 500MCM		Х	Х		Х	Х
GP104D	56823201	Group D	4 Grips	600 - 750MCM		Х	Χ	·	Х	Х

SIM*pull* **HEAD® PULLING DEVICE**



Available in sizes from 8 AWG to 1000 KCMIL the SIM*pull* Head® pulling device eliminates the need to make up a pulling head on the job site and reduces waste.

- Factory and Field installable pulling grip
- Eliminates the need to make up a pulling head on the job site and reduces waste
- Low profile head eliminates the problem of the head not fitting in the conduit or around a tight turn
- · Saves time making pulling heads
- Patented gripping system factory installed conductors guaranteed not to pull loose during your pull
- Available in 6", 12", 18", 24", and 30" staggered lengths

DESCRIPTION	AVAILABLE IN
8 AWG SIM <i>pull</i> Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
6 AWG SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
4 AWG SIM <i>pull</i> Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
3 AWG SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
2 AWG SIM <i>pull</i> Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
1 AWG SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
1/0 AWG SIM pull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
2/0 AWG SIM pull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
3/0 AWG SIM pull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
4/0 AWG SIM pull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
250 KCMIL SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
300 KCMIL SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
350 KCMIL SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
400 KCMIL SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
500 KCMIL SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
600 KCMIL SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
700 KCMIL SIMpull Head® Pulling Device	Available in 6", 12", 18", 24", & 30" staggered lengths
750 KCMIL SIM <i>pull</i> Head® Pulling Device	Available in 9", 15", 21", 27", & 33" staggered lengths
900 KCMIL SIMpull Head® Pulling Device	Available in 9", 15", 21", 27", & 33" staggered lengths
1000 KCMIL SIMpull Head® Pulling Device	Available in 9", 15", 21", 27", & 33" staggered lengths

^{*}Individual SIMpul/ Head® Pulling Device model #'s begins with SPH. Visit www.southwire.com for full producta listing.

BASKET GRIPS



Southwire's basket grips will save you time by eliminating cutting, stripping or weaving to make your own pulling head. It features a durable galvanized weather-resistant steel mesh that will not corrode and comes in a variety of sizes to fit your application.

- Flexible/Low-Profile
- Reusable/Durable
- Galvanized for Corrosion/Weather Resistance

MODEL #	UPC	STOCK #	DESCRIPTION	WORKING LOAD LBS.	CABLE DIAMETER RANGER
JBG-024	0-32886-69795-1	65017301	Junior Basket Grip 0.19" - 0.24"	Max Rated Capacity: 80 lbs.	0.19" - 0.24"
JBG-036	0-32886-69796-8	65017401	Junior Basket Grip 0.25" - 0.36"	Max Rated Capacity: 90 lbs.	0.25" - 0.36"
JBG-049	0-32886-69797-5	65017501	Junior Basket Grip 0.37" - 0.49"	Max Rated Capacity: 180 lbs.	0.37" - 0.49"
JBG-061	0-32886-69798-2	65017701	Junior Basket Grip 0.50" - 0.61"	Max Rated Capacity: 260 lbs.	0.50" - 0.61"
JBG-074	0-32886-69799-9	65017801	Junior Basket Grip 0.62" - 0.74"	Max Rated Capacity: 390 lbs.	0.62" - 0.74"
JBG-099	0-32886-69800-2	65017901	Junior Basket Grip 0.75" - 0.99"	Max Rated Capacity: 560 lbs.	0.75" - 0.99"
JBG-124	0-32886-69801-9	65018001	Junior Basket Grip 1.00" - 1.24"	Max Rated Capacity: 780 lbs.	1.00" - 1.24"
LBG-061	0-32886-69802-6	65018101	Light Duty Basket Grip 0.50" - 0.61"	Max Rated Capacity: 560 lbs.	0.50" - 0.61"
LBG-074	0-32886-69803-3	65018201	Light Duty Basket Grip 0.62" - 0.74"	Max Rated Capacity: 560 lbs.	0.62" - 0.74"
LBG-099	0-32886-69804-0	65018301	Light Duty Basket Grip 0.75" - 0.99"	Max Rated Capacity: 800 lbs.	0.75" - 0.99"
LBG-124	0-32886-69805-7	65018501	Light Duty Basket Grip 1.00" - 1.24"	Max Rated Capacity: 1360 lbs.	1.00" - 1.24"
LBG-149	0-32886-69806-4	65018601	Light Duty Basket Grip 1.25" - 1.49"	Max Rated Capacity: 1360 lbs.	1.25" - 1.49"
LBG-199	0-32886-69807-1	65018701	Light Duty Basket Grip 1.50" - 1.99"	Max Rated Capacity: 1360 lbs.	1.50" - 1.99"
LBG-249	0-32886-69808-8	65018801	Light Duty Basket Grip 2.00" - 2.49"	Max Rated Capacity: 1700 lbs.	2.00" - 2.49"
LBG-299	0-32886-69809-5	65018901	Light Duty Basket Grip 2.50" - 2.99"	Max Rated Capacity: 2120 lbs.	2.50" - 2.99"
LBG-349	0-32886-69810-1	65019001	Light Duty Basket Grip 3.00" - 3.49"	Max Rated Capacity: 2940 lbs.	3.00" - 3.49"
LBG-399	0-32886-69811-8	65019101	Light Duty Basket Grip 3.5" - 3.99"	Max Rated Capacity: 2940 lbs.	3.5" - 3.99"
SHBG-061	0-32886-69812-5	65019301	Short Basket Grip 0.50" - 0.61"	Max Rated Capacity: 900 lbs.	0.50" - 0.61"
SHBG-074	0-32886-69813-2	65019401	Short Basket Grip 0.62" - 0.74"	Max Rated Capacity: 1120 lbs.	0.62" - 0.74"
SHBG-099	0-32886-69814-9	65019501	Short Basket Grip 0.75" - 0.99"	Max Rated Capacity: 1360 lbs.	0.75" - 0.99"
SHBG-149	0-32886-69815-6	65019601	Short Basket Grip 1.00" - 1.49"	Max Rated Capacity: 1920 lbs.	1.00" - 1.49"
SHBG-199	0-32886-69816-3	65019701	Short Basket Grip 1.50" - 1.99"	Max Rated Capacity: 3280 lbs.	1.50" - 1.99"
SHBG-249	0-32886-69817-0	65019801	Short Basket Grip 2.00" - 2.49"	Max Rated Capacity: 3700 lbs.	2.00" - 2.49"
SHBG-299	0-32886-69818-7	65019901	Short Basket Grip 2.50" - 2.99"	Max Rated Capacity: 4900 lbs.	2.50" - 2.99"
SHBG-349	0-32886-69819-4	65020101	Short Basket Grip 3.00" - 3.49"	Max Rated Capacity: 4900 lbs.	3.00" - 3.49"
SHBG-399	0-32886-69820-0	65020201	Short Basket Grip 3.50" - 3.99"	Max Rated Capacity: 6200 lbs.	3.50" - 3.99"
STBG-099	0-32886-69821-7	65020301	Standard Basket Grip 0.75" - 0.99"	Max Rated Capacity: 1360 lbs.	0.75" - 0.99"
STBG-149	0-32886-69822-4	65020401	Standard Basket Grip 1.00" - 1.49"	Max Rated Capacity: 1920 lbs.	1.00" - 1.49"
STBG-199	0-32886-69823-1	65020501	Standard Basket Grip 1.50" - 1.99"	Max Rated Capacity: 3280 lbs.	1.50" - 1.99"
STBG-249	0-32886-69824-8	65020601	Standard Basket Grip 2.00" - 2.49"	Max Rated Capacity: 3700 lbs.	2.00" - 2.49"
STBG-299	0-32886-69825-5	65020701	Standard Basket Grip 2.50" - 2.99"	Max Rated Capacity: 4900 lbs.	2.50" - 2.99"
STBG-349	0-32886-69826-2	65020801	Standard Basket Grip 3.00" - 3.49"	Max Rated Capacity: 4900 lbs.	3.00" - 3.49"

BASKET GRIPS CONTINUED

MODEL #	UPC	STOCK #	DESCRIPTION	WORKING LOAD LBS.	CABLE DIAMETER RANGER
STBG-399	0-32886-69827-9	65020901	Standard Basket Grip 3.50" - 3.99"	Max Rated Capacity: 6200 lbs.	3.50" - 3.99"
KBG-061	0-32886-69828-6	65021001	K- Basket Grip 0.50" - 0.61"	Max Rated Capacity: 1120 lbs.	0.50" - 0.61"
KBG-074	0-32886-69829-3	65021101	K- Basket Grip 0.62" - 0.74"	Max Rated Capacity: 1360 lbs.	0.62" - 0.74"
KBG-099	0-32886-69830-9	65021201	K- Basket Grip 0.75" - 0.99"	Max Rated Capacity: 1920 lbs.	0.75" - 0.99"
KBG-149	0-32886-69831-6	65021301	K- Basket Grip 1.00" - 1.49"	Max Rated Capacity: 3280 lbs.	1.00" - 1.49"
KBG-199	0-32886-69832-3	65021401	K- Basket Grip 1.50" - 1.99"	Max Rated Capacity: 3280 lbs.	1.50" - 1.99"
KBG-249	0-32886-69833-0	65021501	K- Basket Grip 2.00" - 2.49"	Max Rated Capacity: 5440 lbs.	2.00" - 2.49"
KBG-299	0-32886-69834-7	65021601	K- Basket Grip 2.50" - 2.99"	Max Rated Capacity: 6600 lbs.	2.50" - 2.99"
KBG-349	0-32886-69835-4	65021701	K- Basket Grip 3.00" - 3.49"	Max Rated Capacity: 8200 lbs.	3.00" - 3.49"
KBG-399	0-32886-69836-1	65021901	K- Basket Grip 3.50" - 3.99"	Max Rated Capacity: 9600 lbs.	3.50" - 3.99"
KBG-449	0-32886-69837-8	65022001	K- Basket Grip 4.00" - 4.49"	Max Rated Capacity: 9600 lbs.	4.00" - 4.49"
KBG-499	0-32886-69838-5	65022101	K- Basket Grip 4.50" - 4.99"	Max Rated Capacity: 9600 lbs.	4.50" - 4.99"
KBG-599	0-32886-69839-2	65022201	K- Basket Grip 5.00" - 5.99"	Max Rated Capacity: 9600 lbs.	5.00" - 5.99"
SMBG-061	0-32886-69851-4	65023601	Split Mesh Basket Grip 0.50" - 0.61"	Max Rated Capacity: 300 lbs.	0.50" - 0.61"
SMBG-074	0-32886-69852-1	65023701	Split Mesh Basket Grip 0.62" - 0.74"	Max Rated Capacity: 360 lbs.	0.62" - 0.74"
SMBG-099	0-32886-69853-8	65023801	Split Mesh Basket Grip 0.75" - 0.99"	Max Rated Capacity: 440 lbs.	0.75" - 0.99"
SMBG-124	0-32886-69854-5	65023901	Split Mesh Basket Grip 1.00" - 1.24"	Max Rated Capacity: 680 lbs.	1.00" - 1.24"
SMBG-149	0-32886-69855-2	65024001	Split Mesh Basket Grip 1.25" - 1.49"	Max Rated Capacity: 900 lbs.	1.25" - 1.49"
SMBG-174	0-32886-69856-9	65024101	Split Mesh Basket Grip 1.50" - 1.74"	Max Rated Capacity: 1160 lbs.	1.50" - 1.74"
SMBG-199	0-32886-69857-6	65024301	Split Mesh Basket Grip 1.75" - 1.99"	Max Rated Capacity: 1520 lbs.	1.75" - 1.99"
SMBG-249	0-32886-69858-3	65024401	Split Mesh Basket Grip 2.00" - 2.49"	Max Rated Capacity: 1800 lbs.	2.00" - 2.49"
SMBG-299	0-32886-69859-0	65024501	Split Mesh Basket Grip 2.50" - 2.99"	Max Rated Capacity: 2200 lbs.	2.50" - 2.99"
SMBG-349	0-32886-69860-6	65024601	Split Mesh Basket Grip 3.00" - 3.49"	Max Rated Capacity: 2400 lbs.	3.00" - 3.49"
SMBG-399	0-32886-69861-3	65024701	Split Mesh Basket Grip 3.50" - 3.99"	Max Rated Capacity: 2400 lbs.	3.50" - 3.99"
MBG-049	0-32886-69840-8	65022301	Multi-Strength Basket Grip 0.25" - 0.49"	Max Rated Capacity: 1360 lbs.	0.25" - 0.49"
MBG-074	0-32886-69841-5	65022401	Multi-Strength Basket Grip 0.50" - 0.74"	Max Rated Capacity: 2000 lbs.	0.50" - 0.74"
MBG-099	0-32886-69842-2	65022501	Multi-Strength Basket Grip 0.75" - 0.99"	Max Rated Capacity: 2880 lbs.	0.75" - 0.99"
MBG-124	0-32886-69843-9	65022701	Multi-Strength Basket Grip 1.00" - 1.24"	Max Rated Capacity: 4920 lbs.	1.00" - 1.24"
MBG-149	0-32886-69844-6	65022801	Multi-Strength Basket Grip 1.25" - 1.49"	Max Rated Capacity: 6120 lbs.	1.25" - 1.49"
MBG-174	0-32886-69845-3	65022901	Multi-Strength Basket Grip 1.50" - 1.74"	Max Rated Capacity: 6120 lbs.	1.50" - 1.74"
MBG-199	0-32886-69846-0	65023001	Multi-Strength Basket Grip 1.75" - 1.99"	Max Rated Capacity: 9600 lbs.	1.75" - 1.99"
MBG-249	0-32886-69847-7	65023101	Multi-Strength Basket Grip 2.00" - 2.49"	Max Rated Capacity: 9600 lbs.	2.00" - 2.49"
MBG-299	0-32886-69848-4	65023201	Multi-Strength Basket Grip 2.50" - 2.99"	Max Rated Capacity: 9600 lbs.	2.50" - 2.99"
MBG-349	0-32886-69849-1	65023301	Multi-Strength Basket Grip 3.00" - 3.49"	Max Rated Capacity: 9600 lbs.	3.00" - 3.49"
MBG-399	0-32886-69850-7	65023501	Multi-Strength Basket Grip 3.50" - 3.99"	Max Rated Capacity: 9600 lbs.	3.50" - 3.99"













PULLING GRIPS

Flexible leader guides steel tapes through conduit and helps reduce the challenge of pulling wire and cable. Available in two separate grip sizes to meet your pulling requirements.

- . Used to pull wire and cable through walls and conduit
- · Swivel design minimizes cable twisting
- Mesh design holds wire or cable securely during pull
- 100 lb. pulling force capacity
- Available in 1/2" and 3/4" diameters

MODEL #	STOCK #	DESCRIPTION				
WPG3/4	58280801	3/4" Pulling Grip				
WPG1/2	58281001	1/2" Pulling Grip				
	HEIGHT	WIDTH	DEPTH	WEIGHT	DIAMETER	LOAD
WPG3/4	14.25"	0.5"	0.5"	2 oz.	3/4"	100 lb.
WPG1/2	14.25"	0.5"	0.5"	2 oz.	1/2"	100 lb.

INDUSTRIAL GRIPit™ PULLING DEVICE



GRIPit™ Circuit management system can help make every branch circuit and home run pull safer, easier, and more productive.

- · Reusable pulling head
- · No need to strip the wire
- · Low profile head eliminates the problem of the head not fitting in the conduit or around a tight turn
- · Easily attach and remove wires without cutting
- Save time making pulling heads
- . Usable on solid and stranded wires from sizes 14AWG to 10AWG
- Staggered lengths (6", 12", 18", 24", & 30" lengths available)

MODEL #	STOCK #	DESCRIPTION	LANYARD LENGTH
IG-06	64801501	Industrial GRIPit™ 6" Pulling Device	6" length
IG-12	64801601	Industrial GRIPit™ 12" Pulling Device	12" length
IG-18	64801701	Industrial GRIPit™ 18" Pulling Device	18" length
IG-24	64801801	Industrial GRIPit™ 24" Pulling Device	24" length
IG-30	64801901	Industrial GRIPit™ 30" Pulling Device	30" length
IG-KIT	64802001	Industrial GRIPit™ Pulling Device Kit	Staggered lengths (6", 12", 18", 24", & 30" lengths included)







SIM*pull™* GRIPit™ CIRCUIT SIZED PULLING HEAD



The SIM*pull* ™ GRIPit™ circuit sized pulling head can help make every branch circuit and home run pull safer, easier, and more productive.

- · Easily connects to fish tape, string, or rope
- 14 AWG 10 AWG solid or stranded conductors
- · 600 lb pulling force
- · Reusable pulling head for circuit wire
- Easily attach up to 7 wires of 10-14 AWG solid or stranded wires per pulling head
- . No cutting, stripping, taping, or weaving wire to make pulling head

MODEL #	STOCK #	DESCRIPTION		
CSPH1HD	58294505	SIM <i>pull</i> ™ GRIPit™ Circuit Sized Pulling Head		
	WIDTH	DEPTH	WEIGHT	
CSPH1HD	1.5"	0.06"	1.3 oz.	







REEL ROLLERS







With its heavy duty, all welded construction, the RR-SW30 is built to handle 30,000 lbs. and the RR-SW45 is built to handle 45,000 lbs. With convenient fork tubes and lifting eyes, maneuvering the equipment around the jobsite is easy. You can now safely operate the reel roller by standing outside of the wire's path by remotely operating the unit with the foot control and variable speed adjustment. When the job is finished and it is time to store the unit, the RR-SW30 and RR-SW45 will not take up as much room as traditional reel rollers with our new stackability feature. All that is needed for the RR-SW30 is 2" piece of rigid conduit cut to the desired length and installed in the feature. This unit can be stacked 4 units high. For the RR-SW45 all that is needed is a 2.5" piece of rigid conduit cut to the desired length and installed in the feature. This unit can be stacked 3 units high.

- RR-SW30 handles up to 30,000 lbs.
- RR-SW45 handles up to 45,000 lbs.
- Stackable up to 4 units for the RR-SW30 and 3 units for the RR-SW45
- Speed control adjustment
- Foot control for remote operation
- · Heavy duty 10-amp motor
- · Convienent fork tubes on both sides
- . Made in the USA
- · Heavy duty all welded construction

MODEL #	STOCK #	DESCRIPTION
RR-SW30	65241740	30K Reel Roller
RR-SW45	66223940	45K Reel Roller







SIM*pull*™ Guidelt™ CIRCUIT ROUTER

WG01



A wire router for circuit panel and junction boxes.

- · Universal adapter for hands free circuit wire feeding
- Routes circuit wire in enclosures up to 32"
- · Helps to prevent any damage to wire during installation
- · Reduces the need to route circuit wire into a raceway or conduit

MODEL #	STOCK #	DESCRIPTIO	N		
WG01	58387301	SIM <i>pull</i> ™ Guidelt™ Circuit Router			
	HEIGHT	WIDTH	DEPTH	WEIGHT	
WG01	2.5"	7.5"	23"	2 lb.	





TERMINATION

Southwire termination line of tools sets a new industry standard. We've revolutionized these tools to make them faster, safer, and smarter than ever before. With Southwire cable stripping, cutting and crimping tools on your job site you can see an increase in safety, efficiency, and profitability.



TERMINATION

XT CABLE STRIPPER



The XTS-01 cable stripper is made for end and mid-span terminations of 600 volt 1/0 AWG to 1000 KCMIL or outside diameters from .33"-1.284". Works on THHN, XHHW, RHH, RHW, and USE jackets.

- Cutting depth is adjustable to precisely match insulation thickness for fast stripping while eliminating cable scoring
- Adjustable 4" depth gauge provides consistent repeatable strips
- Replaceable, precision razor sharp blade that is safely enclosed within the tool, eliminates stripping cables with a knife
- Capacity: wire 1/0 AWG (.33" in diameter) in size to 1000 KCMIL (approx. 1.284" diameter)

MODEL #	STOCK #	DESCRIPTION		
XTS-01	64984901	XT Cable Stripper		
XTS01-RB	59368901	XTS-01 Cable Stripper Replacement Blade Kit		
	HEIGHT	WIDTH DEPTH WEIGHT		
XTS-01	8.5"	2.5"	2.25"	1.30 lb.
XTS01-RB	1"	3/8"	3/8"	3gm










TERMINATION

XT MINI STRIPPER

XTS02 XTS02RB





- For end termination on THHN/XHHW 600V insulation types
- · Cutting depth is self setting to eliminate cable scoring
- Replaceable blade that is safely enclosed within the housing
- Capacity: Wire sizes #6 AWG through 1/0 AWG


SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION			
XTS02	59894601	XT Mini Stripper			
XTS02RB	59973501	XT Mini Stripper Replacement Blade Kit			
	LENGTH	WIDTH	HEIGHT	WEIGHT	
XTS02	1.2"	1.38"	5"	.38 lb.	
XTS02RB	1/2"	1/4"	5/16"	2.34 gm	



XT CABLE STRIPPER COMBO KIT





MODEL #	STOCK #	DESCRIPTION			
XTC100	59894501	XT Cable Stripper Combo Kit			
	LENGTH	WIDTH	HEIGHT	WEIGHT	
XTC100	10"	10"	3"	2.9 lb.	



We don't just help you bend conduit, we change the way you do it. In addition to offering traditional conduit bending tools, Southwire has designed bending platforms that allow you to bend 1/2" to 2" EMT, IMC, and GRC conduit more efficiently, helping you do more work faster and stay fresh longer.



MAXIS® XTREME™ BENDER

MXB2000



The Maxis® Xtreme™ bender incorporates multiple shoe groups for a lightweight highly transportable bender.

- . Billet Aluminum pendant for increased durability
- · Quick change control cable
- . Compact removeable handle to reduce interference with bends
- · Industry leading 5 year warranty
- . Designed to work with competitor shoe and rollers

MODEL #	STOCK #	DESCRIPTION				
MXB2000	66115140	MAXIS® XTREMET	MAXIS® XTREME™ Bender			
MXB2000R	MXB2000R		MXB2000 with single shoe bending attachments to bend 1/2" to 2" RIGID conduit and pipe			
MXB2000E	MXB2000E	MXB2000 with single shoe bending attachments to bend 1/2" to 2" EMT conduit and pipe				
MXB2000I	MXB2000I	MXB2000 with single shoe bending attachments to bend 1/2" to 2" IMC conduit				
	DEPTH	WIDTH	HEIGHT	WEIGHT		
MXB2000	44"	25"	26"	320 lbs		
MXB2000R	44"	25"	26"	320 lbs		
MXB2000E	44"	25"	26"	320 lbs.		
MXB2000I	44"	25"	26"	320 lbs.		







MAXIS® HYDRAULIC BENDING MACHINE



A complete solution for bending 2.5-4 inch Rigid, IMC and EMT conduit with ergonomic storage and transport cart and 90 degree shoes.

- Most efficient solution for bending 2.5" 4" EMT, IMC, and GRC conduit
- · Easy, safe set-up mast hydraulically raises & locks in seconds
- Fast shoe changes. Long-stroke cylinder requires no extra adjustments when changing shoes
- Less time between bends. Precise cylinder control reduces set-up time
- Consistent, accurate bends. Rigid mast. Precision-machined shoes & follow bars
- Smart, efficient organization color-organized accessories, intelligent storage

MODEL #	STOCK #	DESCRIPTION		
MHB4000	66978340	Complete Hydraulic Conduit Bending Machine for 2.5" - 4" EMT, IMC and GRC pipe		
	DEPTH	WIDTH	HEIGHT	WEIGHT
MHB4000	65"	60"	39.5"	1350 lbs.









BENDMAX™ POWER BENDER



WE'VE GOT IT

MADE IN AMERICA™

Power bender 3/4" - 2" EMT, IMC, GRC conduit.

- · Easily adjustable to ergonomic working height
- 3/4" 2" EMT, IMC/GRC Conduit Bender
- 2 degree leveling adjustment
- Industrial grade DC drive, and electrical components
- · Push cart mounted platform
- · Includes free standing conduit roller support
- Total lock casters
- Programmable spring back incorporated into digital readout
- · Large analog protractor for accurate bends
- · Backlit digital display
- Manual operation in the event of electronics failure
- · Billet aluminum hand pendant
- · Easily replaceable control cable

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION		
PB2000	59840601	Powered Bender 3/4"- 2" EMT,IMC, GRC Conduit		
	DEPTH	WIDTH	HEIGHT	WEIGHT
PB2000	38"	30"	50"	600 lb.

BENDMAX™ COMPACT POWER BENDER





Compact Power Bender for 3/4"- 2" EMT, IMC, GRC Conduit

- Bends 3/4" 2" EMT, IMC/GRC Conduits
- . Double sided shoe for EMT and IMC/GRC Conduit
- · Large analog protractor for accurate bends
- Push cart mounted platform
- · Industrial-grade DC drive and electrical components
- Adjustable squeeze setting for wrinkle-free bends on EMT/IMC conduit
- Durable locking casters
- Fits through finished 30" door frames
- Durable two-position hand pendant
- · Completely assembled, no gang boxes to deal with

MODEL #	STOCK #	DESCRIPTION		CAPACITY
BML2000	64601201	BENDMAX [™] Compact Power Bender		3/4"-2" EMT, IMC, GRC Conduit
	HEIGHT	WIDTH	DEPTH	WEIGHT
BML2000	42.94"	27.125"	29.625"	500 lb.

BEND*STATION*™ COMMON CART WORK STATION

RB1000









BEND*STATION*™ common cart work station.

- . More accurate measurements, bends, and cuts
- Measure, bend, clamp and cut at a comfortable 36" work table height for reduced labor fatigue
- Store up to 900 feet of conduit or strut dependent on size
- Extra shelf for storage of tools and materials
- . Heavy duty casters for easy transportation and mobility
- Requires up to 40% less effort than other mechanical benders
- Built-in 60" ruler for quick and accurate measuring
- Eliminates the need to bend over to get a closer look at hand bends
- . Unique speed vice designed specifically to hold conduit and unistrut, helps make cutting quicker and safer
- . Speeds up the entire bending process up to 30%

MODEL #	STOCK #	DESCRIPTIO	N			
BSCC01	59840701	BENDSTATION™	BENDSTATION™ GRC for 3/4" and 1" GRC and IMC			
RB1000	59840701	BENDSTATION™ for 3/4" and 1" GRC and IMC				
MB1250	64795101	BENDSTATION™	for 1" and 1.25" E	MT		
MB1000	64306901	BENDSTATION™	for 3/4" and 1" EN	MT		
MB750	58315201	BENDSTATION™	for 1/2" and 3/4"	EMT		
	LENGTH	WIDTH	HEIGHT	WEIGHT		
BSCC01	69"	29"	38.5"	170 lb.		
RB1000	69"	29"	38.5	180 lb.		
MB1250	69"	29"	38.5	185 lb.		
MB1000	69"	29"	38.5	150 lb.		
MB750	69"	29"	38.5	132 lb.		
MODEL #	STOCK #	DESCRIPTIO	N	CAPACITY		
MODEL # RBCCH-1000	STOCK # 64316601	DESCRIPTIO Head Kit for 3/4" GRC and IMC	- 1"	CAPACITY 3/4" - 1" GRC and IMC		
		Head Kit for 3/4"	- 1"	-		
RBCCH-1000	64316601	Head Kit for 3/4" GRC and IMC Head Kit for 1/2"	- 1"	3/4" - 1" GRC and IMC		
RBCCH-1000 MBCCH-750	64316601 64601001	Head Kit for 3/4" GRC and IMC Head Kit for 1/2" EMT Head Kit for 3/4"	- 1" - 3/4" - 1"	3/4" - 1" GRC and IMC 1/2" - 3/4" EMT		
RBCCH-1000 MBCCH-750 MBCCH-1000	64316601 64601001 64316701	Head Kit for 3/4" GRC and IMC Head Kit for 1/2" EMT Head Kit for 3/4" EMT Head Kit for 1" -	- 1" - 3/4" - 1"	3/4" - 1" GRC and IMC 1/2" - 3/4" EMT 3/4" - 1" EMT		
RBCCH-1000 MBCCH-750 MBCCH-1000	64316601 64601001 64316701 64795301	Head Kit for 3/4" GRC and IMC Head Kit for 1/2" EMT Head Kit for 3/4" EMT Head Kit for 1" - EMT	- 1" - 3/4" - 1" - 1" - 1" - 1" - 1" - 1" - 1" -	3/4" - 1" GRC and IMC 1/2" - 3/4" EMT 3/4" - 1" EMT 1" - 1.25" EMT		
RBCCH-1000 MBCCH-750 MBCCH-1000 MBCCH-1250	64316601 64601001 64316701 64795301	Head Kit for 3/4" GRC and IMC Head Kit for 1/2" EMT Head Kit for 3/4" EMT Head Kit for 1" - EMT WIDTH	- 1" - 3/4" - 1" 1.25"	3/4" - 1" GRC and IMC 1/2" - 3/4" EMT 3/4" - 1" EMT 1" - 1.25" EMT		
RBCCH-1000 MBCCH-750 MBCCH-1000 MBCCH-1250 RBCCH-1000	64316601 64601001 64316701 64795301 LENGTH 9.20"	Head Kit for 3/4" GRC and IMC Head Kit for 1/2" EMT Head Kit for 3/4" EMT Head Kit for 1" EMT WIDTH 17.45"	- 1" - 3/4" - 1" 1.25" HEIGHT 20.80"	3/4" - 1" GRC and IMC 1/2" - 3/4" EMT 3/4" - 1" EMT 1" - 1.25" EMT WEIGHT 80 lb.		

BEND*DOLLY*™ **BENDING PLATFORM**







Mechanical bending platform.

- · Light weight bending platform
- Interchangeable shoe mounting plate
- · Large dolly wheels for easy maneuverability
- Stable bending platform
- Interchangeable EMT shoes and IMC/GRC shoes
- Durable black powder coating for increased corrosion resistance
- Accepts four different Southwire bending shoes
- · Upright storage position

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	CAPACITY
BD1000R	64602501	BEND <i>dolly</i> ™ 3/4 IMC Bender	" - 1" GRC	3/4" - 1" IMC/GRC conduit
BD-01	64601101	BEND <i>dolly</i> ™ Ber	nding Platform	EMT, IMC/GRC bending shoe sizes 1/2" - 1.25"
BD750E	64602301	BEND <i>dolly</i> ™ 1/2 Bender	" - 3/4" EMT	1/2" - 3/4" EMT conduit
BD1000E	64602401	BEND <i>dolly</i> ™ 3/4 Bender	" - 1" EMT	3/4" - 1" EMT conduit
BD1250E	64602401	BEND <i>dolly</i> ™ 1" - Bender	- 1.25" EMT	1" - 1.25" EMT conduit
	LENGTH	WIDTH	HEIGHT	WEIGHT
BD1000R	55"	26"	28.75"	140 lb.
BD-01	55"	26"	28.75	60 lb.
BD750E	55"	26" 28.75		92 lb.
BD1000E	55"	26"	28.75	110 lb.
BD1250E	55"	26"	28.75	145 lb.

BENDING SHOE HEAD KITS

MODEL #	STOCK #	DESCRIPTIO	N	CAPACITY
MBCCH-750	64601001	Head Kit for 1/2"-	-3/4" EMT	1/2"-3/4" EMT
MBCCH-1000	64316701	Head Kit for 3/4-1	I" EMT	3/4"-1" EMT
MBCCH-1250	64795301	Head Kit for 1"-1.	25" EMT	1"-1.25" EMT
RBCCH-1000	64316601	Head Kit for 3/4"-	-1" GRC/IMC	3/4"-1" GRC/IMC
	HEIGHT	WIDTH	DEPTH	WEIGHT
MBCCH-750	14.87"	16.13"	7.60"	32 lb.
MBCCH-1000	16.61"	16.63" 8.70"		49 lb.
MBCCH-1250	15.23"	12.75" 10"		85 lb.
RBCCH-1000	20.80"	17.45"	9.20"	80 lb.

1/2" TO 6" PVC MOTORIZED BENDER

PVCB-06M



6300 watts, 230 VAC, 28 amp PVC bender.

- Durable black powder coating for increased corrosion resistance
- · Solid 6" wheels for easy maneuverability
- Chrome plated reflectors for maximum reflection of infrared energy for a faster bend
- Label includes NEC bending tables
- Bright red indicator light to advise when unit is turned "ON"

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION		
PVCB-06M	64301301	1/2" to 6" PVC Motorized Bender		
	DEPTH	WIDTH	HEIGHT	WEIGHT
PVCB-06M	11.75"	73"	16.5"	81 lb.

1/2" TO 6" PVC BENDER

PVCB-06



6300 watts, 230 VAC, 28 amp PVC bender.

- Durable black powder coating for increased corrosion resistance
- Solid 6" wheels for easy maneuverability
- Chrome plated reflectors for maximum reflection of infrared energy for a faster bend
- Label includes NEC bending tables
- Bright red indicator light to advise when unit is turned "ON"

MODEL #	STOCK #	DESCRIPTION		
PVCB-06	64301201	1/2" to 6" PVC Bender		
	DEPTH	WIDTH	HEIGHT	WEIGHT
PVCB-06	11.75"	73"	16.5"	80 lb.

1/2" TO 4" PVC BENDER

PVCB-04



2400 watts, 120 VAC, 20 amp PVC bender.

- Durable black powder coating for increased corrosion resistance
- Solid 6" wheels for easy maneuverability
- · Chrome plated reflectors for maximum reflection of infrared energy for a faster bend
- Label includes NEC bending tables
- . Bright red indicator light to advise when unit is turned "ON"

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION		
PVCB-04	64301101	1/2" to 4" PVC Bender		
	DEPTH	WIDTH	HEIGHT	WEIGHT
PVCB-04	8.5"	56"	13"	50 lb.

1/2" TO 2" PVC BENDER

PVCB-02



1700 watts, 115 VAC, 15 amp PVC bender.

- Durable black powder coating for increased corrosion resistance
- Chrome plated reflectors for maximum reflection of infrared energy for a faster bend
- Label includes NEC bending tables
- Bright green indicator light to advise when unit is turned "ON"

MODEL #	STOCK #	DESCRIPTION		
PVCB-02	64812201	1/2" to 2" PVC Bender		
	DEPTH	WIDTH HEIGHT WEIGHT		
PVCB-02	32"	10"	11"	19 lb.

PVC HEATING BLANKET



PVCHB-13, PVCHB-30, PVCHB-38 heating blankets.

- . Heats to 300° F
- · Wrap blanket around PVC and easily secure with velcro strap
- . Make bends, offsets or saddles in PVC
- · Compact for easy storage and transport
- Power source: 120 VAC

SPECIFICATIONS

	MODEL #	STOCK #	DESCRIPTION	WORKING LOAD
ſ	PVCHB-13	67589540	PVC Heating Blanket 13"	200 WATT
	PVCHB-30	67589640	PVC Heating Blanket 30"	800 WATT
	PVCHB-38	67589740	PVC Heating Blanket 38"	1300 WATT

PVCHB13



PVCHB30



PVCHB38



PLUG KITS

PVCP-01



Plug kits for PCVB-03/PVCB-06/PVCB-06M.

- Rugged carrying case to store and transport plugs
- Durable long lasting neoprene gaskets
- Twist lock design for easy installation and removal
- · Provides air tight seal
- Prevents conduit from collapsing when heated

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
PVCP-01	643014	2" to 4" Bending Plug Kit
PVCP-02	643016	2" to 6" Bending Plug Kit

PVCP-02





Southwire has developed industry leading tools for electrical contractors, including a comprehensive line of hole making solutions. With tools ranging from cutting dies to the original drill-powered knockout punch, you can make quick, accurate holes every time without the muscle or mess.



MAX PUNCH® XD

MPXD



MPXD-SD



MP-03PRO



Heavy duty knockout punch driver for stainless and mild steel.

- · No hydraulics, no ratcheting, no mess!
- Thread-in/thread-out removable drawstuds (universal to fit most common KO dies)
- Rated to cut 10 gauge mild and stainless steel up to 4"
- Minimum drill recommendations: 18V cordless, equivalent of 550 in. lbs. torque rated

MPXD-SD

INCLUDES:

- MAX PUNCH® XD drive unit
- 1/2" 2" MAX PUNCH® Pro cutting dies (rated for stainless steel)
- 2 drawstuds sizes 3/4" & 7/16"
- Marksman[™] conduit layout tool
- Step drill bit (3/16" 7/8", 2 nut drivers) (7/16")
- · Heavy duty carrying case

MP-03PRO

INCLUDES:

- 2 1/2" 4" MAX PUNCH® Pro cutting dies
- 1 1/8" drawstud
- . Heavy duty carrying case

MODEL#	STOCK #	DETAILS		
MPXD	63159701	MAX PUNC	H® XD: drive	unit only (no case)
MPXD-SD	63159901	MAX PUNCH® XD w/ stainless steel rated dies - 1/2" - 2" set (1 case)		
MP-03PRO	57177201	MAX PUNCH® PRO STAINLESS STEEL 2 1/2" - 4" SET		
MODEL#	LENGTH	WIDTH DEPTH WEIGHT		
MPXD	5.5"	11.5"	4.25"	5.5 lb.
MPXD-SD	16.5"	8.5"	13"	14.5 lb.
MP-03PR0	16.5"	13"	5"	22.5 lb.

MAX PUNCH™ 360 HYDRAULIC KNOCKOUT TOOL

MP360HP



Heavy duty 12-ton hydraulic knockout with 360 degree articulation.

- Full 360 degree articulating head for tight spaces
- · Lightweight aluminum head
- Compact pump with padded handle

SPECIFICATIONS

MODEL#	STOCK #	DETAIL	S		
MP360HP	59159001	MAX PUNC	MAX PUNCH™ 360 DRIVE UNIT ONLY		
MP360SDPR0	58973801	MAX PUNC	MAX PUNCH™ 360 STAINLESS STEEL 1/2" - 2" SET		
MP-03PRO	57177201	MAX PUNCH™PRO STAINLESS STEEL SET 2 1/2" - 4" SET			
MODEL#	LENGTH	WIDTH	DEPTH	WEIGHT	
MP360HP	4.5"	5.25"	3.75"	5.5 lb.	
MP360SDPR0	21"	12"	4"	15 lb.	
MP-03PR0	16.5"	13"	5"	22.5 lb.	

MP360SDPR0





MP-03PRO



MAX PUNCH™ HSP HYDRAULIC STUD PUNCH



4 tools in 1 and is adjustable for 3 5/8" and 6" studs, punches 7/8" or 1 11/32" holes.

- Punches holes in 16 gauge structural steel studs
- · Compact design fits in tight spaces
- · Padded handles provide gripping comfort and greater control
- · Heavy duty carrying case

MODEL #	STOCK #	DESCRIPTIO	N	
MPHSP	58946501	MAX PUNCH™ Hydraulic Stud Punch		
MODEL #	LENGTH	WIDTH	WEIGHT	
MPHSP	17.5"	10.5"	11 lb.	





MAX PUNCH™ MANUAL STUD PUNCH

MSP01



2 tools in 1, punches $\frac{7}{8}$ " and 1 $\frac{11}{32}$ " holes.

- Sizes include 7/8" (22.5mm) & 1-11/32" (34.1mm)
- MAX PUNCH™ Manual Stud Punch is intended to punch round holes in 20 gauge steel studs
- · Lock to keep handle in place when not in use
- · Lightweight punch makes accurate location of holes easier
- Cushioned handle gives more leverage and makes it easier to punch in tight spaces, meaning less operator fatigue and more comfortable handling

MODEL #	STOCK #	DESCRIPTIO	N	
MSP01	57576201	MAX PUNCH™ MA	NUAL STUD PUNCH	
MODEL #	HEIGHT	WIDTH	LENGTH	WEIGHT
MSP01	2.25"	8.55"	18.5"	7.5 lb.



MAX PUNCH™ RATCHET SET WITH 1/2" - 2" CUTTING DIES

MPR-01SD



Flex head ratchet wrench allows for easy maneuverability around obstacles.

- Cuts through 12 gauge mild steel as well as aluminum, fiberglass, and plastics
- Unique 3-point cup cutting surface provides a clean, quick, and easy cut for 1" through 2" dies
- Cup design creates crimping effect on slug for easy removal for 1" through 2" dies
- · Ball bearing draw stud for reduced friction
- Includes Southwire Marksman® (Model # MM01) Conduit Layout Tool
- Includes 1/2", 3/4", 1", 1 1/4", 1 1/2", and 2" dies

MODEL #	STOCK #	DESCRIPTIO	N		
MPR-01SD	58289240	MAX PUNCH™ Ratchet Set with 1/2"-2" Dies			
	HEIGHT	WIDTH	LENGTH	WEIGHT	
MPR-01SD	14.17"	10.43"	2.76"	11.57 lb.	

MAX PUNCH® STAINLESS STEEL CUPS & CUTTERS




Stainless steel cups and cutters.

- Unique 3 point cutting surface provides a cleaner, quicker and easier cut for 1" through 4" dies
- Rated for 10 gauge stainless steel (3.5mm) as well as mild steel, aluminum, fiberglass and plastics
- · Will not bow panel or leave jagged edges
- Crimping effect on slug for easy removal

MODEL #	STOCK #	DESCRIPTION	CONDUIT & PIPE SIZE	ACTUAL HOLE SIZE (IN)	ACTUAL HOLE SIZE (MM)	CAPACITY S.S. GA
MPK050PR0	57174601	MAX PUNCH® Cutter for Stainless Steel 1/2"	1/2"	.89	23	10
MPC50PR0	57176101	MAX PUNCH® Cup for Stainless Steel 1/2"	1/2"	.89	23	10
MPK075PR0	57174701	MAX PUNCH® Cutter for Stainless Steel 3/4"	3/4"	1.12	28	10
MPC75PR0	57176201	MAX PUNCH® Cup for Stainless Steel 3/4"	3/4"	.12	28	10
MPK0100PR0	57174801	MAX PUNCH® Cutter for Stainless Steel 1"	1"	1.36	35	10
MPC100PR0	57176301	MAX PUNCH® Cup for Stainless Steel 1"	1"	1.36	35	10
MPK0125PR0	57174901	MAX PUNCH® Cutter for Stainless Steel 1 1/4"	1 1/4"	1.70	43	10
MPC125PR0	57176401	MAX PUNCH® Cup for Stainless Steel 1 1/4"	1 1/4"	1.70	43	10
MPK0150PR0	57175001	MAX PUNCH® Cutter for Stainless Steel 1 1/2"	1 1/2"	1.95	50	10
MPC150PR0	57176501	MAX PUNCH® Cup for Stainless Steel 1 1/2"	1 1/2"	1.95	50	10
MPK0200PR0	57175101	MAX PUNCH® Cutter for Stainless Steel 2"	2"	2.42	62	10
MPC200PR0	57176601	MAX PUNCH® Cup for Stainless Steel 2"	2"	2.42	62	10
MPK0250PR0	57175301	MAX PUNCH® Cutter for Stainless Steel 2 1/2"	2 1/2"	2.92	74	10
MPC250PR0	57176701	MAX PUNCH® Cup for Stainless Steel 2 1/2"	2 1/2"	2.92	74	10
MPK0300PR0	57175401	MAX PUNCH® Cutter for Stainless Steel 3"	3"	3.55	90	10
MPC300PR0	57176801	MAX PUNCH® Cup for Stainless Steel 3"	3"	3.55	90	10
MPK0350PR0	57175501	MAX PUNCH® Cutter for Stainless Steel 3 1/2"	3 1/2"	4.04	103	10
MPC350PR0	57176901	MAX PUNCH® Cup for Stainless Steel 3 1/2"	3 1/2"	4.04	103	10
MPK0400PR0	57175601	MAX PUNCH® Cutter for Stainless Steel 4"	4"	4.54	115	10
MPC400PR0	57177001	MAX PUNCH® Cup for Stainless Steel 4"	4"	4.54	115	10
MP02PR0*	57177101	Small Die Set 1/2"-2" in case (drive unit not included)	1/2" – 2"	.89-2.42	23-62	10
MP03PR0*	57177201	MAX PUNCH® PRO STAINLESS STEEL SET 2 1/2" - 4"	2 1/2" – 4"	2.92-4.54	74-115	10

MARKSMAN® CONDUIT LAYOUT TOOL

MM01

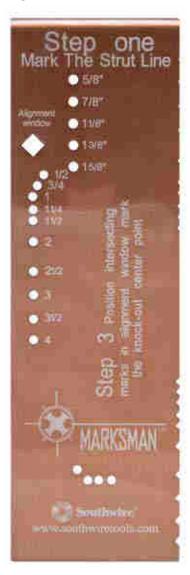

A conduit layout tool that will pinpoint a center knockout in seconds. The Marksman® Layout Tool also features a panel schedule showing the branch circuit number and its corresponding phase.

- · Easy to use
- · No math
- For KO sizes 1/2" to 4"
- · Underground and overhead
- The Southwire Marksman[®] conduit layout tool is constructed of tough durable anodized aluminum
- Markings are etched for maximum durability

MODEL #	STOCK #	DESCRIPT	TION		
MM01	58281940	Marksman Co	Marksman Conduit Layout Tool		
	HEIGHT	WIDTH	DEPTH	WEIGHT	KNOCKOUT SIZES
MM01	6.5"	2"	0.25"	2.5 oz.	1/2" - 4"

DRAW STUDS FOR MAX PUNCH® DRIVE UNITS

XDDS34 PRDS716 PRDS118 MPDS12



MAX PUNCH® PRO DRAW STUDS

- 3/4" Main Draw Stud Stock #64864001 Model #XDDS34
- 7/16" Medium Draw Stud Stock #57717901 Model #PRDS716
- 1 1/8" Large Draw Stud (for 2 1/2" 4" MAX PUNCH® and MAX PUNCH® PRO Dies) Stock #58306101 Model #PRDS118


MAX PUNCH® DRAW STUDS

• 3/4" - Main Draw Stud - Stock #56825901 Model #MPDS12

SPECIFICATIONS

MODEL#	STOCK #	DESCRIPTION	LENGTH	WEIGHT	DIAMETER
XDDS34	64864001	3/4" MAIN DRAW STUD MAX PUNCH® PRO	5"	8.7 oz.	3/4"
PRDS716	57717901	7/16" MEDIUM DRAW STUD - MAX PUNCH® PRO	4.25"	4.6 oz.	7/16" - 3/4"
PRDS118	58306101	LARGE DRAW STUD - 1 1/8" (FOR MILD STEEL OR STAINLESS STEEL LARGE DIES)	4.4"	15.6 oz.	1 1/8"
MPDS12	56825901	1/2" MAIN DRAW STUD - MAX PUNCH®	11.5"	4.4 oz.	15/16"

MANUAL KNOCKOUTS





- Unique 3-point cup cutting surface provides a clean, quick, and easy cut
- · Cup design creates crimping effect on slug for easy removal



MODEL #	STOCK #	DESCRIPTION
KOKIT6	58297840	Manual Knockout Kit
KODRAW1/2	58297940	Knockout Set
KODRAW3/4	58298040	Knockout Set
MODEL #	STOCK #	INCLUDES
KOKIT6	58297840	(4) Maxis® MAX PUNCH® Cups & Cutters 1/2" to 1-1/4", (1) 7/16" Draw Stud, (1) 3/4" Draw Stud
KODRAW1/2	58297940	(1) 1/2" Knockout Draw Stud
KODRAW3/4	58298040	(1) 3/4" Knockout Draw Stud

BI-METAL HOLE SAWS

BMHSKIT9



These bi-metal hole saws are heavy duty and allow for fast cutting of steel, aluminum, brass, wood, plastic, and drywall.

- Increased plug ejection slots for easy removal of cutting materials
- Larger hole saw depth limits blocked ejection slots
- Custom steel body and M42 teeth for improved performance
- · Lifetime tooth breakage warranty

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION	
BMHSKIT9	58297640	9-Piece Bi-Metal Hole Saw Kit	
BMHS4-3/8	64278140	Bi-Metal Hole Saw 4-3/8" (111mm) (4" Recessed Lights)	
BMHS5-3/8	64278240	Bi-Metal Hole Saw 5-3/8" (137mm) (5" Recessed Lights)	
BMHS6-3/8	58297540	Bi-Metal Hole Saw 6-3/8" (162mm) (6" Recessed Lights)	
ABS1/2	58295340	Large Quick Connect Arbor	
ABS3/8	64605440	Small Arbor 3/4" to 1-1/8"	
MODEL #	STOCK #	INCLUDES	
BHMSKIT9	58297640	(6) Bi-metal hole saws: 7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2", (1) 3/8" hex shank mandrel, (1) 3/8" qck. chg. mandrel, (2) pilot bits	
BMHS4-3/8	64278140	(1) 4-3/8" Hole Saw	
BMHS5-3/8	64278240	(1) 5-3/8" Hole Saw	
BMHS6-3/8	58297540	(1) 6-3/8" Hole Saw	
ABS1/2	58295340	(1) 1/2" Arbor bit shank	
ABS3/8	64605440	(1) 3/8" Arbor bit shank	

ADJUSTABLE CAN LIGHT HOLE SAW

ACLHS



Adjustable hole saw featuring black oxide blades cleanly and efficiently cuts precise holes in drywall and ceiling tiles.

- 19 blade adjustment positions ranging from 2-1/2" to 7"
- 1/4" increments
- Black oxide blades cut cleanly through drywall and ceiling tiles
- · Hex key adjustment allows for easy movement of blade
- · Includes two dust shields

MODEL #	STOCK #	DESCRIPTIO	N
ACLHS	59705440	Adjustable Can Li	ght Hole Saw
	HEIGHT	WIDTH	WEIGHT
ACLHS	2.17"	8.27"	2.08 lb.

FLEX AUGER BITS

FAB9/16X54



FAB3/8X54



FAB1X54



FAB3/4X54



54" flex auger bits with screw point tips easily drill clean holes through wood inside walls.

- · Pilot feed-screw draws bit into wood
- · Spring steel shaft resists deformation
- . Hole in tip for use with wire and cable pulling grips

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
FABK9/16X54	58297740	9/16" Flex Bit Kit
FAB9/16X54	58296940	9/16" Flex Bit
FAB3/8X54	58296840	3/8" Flex Bit
FAB3/4X54	58296740	3/4" Flex Bit
FAB1x54	58297040	1" Flex Bit
MODEL #	STOCK #	INCLUDES
MODEL # FABK9/16X54	STOCK # 58297740	INCLUDES (1) 9/16" X 54" Flex Bit, (1) Cable Pulling Grip, (1) Folding Placement Tool
		(1) 9/16" X 54" Flex Bit, (1) Cable Pulling Grip, (1) Folding
FABK9/16X54	58297740	(1) 9/16" X 54" Flex Bit, (1) Cable Pulling Grip, (1) Folding Placement Tool
FABX9/16X54 FAB3/8X54	58297740 58296840	(1) 9/16" X 54" Flex Bit, (1) Cable Pulling Grip, (1) Folding Placement Tool (1) 3/8" Flex Bit

FLEX AUGER BIT EXTENSION



For use with bits to extend length to easily drill clean holes through wood inside walls.

- · Extends auger bit lengths
- · Spring steel shaft resists deformation
- 54" overall length
- · Tapered back for easy bit retrieval

MODEL #	STOCK #	DESCRIPTIO	N	
FAE3/16X54	59705340	Flex Auger Bit Ext	ension	
	HEIGHT	WIDTH	DEPTH	WEIGHT
FAE3/16X54	54"	0.91"	0.91"	.11 lb.

FLEXIBLE QUICK CONNECT EXTENSION KIT



Perfect for installing wire in existing walls and ceilings.

- Kit includes everything needed to drill and pull light to medium wire
- Multiple extensions can be joined for increased versatility
- Convenient 1/4" quick connect receivers
- · Auger bit with self-feeding screw tip draws bit through wood
- · Quick connect accepts bits up to 3/4" in diameter
- · Includes:
 - (1) 1/2" O.D. pulling grip
 - (1) 18" Flexible Quick Connect Extension
 - (1) 36" Flexible Quick Connect Extension
 - (1) 3/4" x 4-1/2" auger bit

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION		INCLUDES	
FQCKIT	59705040	Flexible Quick Connect Extension Kit	(1) 1/2" 0.D. pulling grip, (1) 18" Flexible Quick Connect Extension, (1) 36" Flexible Quick Connect Extension, and (1) 3/4" x 4-1/2" auger bit		
	HEIGHT	WIDTH	DEPTH	WEIGHT	
FQCKIT	59.5" Assembled	3/4" (max bit width)	1"	0.66 lb.	

FLEXIBLE QUICK CONNECT EXTENSION

FQCE36



36" flexible quick change extension is perfect for installing wire in existing walls and ceilings.

- Flexible shaft allows easy access to difficult and confined areas
- · Quick connect accepts bits up to 3/4" in diameter
- Multiple extensions can be joined for increased versatility
- Convenient 1/4" quick connect receivers

MODEL #	STOCK #	DESCRIPTION		
FQCE36	59704940	Flexible Quick Connect Exte	ension	
	HEIGHT	WIDTH	DEPTH	WEIGHT
FQCE36	36"	1/4" (shank)	0.86"	0.33 lb.

SHIP AUGER BITS

SAB3/4X18



Heavy-duty ship auger bit, featuring a self-feeding screw tip, drills clean holes through nails, wood, vinyl, plastic, and heavy timber.

- · Screw tip draws bit through wood
- · Polished and coated flutes increase removal of cutting material
- . 18" length allows deep drilling without an extension

SAB7/8X18



SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
SAB3/4x18	58295540	3/4" Ship Auger Bit
SAB7/8X18	58295640	7/8" Ship Auger Bit
SAB1X18	58295440	1" Ship Auger Bit
MODEL #	STOCK #	INCLUDES
MODEL # SAB3/4x18	STOCK # 58295540	INCLUDES (1) Ship Auger Bit

SAB1X18



WOOD BORING BITS

WAB3/4X4-1/2



Heavy-duty, self-feeding wood boring bits cut clean holes in wood.

- · Screw tip draws bit through wood
- · Polished and coated flutes increase removal of cutting material
- 4.5" length for drilling in tight spaces

WAB7/8X4-1/2



WAB1X4-1/2



MODEL #	STOCK #	DESCRIPTION
WAB3/4X4-1/2	58296040	3/4" Wood Auger Bit
WAB7/8X4-1/2	58296140	7/8" Wood Auger Bit
WAB1X4-1/2	58295940	1" Wood Auger Bit
MODEL #	STOCK #	INCLUDES
WAB3/4X4-1/2	58296040	(1) Wood Auger Bit
WAB7/8X4-1/2	58296140	(1) Wood Auger Bit
WAB1X4-1/2	58295940	(1) Wood Auger Bit

DRILL / TAP BITS



Our drill/tap bits feature a one-piece drill and tap design that saves time by drilling, tapping, countersinking, and deburring in one smooth operation.

- Made of high-speed steel for durability
- Tapered design prevents thread damage
- · For use with steel, copper, brass, aluminum, and plastic

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
CDTBKIT	58296340	Combination Drill and Tap Set
MODEL #	STOCK #	INCLUDES
CDTBKIT	58296340	(6) Drill/Tap Bits: 6-32 NC, 8-32 NC, 10-24 NC, 10-32 NC, 12-24 NC, 1/4-20 NC, (1) Quick Change Adapter

STEP DRILL BITS



Step drill bits for clean hole drilling in metals.

- · Laser etched sizes for easy identification
- Tri-lobe shank reduced reduces slipping and provides a firm grip in the chuck
- Double flute design for a true, round hole every time



MODEL #	STOCK #	DESCRIPTION
SB3/16-7/8	58297440	3/16"-7/8" Step Drill Bit
SB1/4-1-3/8	58297240	1/4"- 1-3/8" Step Drill Bit
MODEL #	STOCK #	INCLUDES
MODEL # SB3/16-7/8	STOCK # 58297440	INCLUDES (1) Step Drill Bit

CARBIDE TIPPED HOLE CUTTERS



The carbide tipped hole cutters have a durable cutting design specifically for stainless steel and sheet metal.

- · Precision ground teeth for fast cutting of clean, round holes
- Double helix grooves for faster starts
- Grooved edge design to prevent extended penetration

MODEL #	STOCK #	DESCRIPTION
CHCKIT4	58295140	Carbide Tipped Hole Cutter Kit
CHC7/8	58295040	7/8" Carbide Tipped Hole Cutter
CHC1-1/8	58294940	1-1/8" Carbide Tipped Hole Cutter
MODEL #	STOCK #	INCLUDES
CHCKIT4	58295140	(3) Carbide Tipped Hole Cutters: 7/8", 1-1/8", 1-3/8" ; (4) Pilot drill bits; (1) Allen wrench
CHC7/8	58295040	(1) 7/8" Carbide tipped hole cutter: For use with 1/2" fittings
CHC1-1/8	58294940	(1) 1-1/8" Carbide tipped hole cutter: For use with 3/4" fittings



As one of the most innovative tool lines in the industry, Southwire Tools and Equipment has provided material handling solutions that move material quickly, easily, and safely. With a product line that includes reel jacks, SIMpullTM CoilPAKTM carts, and Wire Wagon[®] carts, you can complete the job better than ever before while saving time and energy.



SIM*pull*™ FLANGE

SF-01



The SIMpull ™ Flange's patented shaft less design, safely allows one person to turn a wooden or plastic reel up to 34 in. and 2000 lbs into a time saving, field-installable solution that removes the need to handle heavy jack stands. Each flange rotates independently, and allows free movement of loaded wooden or plastic reels. The SIMpull™ Flange is reusable in the field and can be installed on multiple reels throughout the jobsite.

U.S. PATENT #: US9617112

MODEL #	STOCK #	DESCRIPTION
SF-01	64864901	SIM <i>pull</i> ™ FLANGE



PROJAX™ REEL STANDS





A 10,000 lb. capacity portable reel stand.

- One person can easily transport through most jobsite environments
- Minimum drill recommendations: 18V cordless, equivalent of 1000 in. lb. torque rated, for reels up to 10,000 lb.
- · Easy adjustment for uneven surfaces on jobsite
- · Axle rests on steel rollers for easy wire pay off
- · Axle safety guard ensures that reel will not fall off of jack stands
- Uses an 18V cordless drill to lift wire reels
- PRO-JAX[™] stands can lift up to 10,000 lb. as a pair (4545 kg)
- Can be used with 1 1/4" 3" axle
- · Includes axle storage assembly

MODEL #	STOCK #	DESCRIPTION			
MPJ01	58133201	PROJAX™ (Single)			
MPJ02	58526401	PROJAX™ (Pair)			
	LENGTH	WIDTH	HEIGHT	WEIGHT	
MPJ01 (single)	41"	17"	43"	118 lb.	



QWIKJAX™ REEL STANDS



QWIKJAX™ 3,000 lb. collapsible reel stand (Single)

- 6,000 lb. capacity per pair (2727 kg)
- · One person can easily transport through most jobsite environments
- · Axle safety catch hook ensures that reel will not fall off of jack stands
- · Axle rests on steel rollers for easy wire pay off
- . Maximum reel height: up to 72" reel
- Quick folding feature for compact storage
- · Sliding cradle for quick adjustments on large reels
- · Easy-to-use, one person setup and operation
- · Easy adjustment for uneven surfaces on jobsites

MODEL #	STOCK #	DESCRIPTION			
QJ-01	64237801	QWIKJAX™ Portable Reel Stand (Single)			
	DEPTH	WIDTH	HEIGHT	WEIGHT	
QJ-01	29"	17"	29" - 42"	35 lb.	



MAXISJAX® REEL STANDS





A unique reel stand that will quickly set up and lift wire reels safely and efficiently without the hassle of conventional stands.

- · Easy to store and transport
- · Breaks down into a compact storable tool
- · Jaw clamps onto axle so that wire reels won't come off or fall over
- Multiple steel rollers make it easy for one person to roll off heavy wire
- Max lever allows one person to lift wire reels off the ground with minimal effort
- Uses either a 1-1/2" to 2" rigid pipe for an axle
- . Works on reels up to 48" tall

MODEL#	STOCK #	DESCRIPTION			
MJ707	56824501	MAXISJAX® - 3,000 lb. Reel Stands (Pair)			
	HEIGHT	WIDTH	LENGTH	WEIGHT	
MJ707	37"	7"	9.5"	54 lb.	



SCREWJAX™



Screw-type reel jacks 22"-54" (single)

- · Roller bearing incorporated into jax rollers
- · Powder-coat finish for superior durability and corrosion resistance
- Rollers fit inside axle grooves to prevent axle running
- · Wide welded steel base for added strength and stability
- · Telescoping mid section for adjustability
- · Strut lock pin for added strength and stability
- 2,500 lb. capacity (Each) 5,000 lb. pair (2272 kg)

MODEL #	STOCK #	DESCRIPTION			
CJ01	59892901	No. 70 Screw-Type Reel Jack			
	LENGTH	WIDTH HEIGHT WEIGHT			
CJ01	21"	24"	54" Max Height	42 lb.	

SCREWJAXTM





Screw-Type reel jacks 13"-27" (single)

- Roller bearing incorporated into jax rollers
- Powder-coat finish for superior durability and corrosion resistance
- · Rollers fit inside axle grooves to prevent axle running
- · Wide welded steel base for added strength and stability
- · Telescoping mid section for adjustability
- · Strut lock pin for added strength and stability
- 2,500 lb. capacity (Each) 5,000 lb. pair (2272 kg)

MODEL #	STOCK #	DESCRIPTION			
CJ02	59893001	No. 60 Screw-Typ	e Reel Jack		
	LENGTH	WIDTH HEIGHT WEIGHT			
CJ02	15"	15"	28" Max Height	22 lb.	

PRO-JAX™ AXLE







PRO-JAX™ axle

- · Heavy duty 10,000 lb. capacity
- · Low deflection high strength steel
- Available in 60" and 72" lengths

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION
PJA-01	58948701	10,000 lb. capacity 72" reel axle
PJA-02	59161901	10,000 lb. capacity 60" reel axle

PROJAX™ RISERS

PJS-01



RISERS

• Enables PROJAX™ reel stands to be used with 104" reels.

MODEL #	STOCK #	DESCRIPTION
PJS-01	58955301	Riser attachment for PROJAX [™] reel stands (Pair)

SIM *pull™ Coil* PAK™ CART

CK01





The best material handling solution for SIMpull™ CoilPAK™ Payoffs.

- Rugged transport system for (8) SIMpull[™] CoilPAK[™] Payoffs with an integrated pay off system
- Allows SIMpull[™] Coi/PAK[™] Wire Payoffs to be added or changed easily without impacting other SIMpull[™] Coi/PAK[™] Wire Payoffs
- Innovative staging springs allow you to secure and organize up to 8 wires
- Best for scenarios where conductors are frequently changing, adding or dropping
- Cart includes 8" total lock casters
- · Easy to use in hallways and fits through standard doors
- · Individual wire feeds similar to a wire cart

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION			
CK01	58386901	SIM <i>pull</i> ™ <i>Coil</i> PAK™ CART			
	LENGTH	WIDTH	HEIGHT	WEIGHT	
CK01	52"	24"	90"	178 lb.	

SIM pull™ Coil PAK™ UTILITY CART



Multipurpose cart designed for SIM*pull™ Coil*PAK™ solutions.

- Can hold and transport a verity of materials, tools, supplies, and SIMpull™ CoilPAK™ Payoffs
- Ability to hold up to 8 SIMpull[™] CoilPAK[™] Payoffs
- Incorporated low payoff height for easy circuit wire pulling at any angle
- Compact cart design for easy storage and transport
- · Cart includes 8" total lock casters

MODEL #	STOCK #	DESCRIPTION			
UC100	58617201	SIM <i>pull</i> ™ <i>Coil</i> PA	K™ UTILITY CART		
	LENGTH	WIDTH	HEIGHT	WEIGHT	
UC100	46"	24"	45"	107 lb.	

SIM pull™ BARREL™ HAND TRUCK





The SIMpull™ BARREL™ Hand Truck makes it easy to handle and transport your SIMpull™ BARREL™ Drum.

- The SIMpull™ BARREL™ Hand Truck, when used with the SIMpull™ BARREL™ package, replaces the old wire cart and reels and the issues associated with them
- The hand truck includes a wire payoff feature, and is designed to transport the SIMpull™ BARREL™ package anywhere on the jobsite
 - through narrow electrical room doors, over cords on the floor or construction gravel
- Solid rubber tires for no-flat jobsite peace of mind
- Rugged steel frame with unique design

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
SBT01	58133001	SIM <i>pull</i> ™ BARREL™ HAND TRUCK		
	LENGTH	WIDTH	HEIGHT	WEIGHT
SBT01	27"	24.5"	61"	145 lb.

SIM pull™ BARREL™ TRIPOD



WE'VE GOT IT **MADE IN AMERICA**[™] The SIMpull™ BARREL™ Tripod is a circuit wire payoff accessory used in connection with your new SIMpull™ BARREL™ Drum.

- The SIMpull™ BARREL™ Tripod is a circuit wire guide that mounts easily on the rim of the SIMpull™ BARREL™
- This wire guide system provides unique means for guiding the paralleled conductors out of the barrel when it is not on the SIMpull™ BARREL™ Hand Truck.

MODEL #	STOCK #	DESCRIPT	ON		
SBT02	58133101	SIM <i>pull</i> ™ BARREL™ TRIPOD			
	LENGTH	WIDTH	HEIGHT	WEIGHT	TAP OUTSIDE DIAMETER
SBT02	36.5"	6.25"	6.25"	5.5 lb.	4.98"

WIRE WAGON® 510





- Holds up to 14 2,500' spools or a combination of 2,500' and 1,000' spools
- Holds several hundred feet of conduit as well as all the additional materials and tools needed for your entire work day
- Designed with a full 24"x60" metal top shelf for storage and assembly
- Cart includes 8" total lock casters
- 2,000 lb. capacity



SPECIFICATIONS

l	MODEL #	STOCK #	DESCRIPTION	N	
	WW510	56824801	Wire Wagon® 510		
		LENGTH	WIDTH	HEIGHT	WEIGHT
	WW510	60.5"	29.5"	46.25"	191 lb.

WIRE WAGON® 520

WW520





MC cable and conduit cart.

- Holds 4 spools of 1,000' MC cable
- Allows for different sizes and colors on one rack
- · Comes standard with two sets of axles for wider than normal spools
- Eliminate spool jacks and the unnecessary set up and tear down time between pulls
- · Cart includes 8" total lock casters
- . Holds up to 1,000 ft. of conduit or strut
- 2,000 lb. capacity

MODEL #	STOCK #	DESCRIPTION	N	
WW520	56825001	Wire Wagon® 520		
	LENGTH	WIDTH	HEIGHT	WEIGHT
WW520	60"	52"	13"	125 lb.

WIRE WAGON® 530

WW530





Large spool cart.

- . Holds 8 spools up to 16" in diameter
- Storage for extra tools, spools and materials
- · Easy to load and unload
- · Cart includes 8" total lock casters
- 1,000 lb. capacity

SPECIFICATIONS

MODEL#	STOCK #	DESCRIPTIO	N	
WW530	56825101	Wire Wagon® 530		
	LENGTH	WIDTH	HEIGHT	WEIGHT
WW530	50"	29.5"	42"	155 lb.

WIRE WAGON® 535

WW535





Large capacity wire cart.

- Holds up to 20 500' spools of 12 AWG and 14 AWG or 6 -2500' spools of 12 AWG and 14 AWG
- Will hold up to 9 boxes of data cable or 6 1,000 ft. spools
- Extra storage shelf for tools, spools and materials
- · Easy to load and unload, there are no axles or pins to remove
- · Cart includes 8" total lock casters
- 1,000 lb. capacity

MODEL #	STOCK #	DESCRIPTIO	N	
WW535	56825201	Wire Wagon® 535	i	
	LENGTH	WIDTH	HEIGHT	WEIGHT
WW535	50"	29.5"	42"	142 lb.

WIRE WAGON® 538



Service cart.

- Holds up to 12 500' spools of 12 AWG and 14 AWG
- Constructed with 5/8" solid steel bar to support almost any combination of wire spools
- · Easy movement around the jobsite
- · Folds flat in seconds for minimal storage
- · Great for service trucks or vans

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
WW538	56825401	Wire Wagon® 538	3	
	LENGTH	WIDTH	HEIGHT	WEIGHT
WW538	32.5"	26.5"	36.5"	25.5 lb.

WIRE WAGON® 550



Mobile print table and work station.

- No wasting time looking around the jobsite for something to use as a print table
- No wasting time back and forth to a stationary print table
- · Move your plans and materials right to the work area
- 1,000 lb. capacity
- · Cart includes 8" total lock casters
- · Multiple uses:
 - Mobile print table
 - · Material shelf
 - · Conduit rack
 - Portable work bench

MODEL #	STOCK #	DESCRIPTIO	N	
WW550	56825501	Wire Wagon® 550		
	LENGTH	WIDTH	HEIGHT	WEIGHT
WW550	54"	32"	42"	180 lb.

WIRE WAGON® 560



Conduit rack.

- · Cart includes 6" casters
- Fast and simple collapsible design for storage and transportation
- . Multipurpose conduit, pipe, and strut rack
- 1,000 lb. capacity

MODEL #	STOCK #	DESCRIPTIO	N	
WW560	58986801	Wire Wagon® 560		
	LENGTH	WIDTH	HEIGHT	WEIGHT
WW560	58.5"	34"	19"	140 lb.

SIX PACK MAC™ WIRE CART

PM06



Compact wire dispensing cart.

- Stores in one-third of the space of conventional dispensers
- · Reel spindles fold and lock for convenient storage
- · Fits through a 30" doorway
- . Two 10" wheels with one 8" locking swivel caster for easy maneuverability
- · Welded wire guides for easy payoff
- Stores up to (6) 2,500' spools (18" diameter) of wire
- Travels through a 36" doorway
- · Can be shipped via UPS

MODEL #	STOCK #	DESCRIPTIO	N	
PM06	783350	SIX PACK MAC™ Wire Cart		
	LENGTH	WIDTH	HEIGHT	WEIGHT
PM06	28.75"	39.5"	31.5"	81 lb.

TEN PACK MAC™ WIRE CART



Mobile wire dispensing cart.

- Handle/guide loop position controlled by plunger: 4-positions, no loose parts
- . Spindles fold up & lock
- · Mast swivels 360 degrees, but can be locked in fixed positions
- · Mast may be removed for compact storage
- 4-heavy duty, locking 8" swivel casters
- · Feed handle and guide loops are built into one part

MODEL #	STOCK #	DESCRIPTIO	N	
PM10	783366	TEN PACK MAC™ Wire Cart		
	LENGTH	WIDTH	HEIGHT	WEIGHT
PM10	33"	41"	56.5"	250 lb.

CADDY MAC™ #1 DOLLY



Transports spools on spindles and works as a dolly. Wire is dispensed while laying flat.

- 1/2" solid spindles are attached to cart.
- · No loose pieces. Spindles lock into place, even during transport.
- · Spindles swing out to set position for convenient loading of wire spools
- . Can be used with Handi Mac for extra storage

SPECIFICATIONS

MODEL	# STOCK #	DESCRIPTIO	N	
CM01	783398	CADDY MAC™ #1 Dolly		
	LENGTH	WIDTH	HEIGHT	WEIGHT
CM01	20"	26"	49"	50 lb.

CADDY MAC™ #2 DOLLY



MADE IN AMERICA™

CADDY MAC™ #2 Dolly holds 16 spools of #10 AWG or 24 spools of #12 AWG.

- Spindles can be easily removed for the occasional use of larger spools
- Inner spindles store in special loops which can hold four pieces and will not fall out during transportation.
- Hinge design allows easy access to all spools for wire dispensing and folds for compact storage.

MODEL #	STOCK #	DESCRIPTION		
CM02	783395	CADDY MAC™ #2 Dolly		
	LENGTH	WIDTH	HEIGHT	WEIGHT
CM02	14"	26"	49.5"	63 lb.

CADDY MAC™ #3 DOLLY

CM03



MADE IN AMERICA™

CADDY MAC™ #3 Dolly is a versatile wire cart that doubles as a dolly.

- Uses five 5/8" diameter spindles
- . Unique spindle locking system, no loose clips
- . Storage loops retain up to 5 spindles
- · Dual wire guides
- · Large spool capacity

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION		
CM03	783400	CADDY MAC™ #3 Dolly		
	LENGTH	WIDTH	HEIGHT	WEIGHT
CM03	21.5"	26.5"	47.25"	78 lb.

SPOOL MAC™ CART

SM-01



Wire payoff cart.

- All steel frame construction
- 10" wheels for easy transport over rough terrain
- · Rollers on spool arm allow for smooth reel rotation and easy payoff
- . No loose pieces to account for
- · Folding design allows for compact storage
- Fits through 32" doorways
- 350 lb. (160 kg) load capacity

MODEL #	STOCK #	DESCRIPTION	N	
SM-01	783444	SP00L MAC™ Car	t	
	LENGTH	WIDTH	HEIGHT	WEIGHT
SM-01	16"	31.5"	63.5"	80 lb.



HANDI MAC™



Wire dispenser.

- Provides extra spool storage for Caddy Mac[™] 1 or as a free standing wire dispenser
- . Holds up to 8 additional spools
- . Spindles are made of sturdy 3/8" steel bar

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION		
HM-01	783490	HANDI MAC™ Wire Dispenser		
	LENGTH	WIDTH	HEIGHT	WEIGHT
HM-01	22.5"	12.5"	10"	7.5 lb.

WIRESMART HAND CADDY



MH8110

- . Includes 2-brackets to mount to floor or stud
- . Versatility of 3 items in 1
- · Square-tube steel with a premium powder coat finish
- · Convenient carry handle now included
- . Max weight: 50 lbs. With arms, 100 lbs. With REEL

MH8120

- . Mounts to cable dispenser Mh8110 (sold separately)
- . Stacks easily, not tools required
- · Allows for double the capacity
- Inside capacity: 5.5" min. Inside coil diameter, outside capacity: 17" min. Outside coil diameter
- . Max weight (separate unit): 50 lbs

MH8010

- · Convenient hand carrying design
- . Square-tube steel with a premium powder coat finish
- · Shipped knocked down, takes up less shelf space
- · Convenient one hand portability

MODEL #	DESCRIPTION	INSIDE CAPCITY	OUTSIDE CAPACITY	MAX WEIGHT
MH8110	Cable Dispenser	5.5" Min. Inside Coil Diameter	17" Min. Outside Coil Diameter	50 lbs. W/Arms, 100 Lbs. W/Reel
MH8120	Cable Dispenser Add-On	5.5" Min. Inside Coil Diameter	17" Min. Outside Coil Diameter	50 lbs. Each Dispenser, 100 Lbs. Total
MH8010	Hand Caddy	8 Max. Spools 7" Diameter X 5" Wide	4 Max. Spools 7" Diameter X 6-10" Wide	

STOR MAC™ 60

SM60





Security storage cabinet.

- · Tough steel wire mesh
- Four 6" heavy duty casters (standard)
- · For high visibility storage
- · Reinforced frame & door
- · Removable shelves
- · Lockable doors
- Load capacity 1,500 lb.

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
SM60	784920	STOR MAC™ 60		
	LENGTH	WIDTH	HEIGHT	WEIGHT
SM60	33.75"	63.5"	58"	345 lb.

STOR MAC™ 48

SM48





Security storage cabinet.

- · Tough steel wire mesh
- Four 6" heavy duty casters (standard)
- · For high visibility storage
- Reinforced frame & door
- Removable shelves
- Lockable doors
- Load capacity 1,500 lb.

MODEL #	STOCK #	DESCRIPTIO	N	
SM48	785921	STOR MAC [™] 48		
	LENGTH	WIDTH	HEIGHT	WEIGHT
SM48	33.75"	51.5"	58"	310 lb.

KNOCK DOWN STOR MAC™

KDSM-60



A collapsible security storage cart for those who require high visibility of contents.

- Quickly collapses and assembles in under 5 minutes
- Made In America
- Four 6" heavy duty casters (standard)
- · Reinforced frame and door
- Removable shelves for adjustable storage
- 1,500 LB load capacity
- · Lockable doors work with puck or pad locks
- · Reinforced frame and door
- · Removable shelves for adjustable storage
- · Four 6" heavy duty casters (standard)

MODEL #	STOCK #	DESCRIPTION		
KDSM-60	786920	Knock Down Stor Mac [™]		
	HEIGHT	WIDTH	LENGTH	WEIGHT
KDSM-60	58.5"	62.5"	32"	425 lbs.







STOR MAC™ 30

SM30



A mobile, heavy-duty stacking container.

- · Tough steel wire mesh
- Four 6" heavy duty casters (standard)
- · For high visibility storage
- · Reinforced frame & door
- · Removable shelves
- Lockable doors
- Load capacity 1,500 lb.

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
SM30	785920	STOR MAC™ 30		
	LENGTH	WIDTH	HEIGHT	WEIGHT
SM30	33.75"	31.5"	58"	210 lb.

TAINER MAC™ 60





A mobile, heavy-duty stacking container.

- Transports 1,500 lb.. / 680 kg of material
- · Large storage capacity
- Four 6" heavy-duty lockable casters
- · Posts for stacking & steering
- Fits through 36" (91 cm) doorway
- Stacks with other Sumner Stacking Macs

MODEL #	STOCK #	DESCRIPTION		
TM60B	784990	TAINER MAC™ 60)	
	LENGTH	WIDTH	HEIGHT	WEIGHT
TM60B	56"	32"	40"	200 lb.

WELDBOX™ 3617

WB3617



The ideal storage chest for all welders & electricians.

- Two-point latching system requires only one lock
- · Caster ready
- 16-gauge steel construction
- · Powder-coat finish for superior durability and corrosion resistance

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTION	N	
WB3617	779928	WELDBOX™ 3617		
	LENGTH	WIDTH	HEIGHT	WEIGHT
WB3617	22.5"	36"	17"	97.9 lb.

WELDBOX™ 2812

WB2812



Storage chest.

- 16-gauge steel construction
- Powder-coat finish for superior durability and corrosion resistance

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
WB2812	779911	WELDBOX™ 2812		
	LENGTH	WIDTH	HEIGHT	WEIGHT
WB2812	11"	28.375"	12"	30.8 lb.

WELDBOX™ 2008

WB2008



Tool storage box.

· Powder-coat finish for superior durability and corrosion resistance

MODEL #	STOCK #	DESCRIPTION	N	
WB2008	779910	WELDBOX™ 2008		
	LENGTH	WIDTH	HEIGHT	WEIGHT
WB2008	9.5"	20.125"	8.5"	12.1 lb.

BI-FOLD CABINET





Bi-fold cabinet gives you unrestricted access to your tools. With heavy duty shelves and a single locking point.

- Recessed lock housing for protection against theft with one-time lock installation
- Powder-coat finish for superior durability and corrosion resistance
- . Heavy duty 16 gauge box construction
- · Welded shelves
- · Heavy duty hinges to resist break in
- Casters included

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
CB603065	598227	Bi-Fold Cabinet		
	LENGTH	WIDTH	HEIGHT	WEIGHT
CB603065	14"	120"	65"	470 lb.

TWO DOOR CABINET



Two door cabinet gives you two ways to store your tools. With heavy duty shelves and a large vertical storage area, you can easily organize and secure your tools.

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- · Powder-coat finish for superior durability and corrosion resistance
- · Caster-ready 7 gauge steel skids
- Heavy duty 16 gauge box construction
- Welded shelves
- · Heavy-duty hinges to resist break in
- Casters not included

MODEL #	STOCK #	DESCRIPTIO	N	
CB602460	598228	Two Door Cabinet	t	
	LENGTH	WIDTH	HEIGHT	WEIGHT
CB602460	24"	60"	60"	385 lb.

PIANO BOX



Piano boxes offer, at a glance, storage for both small and large tools, making it possible to organize and secure your livelihood, save time, and reduce costs on the jobsite.

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- . Heavy-duty 16 gauge box construction
- · Welded shelves
- · Heavy-duty hinges to resist break in
- Casters not included

PB603049



SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
PB603049	598224	Piano Box		
	LENGTH	WIDTH	HEIGHT	WEIGHT
PB603049	30"	60"	48.5"	337 lb.

PIANO BOX



Piano boxes offer, at a glance, storage for both small and large tools, making it possible to organize and secure your livelihood, save time, and reduce costs on the jobsite.

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy-duty 16 gauge box construction
- Welded shelves
- · Heavy-duty hinges to resist break in
- Casters not included

MODEL #	STOCK #	DESCRIPTIO	N	
PB483048	598223	Piano Box		
	LENGTH	WIDTH	HEIGHT	WEIGHT
PB483048	20"	48"	48"	287 lb.

PIANO BOX



Piano boxes offer, at a glance, storage for both small and large tools, making it possible to organize and secure your livelihood, save time, and reduce costs on the jobsite.

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- · Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy-duty 16 gauge box construction
- Welded shelves
- · Heavy-duty hinges to resist break in
- Casters not included





SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
PB603034	598222	Piano Box		
	LENGTH	WIDTH	HEIGHT	WEIGHT
PB603034	30"	60"	34"	282 lb.

FIELD OFFICE



Field office offers a large workstation with shelved storage and a single locking point, allowing you to control and secure any jobsite.

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- Heavy-duty 16 gauge box construction
- Welded shelves
- · Heavy-duty hinges to resist break in
- · Casters not included

MODEL #	STOCK #	DESCRIPTION	N	
F0604482	598225	Field Office		
	LENGTH	WIDTH	HEIGHT	WEIGHT
F0604482	44"	60"	82"	678 lb.

COMPACT CHEST

CC482423



Compact chest is a highly mobile storage vault. With the perfect profile for a truck bed and steel fork lift skids, this box will become your workhorse.

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- . Heavy-duty 16 gauge box construction
- · Welded shelves
- · Heavy-duty hinges to resist break in
- · Casters not included

SPECIFICATIONS

MODEL #	STOCK #	DESCRIPTIO	N	
CC482423	598226	Compact Chest		
	LENGTH	WIDTH	HEIGHT	WEIGHT
CC482423	24"	48"	22.5"	145 lb.

MINI COMPACT CHEST

CC191932



Mini compact chest is a highly mobile storage solution that stores easily in about any location.

- Recessed lock housing for protection against theft with one-time lock installation
- Four-way skids allow access from any side, making it easier and faster to transport
- Powder-coat finish for superior durability and corrosion resistance
- Caster-ready 7 gauge steel skids
- . Heavy-duty 16 gauge box construction
- Welded shelves
- · Heavy-duty hinges to resist break in
- Casters not included

MODEL #	STOCK #	DESCRIPTIO	N	
CC191932	630360	Mini Compact Che	est	
	LENGTH	WIDTH	HEIGHT	WEIGHT
CC191932	32"	19"	19"	73 lb.

WARRANTIES

WHAT DOES THIS WARRANTY COVER?

FIVE-YEAR LIMITED WARRANTY ON CONTRACTOR EQUIPMENT

Under Southwire's Contractor Equipment 5-Year Limited Warranty, Southwire Company, LLC warrants that all Southwire Contractor Equipment will be free from manufacturer defects for a period of five (5) years from the date of the original end user's purchase. However, electrical components and consumable parts such as ropes, blades, dies, draw studs, grips, are excluded from this 5-Year Limited Warranty and are subject to the One -Year warranty terms. Under this 5-Year Limited Warranty, the following are also excluded and Southwire Company, LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Southwire Contractor Equipment products that have been modified by any party other than Southwire Company, LLC or its authorized third party designee. This 5-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

THREE-YEAR LIMITED WARRANTY ON MATERIAL BOXES

Under Southwire's Material Boxes 3 -Year Limited Warranty, Southwire Company, LLC warrants that all Southwire Material Boxes will be free from manufacturer defects for a period of three (3) years from the date of the original end user's purchase. Under this Three-Year Limited Warranty for Material Boxes, the following are excluded and Southwire Company, LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Material Boxes that have been modified by any party other than Southwire Company, LLC or its authorized third party designee. This 3-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

ONE-YEAR LIMITED WARRANTY ON ELECTRICAL COMPONENTS AND CONSUMABLE PARTS (WITH 5-YEAR WARRANTY)

Under Southwire's 1-Year Limited Warranty, Southwire Company, LLC warrants that all electrical components and consumable parts such as ropes, blades, dies, draw studs, grips will be free from manufacturer defects for a period of one-year from the date of the original end user's purchase. Under this 1-Year Limited Warranty, Southwire Company, LLC will have no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also

does not cover Southwire electrical components and consumable parts that have been modified by any party other than Southwire Company, LLC or its authorized third party designee. This 1-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

ONE-YEAR LIMITED WARRANTY (STAND ALONE)

Under Southwire's 1-Year Limited Warranty, Southwire Company, LLC warrants that this product will be free from manufacturer defects for a period of one-year from the date of the original end user's purchase. Under this 1-Year Limited Warranty, Southwire Company, LLC will have

no liability for any of the following: normal wear and tear resulting from product use and damage arising out of misuse, abuse, modification, and improper product maintenance. This warranty also does not cover Southwire products that have been modified by any party other than Southwire Company, LLC or its authorized third party designee. This 1-Year Limited Warranty is not transferrable to or enforceable by any person other than the product's original end user.

EXCLUSION OF INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL AND PUNITIVE DAMAGES

SOUTHWIRE MAKES NO WARRANTY THAT SOUTHWIRE CONTRACTOR EQUIPMENT PRODUCTS WILL BE MERCHANTABLE OR FIT

FOR ANY PARTICULAR PURPOSE. SOUTHWIRE MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, OTHER THAN THE RELEVANT WARRANTY SPECIFICALLY SET FORTH IN THIS WARRANTY SECTION. SOUTHWIRE WILL NOT BE LIABLE FOR ANY INCIDENTAL.

CONSEQUENTIAL, NDIRECT, SPECIAL, OR PUNITIVE DAMAGES FOR ANY BREACH OF THIS LIMITED LIFETIME WARRANTY.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

LIMITED WARRANTY AND LIMITATION OF LIABILITY ON SOUTHWIRE METERS & TESTERS

Southwire Company, LLC warrants this product to be free from defects in material and workmanship for five years from the date of purchase. This warranty does not cover fuses, disposable batteries, or damage arising from an accident, neglect, misapplication, contamination, modification, improper maintenance or repair, operation outside of specifications, or abnormal handling of the product. Southwire's sole liability, and the purchaser's exclusive remedy, for any breach of this warranty is expressly limited to Southwire's repair or replacement of the product. Whether Southwire repairs or replaces the product will be a determination that Southwire makes at its sole discretion. SOUTHWIRE MAKES NO WARRANTY THAT THE PRODUCT WILL BE MERCHANTABLE OR FIT FOR ANY PARTICULAR PURPOSE. SOUTHWIRE MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, OTHER THAN THE WARRANTY SPECIFICALLY SET FORTH HEREIN. SOUTHWIRE WILL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES FOR ANY BREACH OF THIS WARRANTY.

This warranty is void if this product is used for rental purposes. No product reseller is authorized to extend any other warranty on Southwire's behalf relating to this product, and no such reseller warranty will be binding on Southwire. If you have a warranty claim, or if the product needs to be serviced during or after the warranty period set forth above, please contact the Customer Service Department at 855-SWT00LS (855-798-6657). The sender is responsible for all shipping, freight, insurance, and packaging costs associated with sending a product to Southwire. Southwire will not be responsible for lost or damaged products returned pursuant to this warranty. All products returned to Southwire under this warranty should be mailed to:

WARRANTIES

Southwire Tools & Assembled Products Division

Attn: Product Returns 840 Old Bremen Road Carrolton, GA 30117

Phone Number: 1.855.SW.TOOLS

WARRANTY CLAIM INFORMATION/HOW DO YOU GET SERVICE?

For all warranty, customer service, and product return authorizations and inquiries, please contact Southwire's Tools & Assembled Products at:

Southwire Tools & Assembled Products Attention Product Returns 840 Old Bremen Road Carrollton, GA, 30117

Phone Number: 1.855.SW.TOOLS

- 1. All warranty claims must be approved by Southwire's Tools & Assembled Products Warranty Department prior to return of product. If Southwire determines that a product is defective, Southwire will, at its option, repair or replace defective products or defective product components, free of charge.
- 2. Upon approval, Southwire will issue a Product Return Authorization Form which will include instructions on how and where to return the product. The product serial number and the original date of delivery must be set forth on the Product Return Authorization Form.
- 3. Southwire will cover standard freight charges (Courier Ground rate) incurred in connection with products that Southwire ultimately determines to be defective.
- 4. All defective components and defective products that Southwire replaces under these Warranties will become Southwire's property and will be retained by Southwire.

REPAIR YOUR PRODUCT WHEN IT IS OUT OF WARRANTY

Southwire is happy to provide information about where a purchaser can send a product for repair at consumers' own expense, please contact 1.855.SW.TOOLS or visit www.southwiretools.com/tools/home.do for more information about servicing for Southwire Products.

Contractor Equipment | 05.12.2015 | R1

WARRANTY ON SOUTHWIRE ELECTRICIAN'S NON-ELECTRONIC HAND TOOLS

Southwire Company, LLC warrants this product to be free from defects in materials and workmanship for the life of the product. This warranty does not cover normal wear and tear resulting from product use, nor does it cover damage arising out of misuse, abuse, modification, and/or improper maintenance of the product. If the product breaches this warranty, Southwire will replace the product free of charge. If Southwire no longer manufactures the product, then it will, at its option, replace the nonconforming product with a substantially similar Southwire product or refund the purchase price. SOUTHWIRE MAKES NO WARRANTY THAT THE PRODUCT WILL BE MERCHANTABLE OR FIT FOR ANY PARTICULAR PURPOSE. SOUTHWIRE MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, OTHER THAN THE WARRANTY SPECIFICALLY SET FORTH HEREIN. SOUTHWIRE WILL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES FOR ANY BREACH OF THIS WARRANTY.

This warranty is void if this product is used for rental purposes. No product reseller is authorized to extend any other warranty on Southwire's behalf relating to this product, and no such reseller warranty will be binding on Southwire. If the product needs to be serviced, please contact the Customer Service Department at 855-SW.TOOLS (855-798-6657) to obtain a return authorization from Southwire. The sender is responsible for all shipping, freight, insurance, and packaging costs associated with sending a product to Southwire. Southwire will not be responsible for lost or damaged products returned for service or returned under this warranty. All products returned to Southwire under this warranty should be mailed to:

Southwire Tools & Assembled Products Division 840 Old Bremen Road Carrollton, GA 30117

Phone Number: 1.855.SW.TOOLS

NOTES

NOTES

 -
 _

NOTES

NOTES

NOTES

NOTES

 -
 _



WWW.SOUTHWIRE.COM | 1-855-SWTOOLS