


EMT RYMCO®



Electrical Metallic Tubing

RYMCO®
CALIFORNIA 360

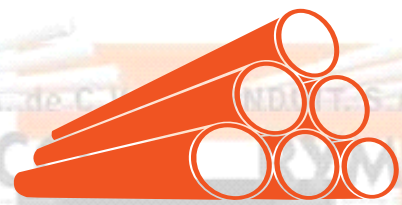

- Standards Compliance : ANSI C80-3 Underwriters Laboratories UL 797.
- Hot dipped galvanized by immersion with a triple layer of protection against corrosion and abrasion the interior wall is covered with a specially formulated non-corrosive lubricating coating, Freedom Coat.
- Used for Commercial and Home installations in electrical systems.
- Standard length: 10 feet.



Tubería EMT* UL 797 / Electrical Metallic Tubing EMT* Steel

Diámetro Nominal Nominal Size		Peso 10 tramos Weight 10 Unit Lengths		Diámetro Externo(1) Outside Diameter(1)		Espesor Nominal (2) Nominal Thickness(2)		Color de cinta Tape Color	Piezas x atado Pieces x bundle	Piezas x paquete Pieces x lift
in.	mm.	lb.	kg.	in.	mm.	in.	mm.			
1/2"	16	30	13.6	0.706	17.93	0.042	1.07	Black	10	700
3/4"	21	46	20.9	0.922	23.42	0.049	1.25	Red	10	500
1"	27	67	30.4	1.163	29.54	0.057	1.45	Blue	10	300
1 1/4"	35	101	45.8	1.510	38.35	0.065	1.65	Red	5	200
1 1/2"	41	116	52.6	1.740	44.20	0.065	1.65	Black	5	150
2"	53	148	67.1	2.197	55.80	0.065	1.65	---	---	120
2 1/2"	63	216	98.0	2.875	73.03	0.072	1.83	---	---	61
3"	78	263	119.3	3.500	88.90	0.072	1.83	---	---	51
3 1/2"	91	349	158.3	4.000	101.60	0.083	2.11	---	---	37
4"	103	393	178.3	4.500	114.30	0.083	2.11	---	---	30

Nota: Tolerancias Aplicables
Note: Applicable Tolerances

- * Recubrimiento Híbrido Interior Aislante y Anticorrosivo
- * Interior Insulated Coating

Largo/Length: 10 Ft. (3.05m) ±1/4 in. (±6.35mm)
(1) 1/2" - 2" ±0.005 in. (16-53 ±0.13mm), 2 1/2" ±0.010 in. (63 ±0.25mm),
3" ±0.015 in. (78 ±0.38mm), 3 1/2" - 4" ±0.020 in. (91 - 103 ±0.51mm) (2)
Solo informativo no requerimiento UL. For info. Only not a UL requirement.

